

formalighting

Presents

MOTOLUX

Motorized Architectural Lighting

Bluetooth Control by CAS[▲]MBI

USER OPERATION MANUAL

First time use of the Casambi App



1. Download the app from Apple App Store or Google Play Store.
2. Turn on your Casambi enabled luminaires.
3. Open the app.
4. Casambi app will automatically find all Casambi enabled luminaires that are switched on.


Note: Users provided with Email address and Password by Forma lighting, please skip to Log in to Network below.

5. Tap on the 'Take all luminaires into use'.
6. Casambi app will automatically add all luminaires to one network and open the 'Luminaires' tab


Tip: If you want to allow other users to use your luminaires, please see the Networks and Sharing section later in this document

Log in to Network


To log in to network, you will need to use the Email and password provided to you by Forma Lighting. Open the Casambi app.

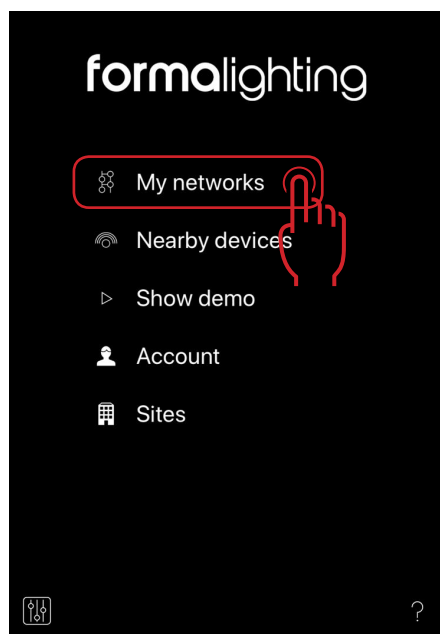

1. Select 'My Networks'

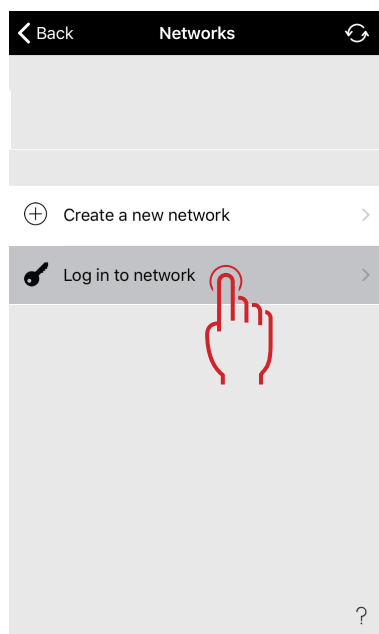

2. Tap 'Log in to Network'

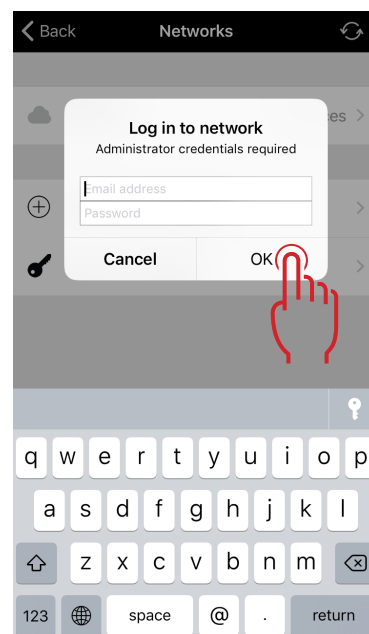

3. Type Email and Password and tap OK.

Basic gestures

Here are the basic gestures to control your lights.

- To turn off or on your luminaire just tap on the luminaire control.
- Pan luminaire control left or right to adjust light level of the luminaire.
- Pan luminaire control up or down to adjust the colour temperature of the luminaire.
- Hold on top of the luminaire control to change the colour and save colours to palette or to open multiple dim sliders.



Reset position of Luminare



Note: Applicable only for slider controlled luminaire (see Slider Control Fixtures).

Luminaire First time activation

- Double tap the *Luminare* Controller > scroll down and tap *Parameters*.
- In *Parameters* tap *Operation Mode* > *Reset*, and wait 45 seconds, while the light head moves to its initial position.
- Tap *Normal* and go Back untill you reach the *Network* screen.

< Back Operation mode	
Reset	1 ✓
Test	2 >
Normal	3 >

Repeat these steps for each first time activation of a luminaire.

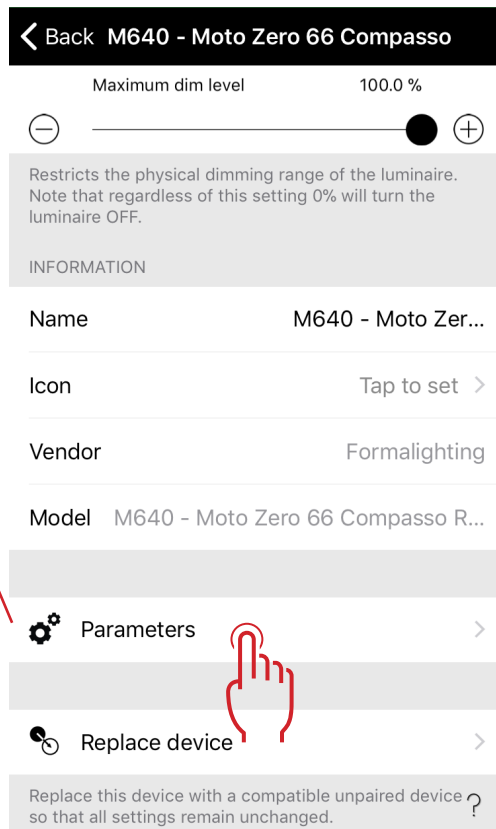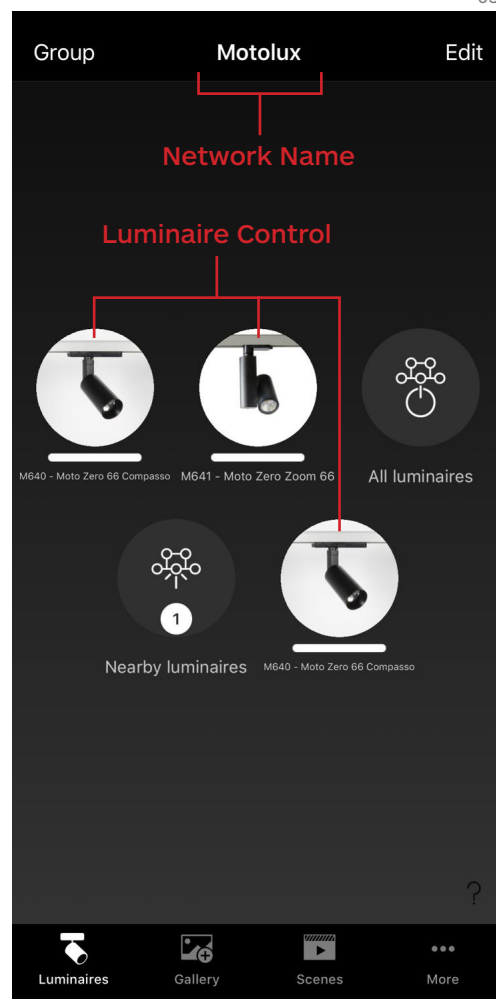

Scenes

1. Control of Luminaires

Slider control

Applicable for items with Driver code 'DS' - scene by Casambi

Note: Creating a scene with a slider controlled fixture will save both the light head position and the Dim/CCT levels.

When a scene is recalled the light head will move to the saved position.

You can control the *Dimmer*, *White intensity*, *Colour* and *Colour Saturation* levels.

Pan controls the horizontal movement of the light head, and *Tilt* the vertical movement of the light head.

Button control



Applicable for items with Driver code 'DC' - Casambi

Note: Creating a scene with a Button controlled fixture will only save the Dim/CCT levels.

Use the buttons to control the movement of the light head, and to aim the light head to the desired position.

Notes:


- **Luminaire control (slider\button) is preset and cannot be changed by the user**
- **CCT/Hue/Saturation Control is only available in selected models**

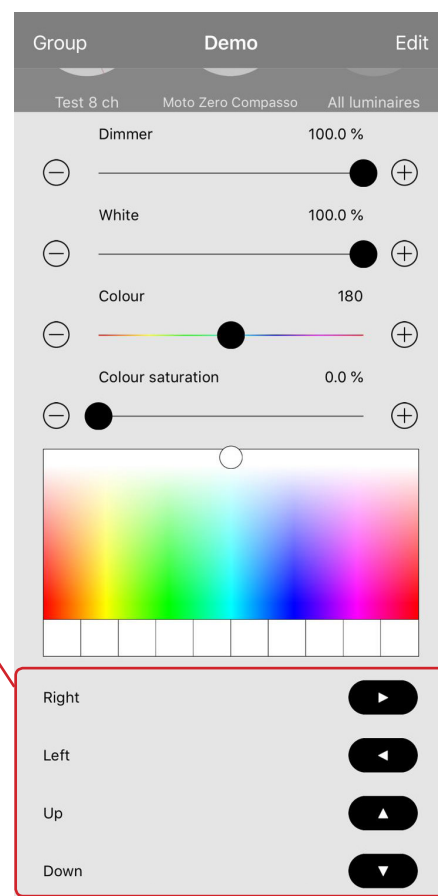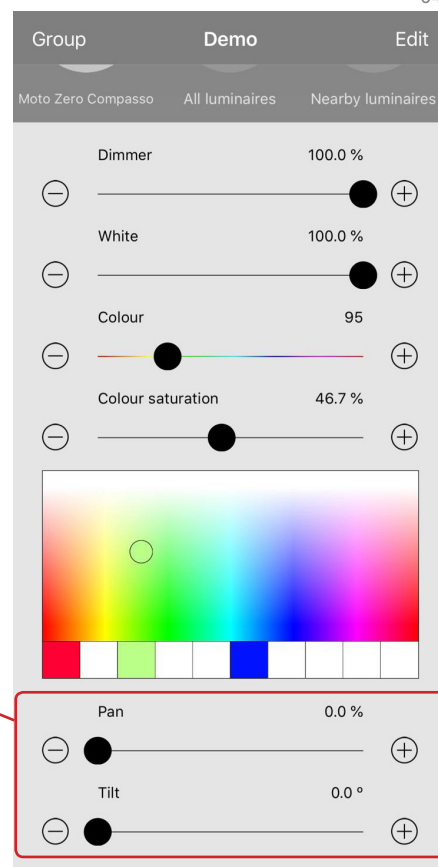

2. Scenes

In the 'Scenes' tab you can create different lightings for different occasions. It is possible to control multiple luminaires with one tap to create perfect ambience. One luminaire can be used in several scenes.

1. Tap on 'Add scene' and enter a name for the scene. Select the 'Add scene' option
2. Select one or multiple luminaire controls and adjust the luminaires for the scene. You can adjust the luminaires separately or if you want to have same dim level or colour for all you can use the 'Luminaires in scene' control to adjust all luminaires in the scene.
3. When you are done editing the scene tap on 'Done'.
4. If you would like to create more scenes tap on the 'Edit' on top right corner and then tap on the '+' sign.

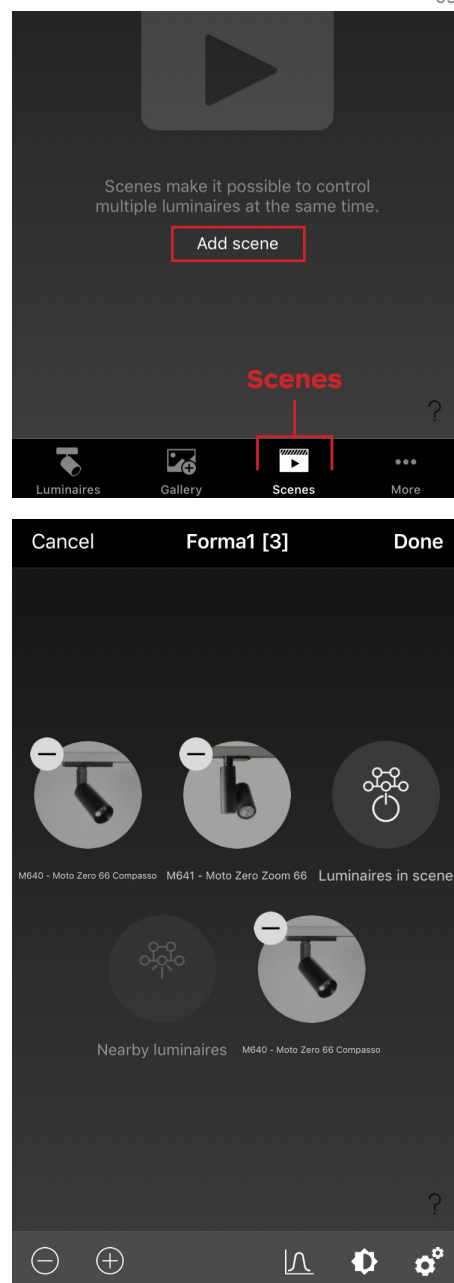

Gallery

The *Gallery* in Casambi app is the most natural way of controlling your luminaires. Take a picture of the room where your luminaires are, and place luminaire controls over them in the picture. You can also take a panorama picture to have more luminaires in one photo.

1. Add a photo of your room to Casambi Gallery by tapping 'Edit' and after that the '+' sign.
2. After you have added a photo you can add luminaire controls to the picture. Tap on the '+' sign, select a luminaire control that you want to add to the picture and tap 'Done'.
3. After you have added controls over all the luminaires in the picture tap 'Done'.


Now you can control your luminaires visually from the picture. No need to guess which luminaire is which.



Timers

With *Timer* function you can create a list of timers that will turn scenes or animations on and off based on time.

1. Go to *More* tab and select *Timers*. Create a new timer by tapping the 'Add a timer'
2. Tap on the 'Controlled scenes' and select a scene or animation that this timer will control
3. Tap on the 'Switches ON' button to set the time when the scene should turn on and tap on the 'Switches OFF' button to set the time when the scene should turn off.
4. It is also possible to set a fade time for the timer so that the scene will come on smoothly.
5. When you are done editing the timer tap on 'Done'.

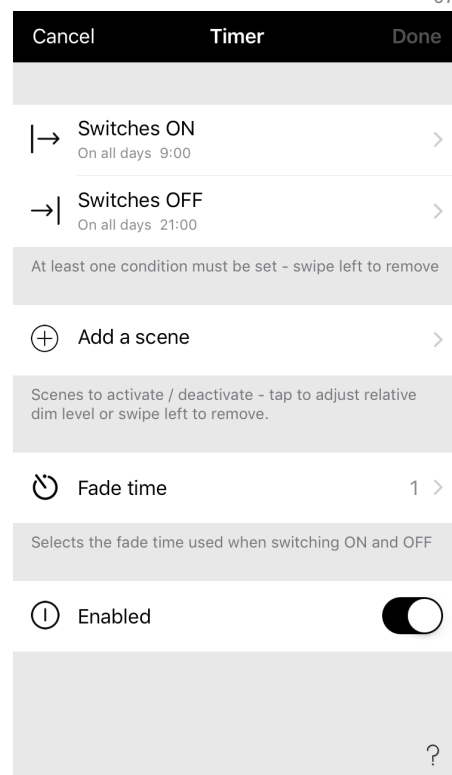


Networks and Sharing

If you want to control your luminaires from more than one mobile device you need to change the *network sharing* settings. As a default the created network is not shared and only stored in the device that created it.

1. Go to 'More' tab and select 'Network setup' and 'Sharing settings'.
2. Tap on the *Sharing* and the 'Sharing mode' screen will open.
3. There are four different sharing modes:
 - *Not Shared*
 - *Administrator only*
 - *Password protected*
 - *Open*

When you select *Administrator only*, *Password protected* or *Open* mode the network will be uploaded to cloud server and then it can be accessed also from other mobile devices.

4. Add an email address and a password for the network. Email address is needed for remote access and password recovery.
5. Confirm your settings with 'Save'.

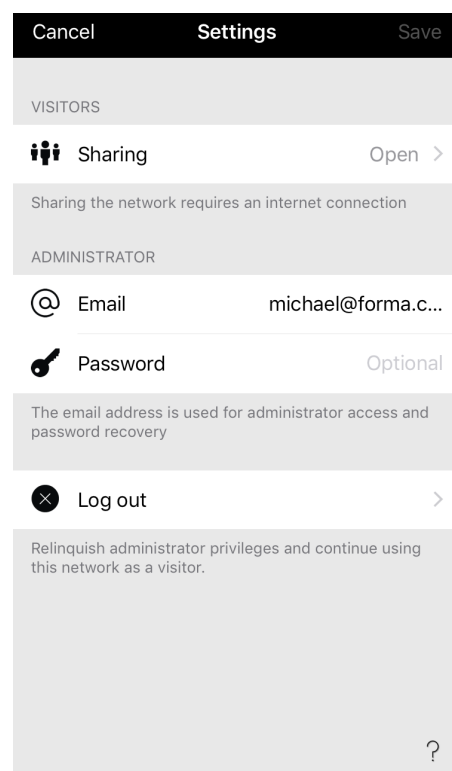



Global presence

Celebrating 50 years of vision, dedication and innovation, Formalighting's versatile and high-quality product offerings extends internationally via our headquarters in Hong Kong, London, Milan, Shanghai and the USA.

Our well chosen and selected partners as well as our affiliated international offices broaden our global presence further in markets such as Australia, Japan, South East Asia, India and the Middle East.

Through our commitment to growth and investment within formalighting's professional team, infrastructure and product ranges, we are able to provide increasing service to our global retail and hospitality clients as well as lighting designers and specifiers strengthening our position as a leading international supplier of innovative architectural lighting solutions and systems.

With 50 years' experience in designing and manufacturing architectural lighting, formalighting's comprehensive portfolio offers a competitive range of European designed and expertly engineered products that carry CB, CE, CCC and UL certifications.

Furthermore formalighting's latest award-winning motorized range of track, pendant, and recessed fixtures, featuring remote-controlled adjustable pan and tilt, dim, dim to warm, tuneable white and beam shaping lens, are available worldwide incorporating the latest, most advanced lighting technologies.

Headquarters

Europe / Milan

Tel (+39) 02 9354 0300

Fax (+39) 02 9343 5117

E- mail formaitalia@formalighting.it

Asia / Hong Kong

Tel (+ 852) 2516 6500

Fax (+ 852) 2516 6525

E- mail forma@forma.com.hk

USA / Atlanta, GA

Tel (+ 800) 906 - 5088

E- mail forma@formalightingusa.com