


## Micro DomoLED

## 1233-K40

DomoLED Round

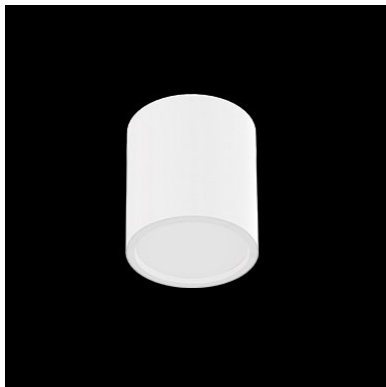

### Round Lensed Surface mounted luminaire with LED

- Front regressed trim made from die cast aluminium with housing made in die formed coated steel.
- Diffuser made of satin acrylic.
- Safety cable included.
- Passive cooling LED source 4000K CRI>80 of 950 nominal lumen.
- System power 8W; System efficacy 67,3lm/W; 538 delivered lumen.
- Supplied with non-dimming driver positioned remotely 220-240V 50/60Hz.
- Dimming options available on request.
- RGB or tunable white options available on request.

LED source package is available on request with a preferred LED colour rendering CRI>90 and/or other colour temperature K options.

### Specifications

Designed and manufactured to comply with European standard EN 60598.



Product code	Finish	Color temperature	CRI	Beam angle	Dim. options	Code
1233	10 - Black	<b>K40-4000K</b>	>80		1-10V DC	0
	11 - White				LaserDIM	5
	75 - Grey					

Ordering code example : 1233 -    K40