

formalighting

**working
catalogue**


2024

Products Index

Aqualuce Round	86	Pixo Catenary	182
Aqualuce Square	86	Pixo Pendant	152
Bullet Floodlight	204	Pixo Pendant Track	106
Bullet Recessed	202	Pixo Retro Catenary	182
Canali	174	Pixo Semi-Recessed	14
Canali Edge	168	Pixo Surface	126
Circo Pro Pendant	164	Polaris Pendant	160
Circo Pro Surface	144	Polaris Recessed	16
Cobra Pro IP66 Adjustable	196	Polaris Surface	134
Cobra Pro IP66 Fixed	194	Polaris Track	112
Colosseo Round	28	Polaris Wallwasher	22
Colosseo Square	30	Punto Adjustable Round	44
Cubetto	142	Punto Adjustable Square	44
Espresso Concave	63	Punto Fixed Round	43
Espresso Wallwasher	64	Punto Fixed Square	43
Galaxis Pro	84	Rolo Track	114
GirasoLED Round	210	Scala	188
GirasoLED Square	210	Solo Round	34
Girofix	82	Solo Square	34
GiroLED	80	Solo S Round	32
Inteso	26	Solo S Square	32
Iride	38	Spotify Concave Round Recessed	51
Logica Recessed	200	Spotify Concave Square Recessed	52
Logica Surface	206	Spotify Pendant	150
Lucciole Ceiling	128	Spotify Round Recessed	55
Lucciole Pendant	156	Spotify Square Recessed	56
Lucciole Pendant Track	110	Spotify Surface	124
Lucciole Wall Mounted	130	Twist Round	132
Lumi Adjustable	48	Twist Square	132
Lumi Fixed	46	Venus Wallwasher Round	75
Micron	66	Venus Wallwasher Square	76
MonoLED	79	Zero Compasso	92
Multi Zero 40	40	Zero Compasso Wallwasher	94
Occhio Pin	69	Zero Due Surface	136
Occhio Slot	71	Zero Due Track	98
Ola Compasso	104	Zero In & Out Recessed	36
Ola Compasso Wallwasher	104	Zero Pendant	158
Ola Zoom	104	Zero Framing Projector Surface	138
Optica Round	59	Zero Framing Projector Track	100
Optica Square	60	Zero Semi-Recessed	12
Ovo	72		













Indoor Lighting

Recessed















Zero Semi-Recessed	Pixo Semi-Recessed	Polaris	Polaris Diffuser	Polaris Wallwasher	Inteso
					
12	14	16	16	22	26
Colosseo Round	Colosseo Square	Solo S Round	Solo Round	Solo S Square	Solo Square
					
28	30	32 New	34 New	32 New	34 New
Zero In & Out	Iride	Multi Zero 40	Punto Fixed Round	Punto Fixed Square	Punto Adjustable Round
					
36	38	40	43	43	44
Punto Adjustable Square	Lumi Fixed	Lumi Adjustable	Spotify Concave Round	Spotify Adjustable Round	Spotify Concave Square
					
44	46	48	51 New	55	52 New
Spotify Adjustable Square	Optica Adjustable Round	Optica Adjustable Square	Espresso Concave	Espresso Wallwasher	Micron
					
56	59	60	63	64	66

Indoor Lighting

Recessed













Occhio Pin Fixed	Occhio Pin Adjustable	Occhio Slot Adjustable	Ovo	Venus Wallwasher Round	Venus Wallwasher Square
					
69	70	71	72	75	76
MonoLED	GiroLED	Girofix	Galaxis Pro	Aqualuce Round	Aqualuce Square
					
79	80	82	84	86	86

Track


Zero Compasso	Zero Compasso Wallwasher	Zero Due	Zero 38 Framing Projector	Zero 85 Framing Projector	Ola Compasso
					
92	94	98	100 New	102 New	104
Ola Compasso Wallwasher	Ola Zoom	Pixo	Lucciole	Polaris	Rolo
					
104	104	106	110	112	114
Eurotype Track System with Dali	Eurotype Track System				
					
118	120				

Indoor Lighting



Surface

Spotify	Pixo	Lucciole Ceiling	Lucciole Wall	Twist Round	Twist Square
					
124	126	128	130	132	132
Polaris	Zero Due	Zero 38 Framing Projector	Zero 85 Framing Projector	Cubetto	Circo Pro
					
134	136	138 New	140 New	142	144

Pendant

Spotify	Pixo	Lucciole	Zero	Polaris	Circo Pro
					
150	152	156	158	160	164

Systems



Canali Edge	Canali
	
168	174

Outdoor Lighting

Linear

Cobra Pro IP66 Fixed	Cobra Pro IP66 Adjustable
	
194	196

Ceiling / Wall Recessed

Scala	Logica 42 Recessed	Bullet Recessed
		
188 New	200	202

Pendant / Surface Mounted

Pixo Retro Catenary	Pixo Catenary	Bullet Floodlight	Logica Surface	GirasoLED Round	GirasoLED Square
					
183 New	183 New	204	206	210	210

Indoor Lighting

Zero

Semi-Recessed 40 | 66



Body

Semi-recessed luminaire with round mounting trim in cast aluminum with springs for trim installation on a ceiling thickness of max. 12mm.

Light head and arm in cast aluminum.

The light head is tiltable up to 90° and rotatable horizontally 355°.

Available in two light head diameter sizes – 40mm and 66mm.

Accessories

Coloured filters, honeycomb louvre. Check page 88 for details.

Finish

Powder coat in black (10), Embossed matt black (65), white (11), or Embossed matt white (54).

LED sources

Light source options: High Power LED. COB LED. CRI: 90 | CCT: 3000K, 4000K. Other CRI and CCT options and Tuneable White version (Zero semi-recessed 66) available on request.

Optic

Lens. Beam Angle: Narrow / Medium / Wide.

Driver

Supplied with non-dimmable remote driver. Dimming Options: 0-10V Dim, DALI. 220-240V 50/60Hz.

Applications

Semi-recessed spotlight marries the versatility and function of a multi-directional adjustable light head with the visual appeal of its refined, round ceiling plate/recessed canopy, ideal for contemporary and minimalist interiors. Application areas: retail, hotels, museums, window displays.

Related Products

Zero In & Out Recessed
P.36

Zero Track Series
P.92-98






Zero Projector Track
P.100-103

Zero Due Surface
P.136

Zero Projector Surface
P.138-141

Zero Pendant
P.158

Zero Semi-Recessed

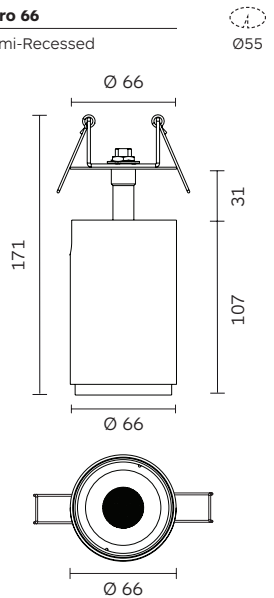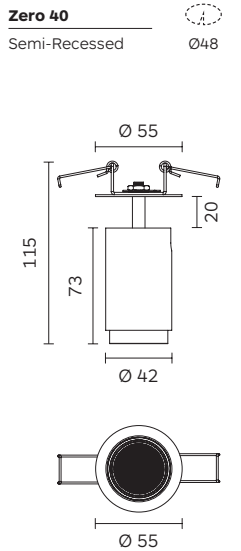

Code ordering example: **R O 9 2 B C 3 1 - 9 0 3 0 1 6 D 0 1 0**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Zero Semi-Recessed 40	RO92	BC31 COB LED	90	30 3000K	6W	705 lm	16 / 26 / 36	D0 No Dim	10 Black
		40 4000K				770 lm		DA Dali Dim	65 Matt Black
		BR21 High Power LED			4W	439 lm	07	DC CASAMBI	11 White
						483 lm		D1 0-10V Dim	54 Matt White
Zero Semi-Recessed 66	RP62	BC31 COB LED	30	3000K	11W	1160 lm	11 / 16 / 32		
		40 4000K				1258 lm			
		BR21 High Power LED			6W	574 lm	05		
						636 lm			
	IU21	TW COB LED	TW	2700K-6500K	13W	1290 lm	16 / 25 / 48		
	GU53	Retrofit MR16-GU5.3	00	00	/	/	00	00 No Driver	

Notes:

* For complete code ordering information, please see pages 214-215.

** For other CCT options, please contact us.

For related accessories, please see pages 88-89.

For the most updated product information, please go to our website.

Pixo

Semi-Recessed 25



Body

Semi-recessed luminaire with round mounting trim in cast aluminum with springs for trim installation on a ceiling thickness of max. 20mm.

Light body in extruded aluminum.

Available in three different lengths to suit any various ceiling heights.

Exchangable front ring in wide range of colours.

Accessories

N/A

Finish

Powder coat in black (10), Embossed matt black (65), white (11), or Embossed matt white (54).
Exchangable front ring in different colours.

LED sources

Light source options: High Power LED.
CRI: 90 | CCT: 3000K, 4000K.
Other CRI and CCT options available on request.

Optic

Lens.
Beam Angle: Narrow / Medium / Wide.


Driver

Supplied with non-dimmable remote driver.
Dimming Options: 0-10V Dim, DALI.
220-240V 50/60Hz.



Applications

A cylindrical, minimalist pendant luminaire offering ambient light, designed to blur the line between architectural and decorative.
Application areas: residential, hotels, restaurants, retail, corridors.

Related Products



Pixo Semi-Recessed

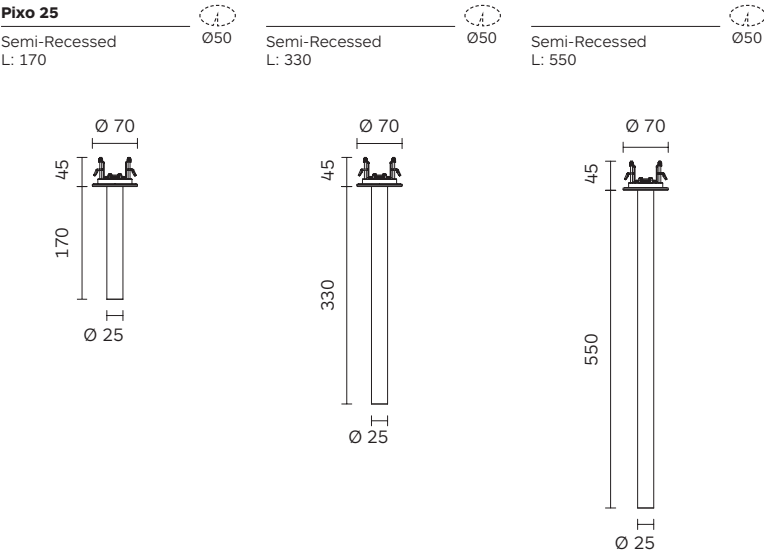

Code ordering example: **R P 3 3 B N 1 1 - 9 0 3 0 1 4 D 0 1 0**

	Product Code	Product Length	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Pixo 25 Semi-Recessed	RP33	170	BN11 High Power LED	90	30 3000K	2W	230 lm	14 / 20 / 26 / 32	D0 No Dim	10 ■ Black
	RP34	330			40 4000K		260 lm		DA Dali Dim	65 ■ Matt Black
	RP35	550							D1 0-10V Dim	11 □ White 54 □ Matt White

Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For the most updated product information, please go to our website.

Polaris

Designed by Franco Mirenzi (Registered)



Body

A rectangular-shaped mounting trim in cast aluminum with springs for trim installation on ceiling thickness 2-25mm or brackets for trimless installation on ceiling thickness 2-25mm. Luminaire body in cast aluminum with integrated diamond faceted screen made from thermoplastic.

Polaris 20 available also with satin opal diffuser. Available in various LED light head configurations. Available in three sizes: **Polaris 20** (only in fixed version but available with a satin opal diffuser), **Polaris 30** (in both fixed and adjustable versions), **Polaris 65** (only in fixed version but with IP44). For the Polaris 30 adjustable version, the light heads collectively tilt from 0° to 35°.

Accessories

N/A

Finish

Powder coat in black (10), Embossed matt black (65), white (11), or Embossed matt white (54) colour. Option for either white or black integrated thermoplastic screen.

LED sources

Light source options: High Power LED. CRI: 90 | CCT: 3000K, 4000K. Other CRI, CCT and Tuneable White options available on request.

Optic

Lens plus thermoplastic screen. UGR < 16. Polaris 20 available also with satin opal diffuser. Beam Angle: Medium / Wide.

Driver

Supplied with non-dimmable remote driver. Dimming Options: 0-10V Dim, DALI, Phase, CASAMBI.

Applications

An innovative solution for high performance, uniform illumination with optimal visual comfort. The miniature light heads and optics create a high definition, glare-controlled, circular light emission. Application areas: residential, hotels, restaurants, retail, corridors.

Related Products


Polaris Wallwasher Series
P.22-25

Polaris Track
P.112







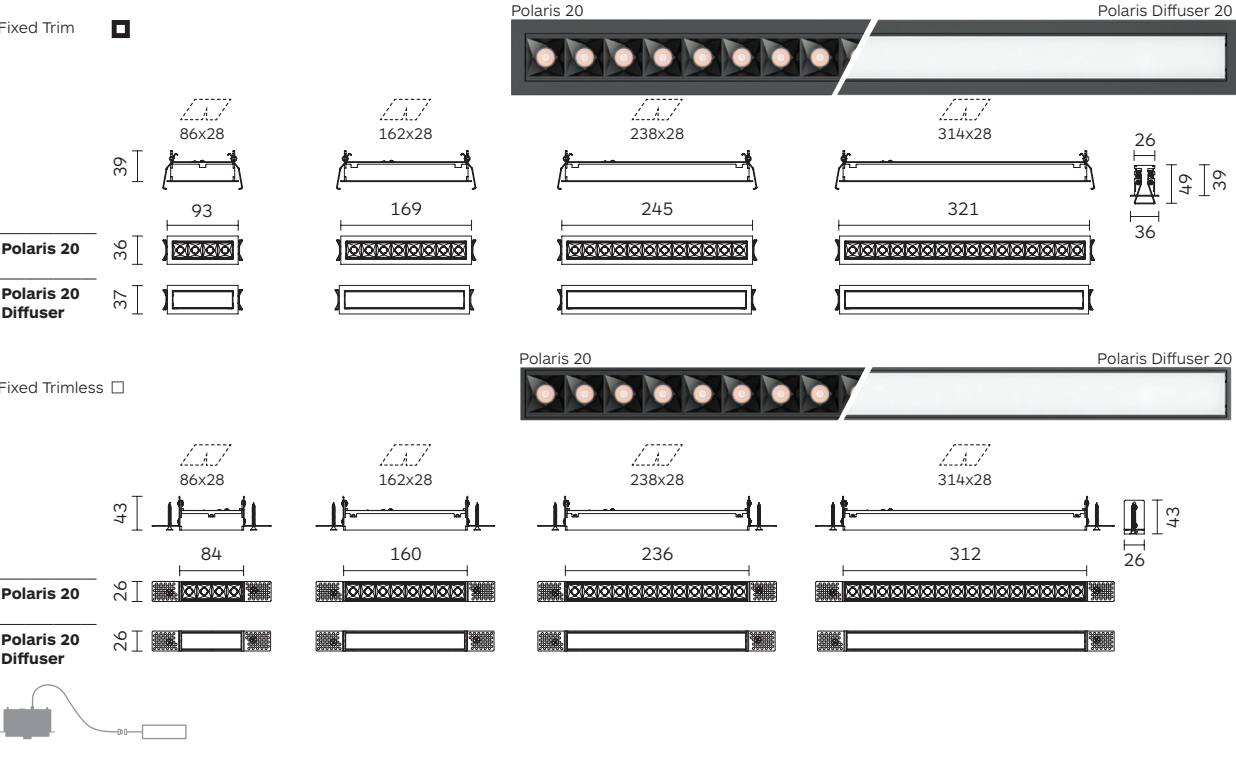



















Polaris Surface
P.134

Polaris Pendant
P.160

Polaris 20 & Polaris 20 Diffuser



Code ordering example: **R O 9 5 B O 1 1 - 9 0 3 0 2 1 D 0 0 1**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Polaris 20 Fixed 4 LEDs	RO95  x4 RO96 	BO11 High Power LED	90	30 3000K 40 4000K TW 2700K-5700K	4x1W	520 lm 600 lm	21 / 30 / 45 / 60	D0 No Dim DA Dali Dim DP Phase Dim	01  W/B 10  Black 65  Matt Black
Polaris 20 Fixed 8 LEDs	RO97  x8 RO98 				8x1W	1040 lm 1200 lm		DC CASAMBI D1 0-10V Dim	11  White 54  Matt White 17  B/W
Polaris 20 Fixed 12 LEDs	RO99  x12 RP01 				12x1W	1560 lm 1800 lm			
Polaris 20 Fixed 16 LEDs	RP02  x16 RP03 				16x1W	2080 lm 2400 lm			
Polaris 20 Diffuser Fixed L: 93	RQ88  RQ89 	BT21 High Power LED	97	30 3000K 40 4000K	1.5W	189 lm 200 lm	OD Opal Diffuser		10  Black 65  Matt Black 11  White 54  Matt White
Polaris 20 Diffuser Fixed L: 169	RQ90  RQ91 				3W	378 lm 400 lm			
Polaris 20 Diffuser Fixed L: 245	RQ92  RQ93 				5W	567 lm 600 lm			
Polaris 20 Diffuser Fixed L: 321	RQ94  RQ95 				7W	945 lm 1000 lm			


Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
01: Black light body with white integrated louvre. **17:** White light body with black integrated louvre.
For the most updated product information, please go to our website.

Polaris 30 Fixed





Polaris 30

Fixed Trim ☒

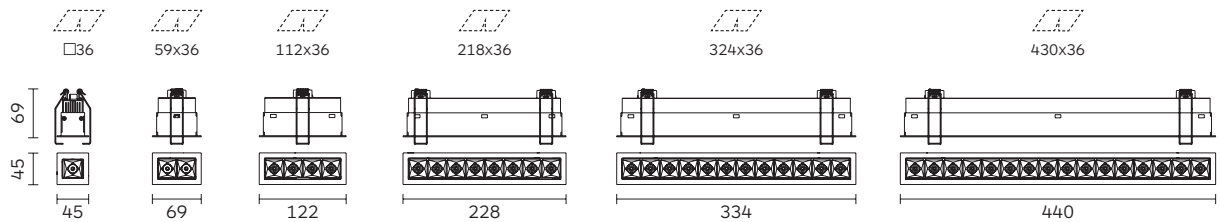

Polaris 30

Fixed Trimless ☐

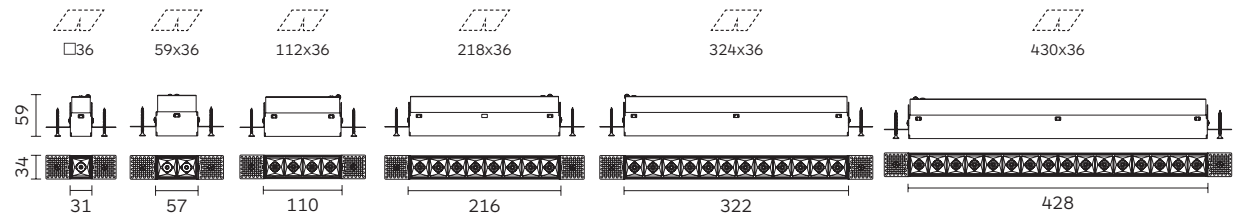

Code ordering example: **R J 3 4 B O 1 1 - 9 0 3 0 3 4 D 0 0 1**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Polaris 30 Fixed 1 LED	RJ34 <input checked="" type="checkbox"/> x1	BO11 High Power LED	90	30 3000K	2W	190 lm	34 / 50	D0 No Dim	01 <input checked="" type="checkbox"/> W/B
	RJ35 <input type="checkbox"/>			40 4000K		240 lm		DA Dali Dim	10 <input checked="" type="checkbox"/> Black
Polaris 30 Fixed 2 LEDs	RL83 <input checked="" type="checkbox"/> x2				2x2W	380 lm		DP Phase Dim	65 <input checked="" type="checkbox"/> Matt Black
	RL79 <input type="checkbox"/>					480 lm		DC CASAMBI	11 <input type="checkbox"/> White
Polaris 30 Fixed 4 LEDs	RJ36 <input checked="" type="checkbox"/> x4				4x2W	760 lm		D1 0-10V Dim	54 <input type="checkbox"/> Matt White
	RJ37 <input type="checkbox"/>					960 lm			17 <input checked="" type="checkbox"/> B/W
Polaris 30 Fixed 8 LEDs	RJ38 <input checked="" type="checkbox"/> x8				8x2W	1520 lm			
	RJ39 <input type="checkbox"/>					1920 lm			
Polaris 30 Fixed 12 LEDs	RJ40 <input checked="" type="checkbox"/> x12				12x2W	2280 lm			
	RJ41 <input type="checkbox"/>					2880 lm			
Polaris 30 Fixed 16 LEDs	RJ42 <input checked="" type="checkbox"/> x16				16x2W	3040 lm			
	RJ43 <input type="checkbox"/>					3840 lm			

Notes:

* For complete code ordering information, please see pages 214-215.

** For other CCT options, please contact us.

01: Black light body with white integrated louvre. **17:** White light body with black integrated louvre.


For the most updated product information, please go to our website.

Polaris 30 Adjustable





Polaris 30

Adjustable Trim ☒

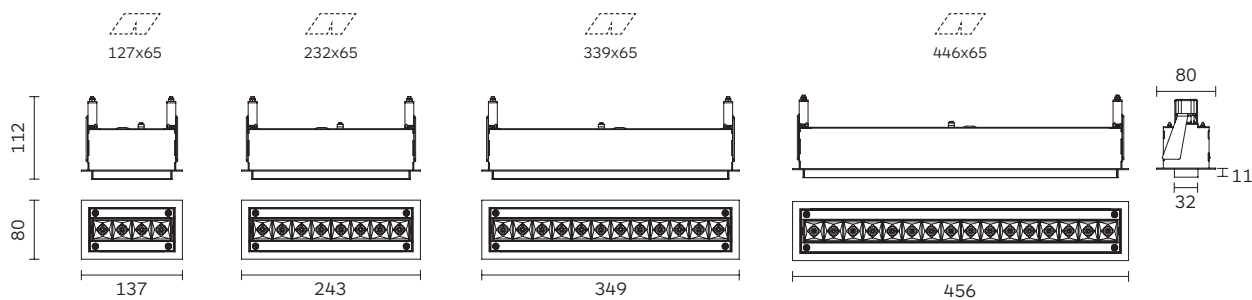

Polaris 30

Adjustable Trimless ☐

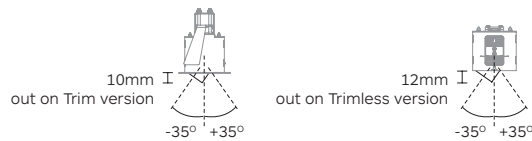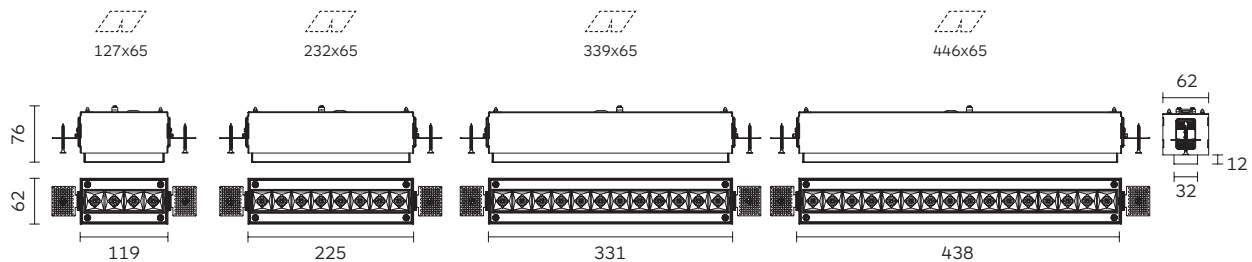

Code ordering example: **R L 7 1 B O 1 1 - 9 0 3 0 3 4 D 0 0 1**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Polaris 30 Adjustable 4 LEDs	RL71 <input checked="" type="checkbox"/> x4	BO11 High Power LED	90	30 3000K	4x2W	760 lm	34 / 50	D0 No Dim	01 <input checked="" type="checkbox"/> W/B
	RL72 <input type="checkbox"/>			40 4000K		960 lm		DA Dali Dim	10 <input checked="" type="checkbox"/> Black
Polaris 30 Adjustable 8 LEDs	RL73 <input checked="" type="checkbox"/> x8				8x2W	1520 lm		DP Phase Dim	65 <input checked="" type="checkbox"/> Matt Black
	RL74 <input type="checkbox"/>					1920 lm		DC CASAMBI	11 <input type="checkbox"/> White
Polaris 30 Adjustable 12 LEDs	RL75 <input checked="" type="checkbox"/> x12				12x2W	2280 lm		D1 0-10V Dim	54 <input type="checkbox"/> Matt White
	RL76 <input type="checkbox"/>					2880 lm			17 <input checked="" type="checkbox"/> B/W
Polaris 30 Adjustable 16 LEDs	RL77 <input checked="" type="checkbox"/> x16				16x2W	3040 lm			
	RL78 <input type="checkbox"/>					3840 lm			

Notes:








* For complete code ordering information, please see pages 214-215.

** For other CCT options, please contact us.





01: Black light body with white integrated louvre. **17:** White light body with black integrated louvre.

For the most updated product information, please go to our website.

Polaris 65 Fixed



Code ordering example: **R J 4 4 B C 2 2 - 9 0 3 0 3 0 D 0 0 1**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Polaris 65 Fixed 1 LED	RJ44 <input checked="" type="checkbox"/> x1	BC22 COB LED	90	30 3000K	12W	1550 lm	30 / 53	D0 No Dim	01  W/B
	RJ45 <input type="checkbox"/>			40 4000K		1735 lm		DA Dali Dim	10  Black
Polaris 65 Fixed 2 LEDs	RJ46 <input checked="" type="checkbox"/> x2				2x12W	3100 lm		DP Phase Dim	65  Matt Black
	RJ47 <input type="checkbox"/>					3470 lm		DC CASAMBI	11 <input type="checkbox"/> White
Polaris 65 Fixed 3 LEDs	RJ48 <input checked="" type="checkbox"/> x3				3x12W	4650 lm		D1 0-10V Dim	54 <input type="checkbox"/> Matt White
	RJ49 <input type="checkbox"/>					5205 lm			17  B/W

Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
01: Black light body with white integrated louvre. **17:** White light body with black integrated louvre.
For the most updated product information, please go to our website.



Polaris 30 Fixed



Polaris 30 Adjustable

Polaris Wallwasher

Designed by Franco Mirenzi (Registered)



Body

A rectangular-shaped mounting trim in cast aluminum with springs for trim installation on ceiling thickness 2-25mm or brackets for trimless installation on ceiling thickness 2-25mm.

Luminaire body in cast aluminum with integrated louvre in extruded aluminum, which directs the light to the upper edge of the wall.

Available in various light head configurations of 3, 6, 9 and 12 LEDs as standard.

Accessories

N/A

Finish

Powder coat in black (10), Embossed matt black (65), white (11), or Embossed matt white (54) colour.

LED sources

Light source options: High Power LED.
CRI: 90 | CCT: 3000K, 4000K.
Other CRI, CCT and Tuneable White options available on request.

Optic

Lens.
Beam Angle: Wallwasher.

Driver

Supplied with non-dimmable remote driver.
Dimming Options: 0-10V Dim, DALI, Phase, CASAMBI.
220-240V 50/60Hz.

Applications

A high performance linear wallwasher with compact dimensions offering a space-saving solution. Its special lens optics enables a wide spread, uniform wallwashing effect. Application areas: galleries, museums, commercial, hotels.

Related Products

Polaris Recessed Series
P.16-21

Polaris Track
P.112

Polaris Surface
P.134


Polaris Pendant
P.160

Polaris 20 Wallwasher





Polaris 20

Wallwasher ☒
Trim ☐

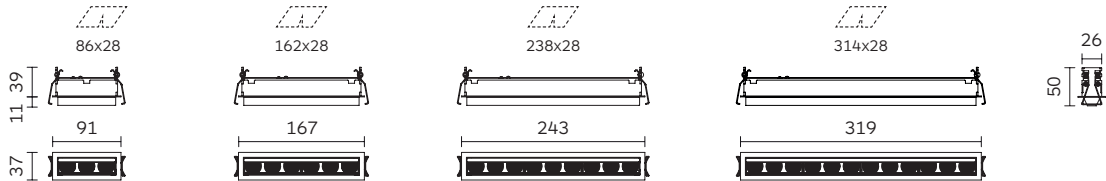

Polaris 20

Wallwasher ☐
Trimless ☒

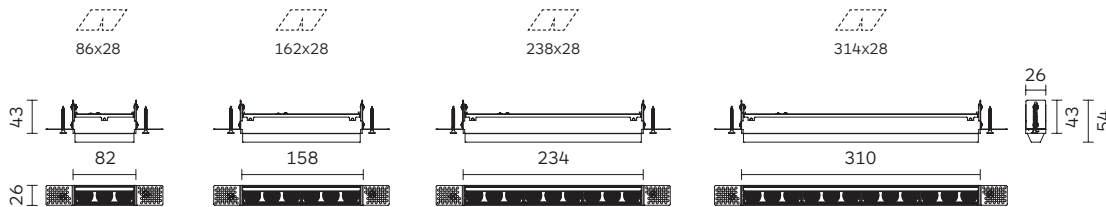

Code ordering example: **R P 4 0 B N 1 1 - 9 0 3 0 W W D 0 1 0**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Polaris 20 Wallwasher 3 LEDs	RP40 <input checked="" type="checkbox"/> x3	BN11 High Power LED	90	30 3000K	3x1.4W	525 lm	WW	D0 No Dim	10 <input checked="" type="checkbox"/> Black
	RP41 <input type="checkbox"/>			40 4000K		585 lm		DA Dali Dim	65 <input checked="" type="checkbox"/> Matt Black
Polaris 20 Wallwasher 6 LEDs	RP42 <input checked="" type="checkbox"/> x6				6x1.4W	1050 lm		DP Phase Dim	11 <input type="checkbox"/> White
	RP43 <input type="checkbox"/>					1170 lm		DC CASAMBI	54 <input type="checkbox"/> Matt White
Polaris 20 Wallwasher 9 LEDs	RP44 <input checked="" type="checkbox"/> x9				9x1.4W	1575 lm		D1 0-10V Dim	
	RP45 <input type="checkbox"/>					1755 lm			
Polaris 20 Wallwasher 12 LEDs	RP46 <input checked="" type="checkbox"/> x12				12x1.4W	2100 lm			
	RP47 <input type="checkbox"/>					2340 lm			

Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
WW = Wallwasher
For the most updated product information, please go to our website.

Polaris Wallwasher

Designed by Franco Mirenzi (Registered)



Body

A rectangular-shaped mounting trim in cast aluminum with springs for trim installation on ceiling thickness 2-25mm or brackets for trimless installation on ceiling thickness 2-25mm.

Luminaire body in cast aluminum with integrated satin opal diffuser, which directs the light to the upper edge of the wall.

Available in three different lengths.

Accessories

N/A

Finish

Powder coat in black (10), Embossed matt black (65), white (11), or Embossed matt white (54).

LED sources

Light source options: High Power LED.
CRI: 90 | CCT: 3000K, 4000K.
Other CRI, CCT and Tuneable White options available on request.

Optic

Satin Opal Diffuser.
Beam Angle: Wallwasher.

Driver

Supplied with non-dimmable remote driver.
Dimming Options: 0-10V Dim, DALI, Phase, CASAMBI.
220-240V 50/60Hz.

Applications

High performance, linear, wallwasher layered with special lenses and satin opal diffuser enables a wide spread, uniform wallwashing effect.
Application areas: galleries, museums, commercial, hotels.

Related Products

Polaris Recessed Series

P.16-21

Polaris Track

P.112

Polaris Surface

P.134

Polaris Pendant

P.160

Polaris 30 Wallwasher



Polaris 30

Wallwasher 1 Trim

140x36

Polaris 30


Wallwasher 2 Trim

273x36

Polaris 30

Wallwasher 3 Trim

406x36

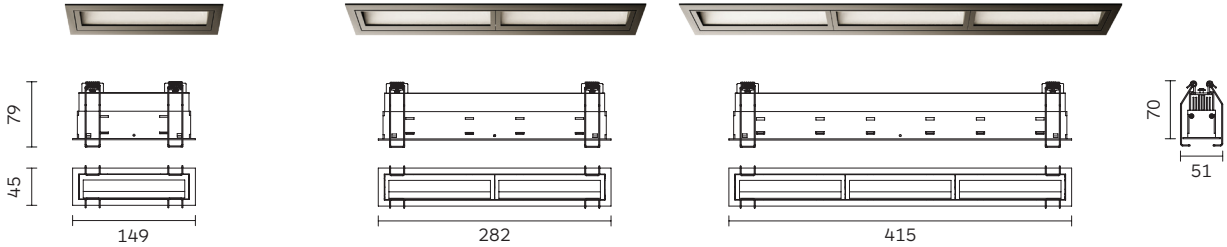

Polaris 30

Wallwasher 1 Trimless

140x36

Polaris 30



Wallwasher 2 Trimless

273x36

Polaris 30

Wallwasher 3 Trimless

406x36

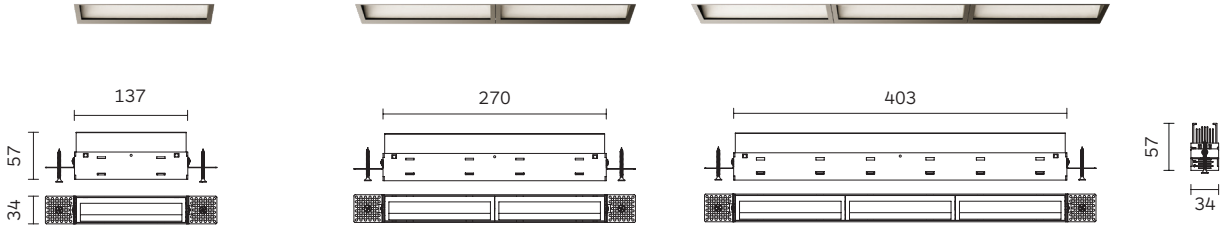


Code ordering example: **R P 5 6 B E 1 1 - 9 0 3 0 W W D 0 1 0**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Polaris 30 Wallwasher 1	RP56	BE11 High Power LED	90	30 3000K	6W	780 lm	WW	D0 No Dim	10 Black
	RP57			40 4000K		820 lm		DA Dali Dim	65 Matt Black
Polaris 30 Wallwasher 2	RP58				12W	1560 lm		DP Phase Dim	11 White
	RP59					1630 lm		DC CASAMBI	54 Matt White
Polaris 30 Wallwasher 3	RP60				18W	2340 lm		D1 0-10V Dim	
	RP61					2450 lm			

Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
WW = Wallwasher
For the most updated product information, please go to our website.

Inteso

Adjustable Recessed

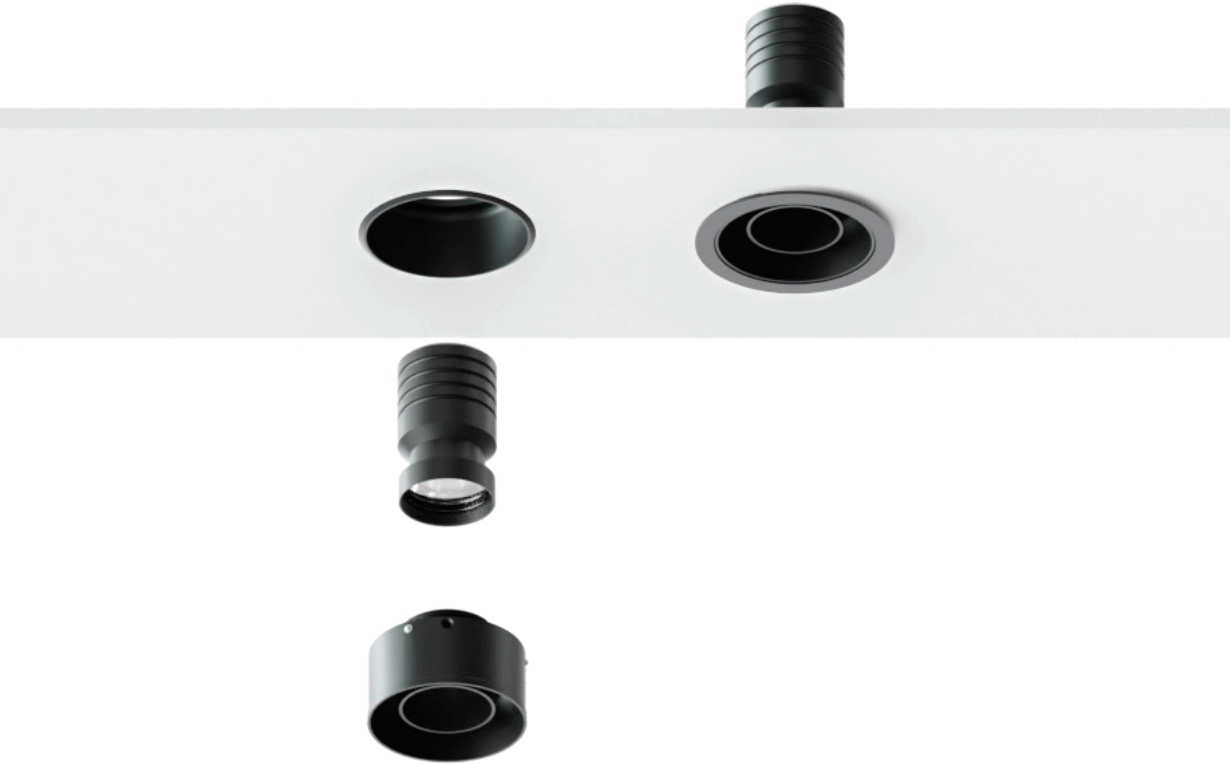

Body

A modular, high-performance, recessed downlight with a deep regressed, almost invisible LED light source, delivering high luminosity and optimum glare control. Its recessed cylindrical light body and circular ceiling trim are made in cast aluminum.

Available in trim and trimless versions.

Adjustable with a 0°-30° tilt.

Designed with respect for the circular economy, with its modularity, low maintenance and easy installation.

Accessories

N/A

Finish

Powder coat in black (10), Embossed matt black (65), white (11), or Embossed matt white (54).

LED sources

Light source options: High Power LED, COB LED. CRI: 90 | CCT: 3000K, 4000K. Other CRI and CCT options available on request.

Optic

Lens. Beam Angle: Narrow / Wide.

Driver

Supplied with a Non-dimmable remote driver. Dimming Options: 0-10V Dim, DALI, Phase, CASAMBI. 220-240V 50/60Hz.

Applications

Its concealed light source for high visual comfort ensures this luminaire blends seamlessly into its architectural environment. With the added flexibility of light aiming. Application areas: Corridors, retail, showrooms, residential, restaurants, hotels.

Related Products

Colosseo Round Recessed

P.28


Colosseo Square Recessed

P.30

Spotify Recessed Series

P.50-57

Inteso Adjustable

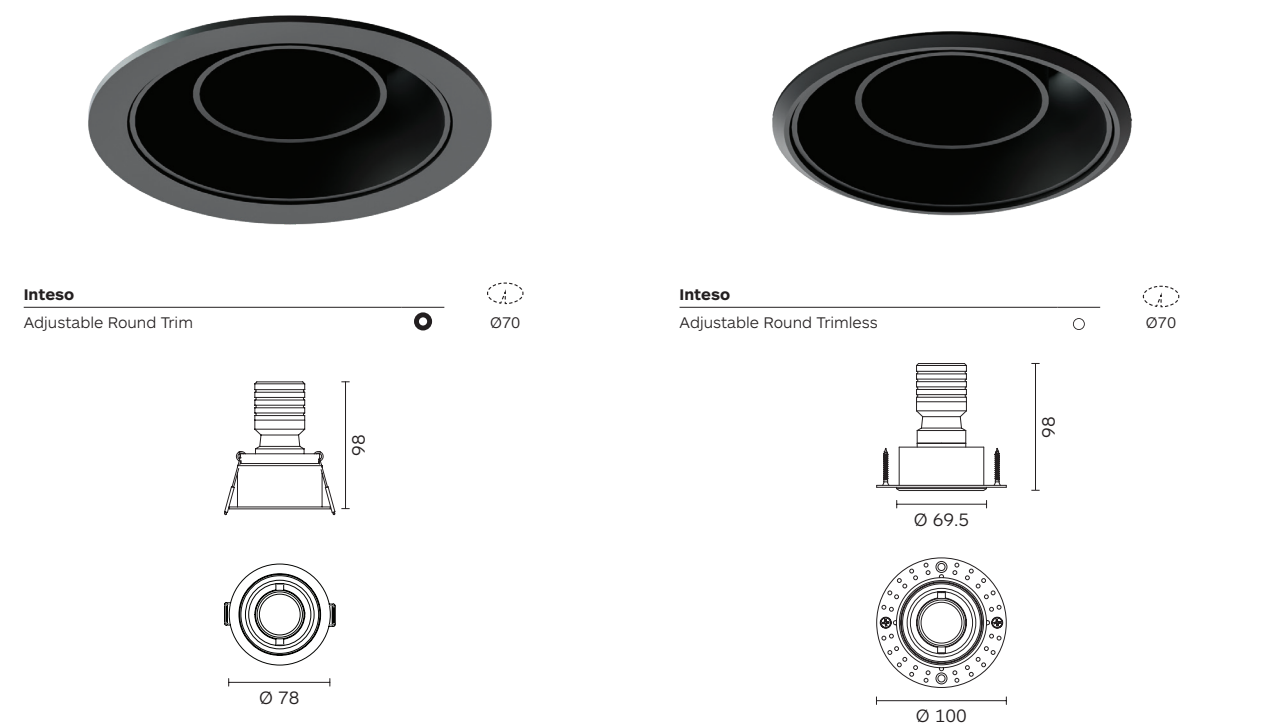

Code ordering example: **R Q 3 9 M R 2 1 - 9 0 3 0 0 9 D 0 1 0**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Inteso Round Adjustable	RQ39	MR21 High Power LED	90	30 3000K	8W	711 lm	09 / 22	D0 No Dim	10 Black
	RQ40			40 4000K		790 lm		DA Dali Dim	65 Matt Black
		MN21 COB LED			10W	1227 lm	18 / 21 / 25	DP Phase Dim	11 White
						1314 lm		DC CASAMBI	54 Matt White
								D1 0-10V Dim	

Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For the most updated product information, please go to our website.

Colosseo

Recessed Round 75 | 90 | 120



Body

Round-shaped mounting trim in cast aluminum with spring for trim installation or brackets for trimless installation on a ceiling thickness 6-15mm.

Luminaire body inclusive of snoot in cast aluminum.

Easy relamping via removable front ring by snap-in catch action.

Available in three sizes with light head diameters of 75mm, 90mm and 120mm.

Tiltable in two directions up to 30°.

Accessories

Coloured filters, honeycomb louvre.
Check page 88 for details.

Finish

Powder coat in black (10), Embossed matt black (65), white (11), or Embossed matt white (54).

LED sources

Light source options: High Power LED (Colosseo 75).
COB LED (Colosseo 75, 90, 120) Retrofit (Colosseo 90).
CRI: 90 | CCT: 3000K, 4000K.
Other CRI and CCT options and Tuneable White version available on request.

Optic

Lens.
Beam Angle: Super narrow 7° (Only For Colosseo 75) /
Narrow / Medium / Wide.

Driver

Supplied with non-dimmable remote driver.
Dimming Options: 0-10V Dim, DALI, Phase, CASAMBI.
220-240V 50/60Hz.

Applications

A fully adjustable light head designed to accommodate any recessed lighting application and allow lamp aiming while power is on.
Application areas: retail, shopping centers, corridors, window display.


Related Products

**Colosseo
Square
Recessed**


P.30





Colosseo Round




Colosseo 75
Adjustable Trim





Colosseo 75
Adjustable Trimless




Colosseo 90
Adjustable Trim





Colosseo 90
Adjustable Trimless



Colosseo 120
Adjustable Trim



Colosseo 120
Adjustable Trimless



Code ordering example: **R P 1 9 B R 2 1 - 9 0 3 0 0 7 D 0 1 0**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Colosseo 75 Round Adjustable	RP19 ●	BR21 High Power LED	90	30 3000K	4W	400 lm	07 / 24 / 36	D0 No Dim	10 ■ Black
	RP20 ○			40 4000K		430 lm		DA Dali Dim	65 ■ Matt Black
		MC31 COB LED			6W	660 lm	16 / 26 / 36	DP Phase Dim	11 □ White
						700 lm		DC CASAMBI	54 □ Matt White
Colosseo 90 Round Adjustable	RO32 ●	MC31 COB LED			11W	1088 lm	11 / 24 / 32	D1 0-10V Dim	
	RO44 ○					1183 lm			
		GU53 Retrofit MR16-GU5.3	00	00	/	/	00	00 No Driver	
Colosseo 120 Round Adjustable		GU10 GU10-GZ10							
	RO33 ●	MC32 COB LED	90	30 3000K	21W	2373 lm	12 / 18 / 32	D0 No Dim	
	RO23 ○			40 4000K		2637 lm		DA Dali Dim	
								DP Phase Dim	
								DC CASAMBI	
								D1 0-10V Dim	

Notes:

* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For related accessories, please see pages 88-89.
For the most updated product information, please go to our website.

Colosseo

Recessed Square 90



Body

A square or rectangular-shaped mounting trim in cast aluminum with spring for trim installation or brackets for trimless installation on a ceiling thickness 6-15mm.

Luminaire body inclusive of snoot in cast aluminum.

Easy relamping via removable front ring by snap-in catch action.

Available in a configuration of 1, 2 or 3 LED light heads, extending the trim size and shape from square to rectangular. Tilttable in two directions up to 25°.

Accessories

Coloured filters, honeycomb louvre.
Check page 88 for details.

Finish

Powder coat in black (10), Embossed matt black (65), white (11), or Embossed matt white (54).

LED sources

Light source options: COB LED, Retrofit.
CRI: 90 | CCT: 3000K, 4000K.
Other CRI and CCT options and Tuneable White version available on request.

Optic

Lens.
Beam Angle: Narrow / Medium / Wide.

Driver

Supplied with non-dimmable remote driver.
Dimming Options: 0-10V Dim, DALI, Phase, CASAMBI.
220-240V 50/60Hz.

Applications

A fully adjustable light head designed to accommodate any recessed lighting application and allow lamp aiming while power is on.
Application areas: retail, shopping centers, corridors, window display.

Related Products

Colosseo
Round
Recessed




P.28


Colosseo Square




Colosseo 90
Adjustable Trim 1 light head




Colosseo 90
Adjustable Trimless 1 light head




Colosseo 90
Adjustable Trim 2 light heads






Colosseo 90
Adjustable Trimless 2 light heads













Colosseo 90
Adjustable Trim 3 light heads



Colosseo 90
Adjustable Trimless 3 light heads




Code ordering example: **R P 6 5 M C 3 1 - 9 0 3 0 1 1 D 0 1 0**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Colosseo 90 Square Adjustable 1 light head	RP65  x1 RO75 	MC31 COB LED	90	30 3000K 40 4000K	11W	1088 lm	11 / 24 / 32	D0 No Dim DA Dali Dim DP Phase Dim DC CASAMBI D1 0-10V Dim	10  Black 65  Matt Black 11  White 54  Matt White
Colosseo 90 Square Adjustable 2 light heads	RP66  x2 RP68 				2x11W	2176 lm 2366 lm			
Colosseo 90 Square Adjustable 3 light heads	RP67  x3 RP69 				3x11W	3264 lm 3549 lm			
	GU53	Retrofit MR16-GU5.3	00	00	/	/	00	00 No Driver	
	GU10	GU10-GZ10							

Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For related accessories, please see pages 88-89.
For the most updated product information, please go to our website.

Solo S

Adjustable Recessed Round & Square

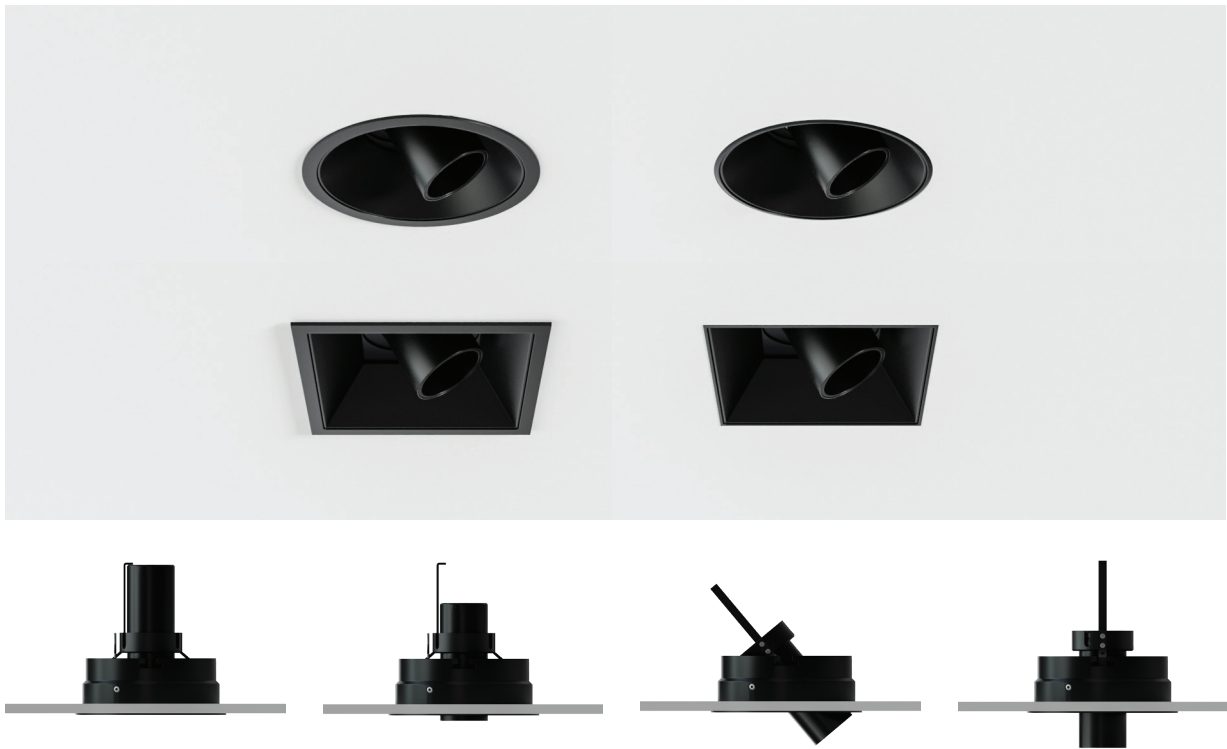

Body

Round-shaped recessed spotlight, body in cast aluminum and with spring for installation on ceiling thickness 1-25mm. Available in trim and trimless version.

The unique pull-down mechanism enables Solo to function as either a downlight, a regressed accent light with great cut-off, or an exposed lamp head able to emulate a surface or track fixture.

Fully adjustable light head is tiltable up to 40° and rotatable horizontally 355°.

Accessories

N/A

Finish

Powder coat in black (10), Embossed matt black (65), white (11), or Embossed matt white (54).

LED sources

Light source options: COB LED.
CRI: 90 | CCT: 3000K, 4000K.
Other CRI, CCT and Tuneable White options are available on request.

Optic

Lens.
Beam Angle: Narrow / Medium.


Driver

Supplied with Non-dimmable remote driver.
Dimming Options: 0-10V Dim, DALI, Phase, CASAMBI.
220-240V 50/60Hz.

Applications

An extended family to the popular Solo series, Solo S inherits all the features in more compact size.
Application areas: retail, museums, showrooms, window displays.


Related Products




Solo S




Solo S
Adjustable Round Trim Ø105





Solo S
Adjustable Round Trimless Ø105




Solo S
Adjustable Square Trim 105x105



Solo S
Adjustable Square Trimless 105 x 105

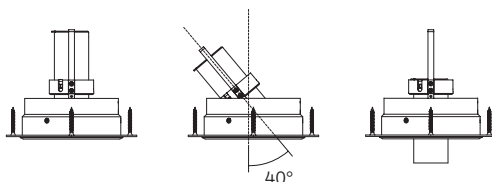

recessed position 40° tilting angle drop position



Code ordering example: **R Q 8 5 M C 3 6 - 9 0 3 0 1 8 D 0 1 0**


	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Solo S Round Adjustable	RQ85	MN21 COB LED	90	30 3000K	11W	1287 lm	18 / 25	D0 No Dim	10 Black
	RQ86			40 4000K		1349 lm		DA Dali Dim	65 Matt Black
Solo S Square Adjustable	RR02							DP Phase Dim	11 White
	RR03							DC CASAMBI	54 Matt White
								D1 0-10V Dim	

Notes:

* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For the most updated product information, please go to our website.

Solo

Adjustable Recessed Round & Square

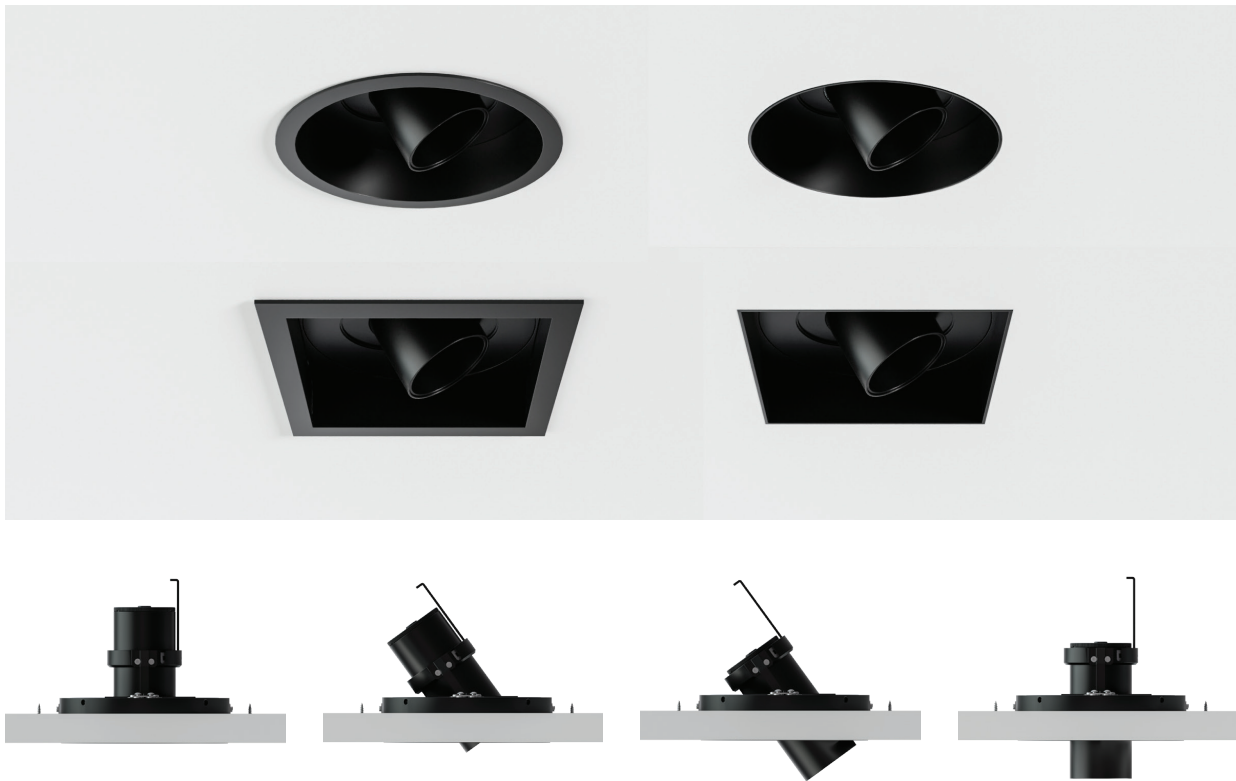

Body

Round or square-shaped mounting trimless in cast aluminum with spring for installation on ceiling thickness 1-25mm.

Luminaire body in cast aluminum and thermoplastic materials. The fully adjustable light head is tiltable up to 45° and rotatable horizontally 360°.

LED sources

Light source options: COB LED.
CRI: 90 | CCT: 3000K, 4000K.
Other CRI, CCT and Tuneable White options are available on request.

Optic

Lens.
Beam Angle: Narrow / Medium / Wide.

Accessories

Coloured filters, honeycomb louvre.
Check page 88 for details.

Finish

Powder coat in black (10), Embossed matt black (65), white (11), or Embossed matt white (54).

Driver

Supplied with Non-dimmable remote driver.
Dimming Options: 0-10V Dim, DALI, Phase, CASAMBI.
220-240V 50/60Hz.

Applications

The unique pull-down mechanism enables SOLO to function as either a downlight, a regressed accent light with great cut-off, or an exposed lamp head able to emulate a surface or track fixture.
Application areas: retail, museums, showrooms, window displays.







Related Products

Solo S Recessed
P.32

Zero In & Out Recessed
P.36

Iride Recessed
P.38

Solo Adjustable

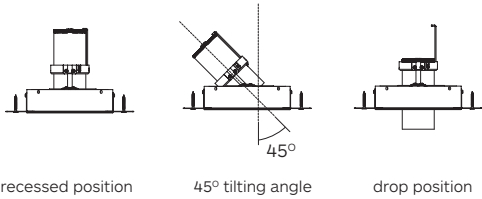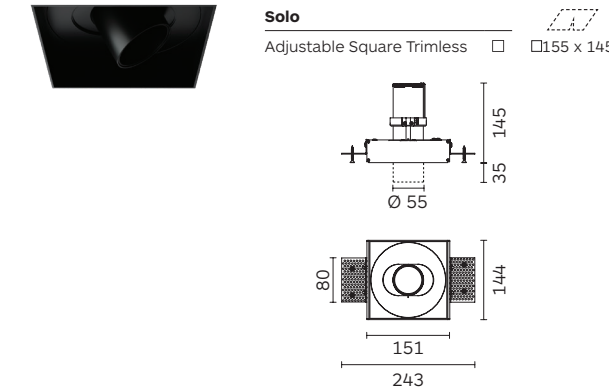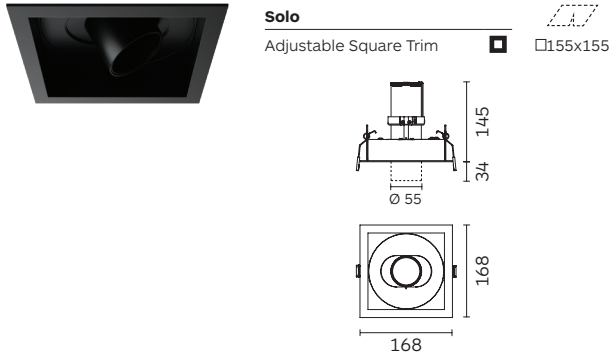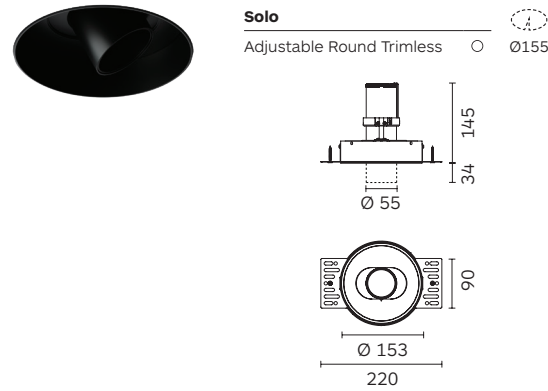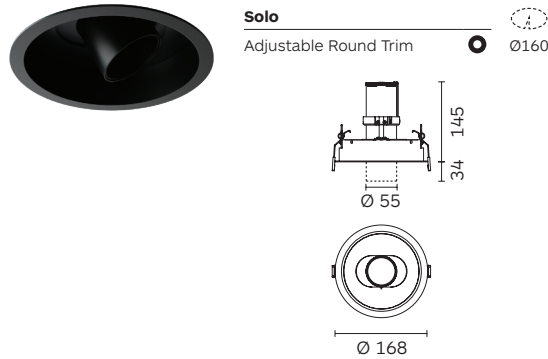


Code ordering example: **R Q 9 8 M N 2 1 - 9 0 3 0 1 1 D 0 1 0**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Solo Round Adjustable	RQ98 ● MN21	COB LED	90	30 3000K	14W	1637 lm	11 / 16 / 32	D0 No Dim	10 ■ Black
	RQ87 ○			40 4000K		1748 lm		DA Dali Dim	65 ■ Matt Black
Solo Square Adjustable	RQ99 ■							DP Phase Dim	11 □ White
	RQ77 □							DC CASAMBI	54 □ Matt White
								D1 0-10V Dim	

Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For related accessories, please see pages 88-89.
For the most updated product information, please go to our website.

Zero In & Out

Recessed Round 40 | 66

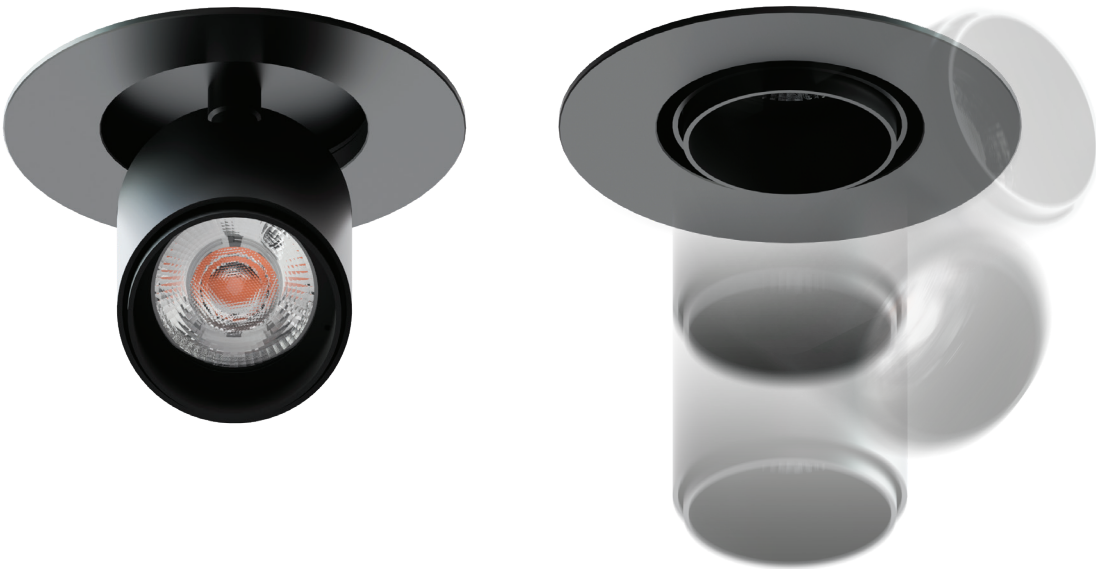

Body

Recessed luminaire with round mounting trim in cast aluminum with springs for trim installation on a ceiling thickness of 1-25mm.

Luminaire body and retractable light head in cast aluminum.

Available in two light head diameter sizes - 40mm and 66mm.

The fully retractable light head is tiltable up to 90° and rotatable horizontally 355°.

Accessories

Coloured filters, honeycomb louvre. Check page 88 for details.

Finish

Powder coat in black (10), Embossed matt black (65), white (11), or Embossed matt white (54).

LED sources

Light source options: High Power LED, COB LED, COB Tuneable White.
CRI: 90 | CCT: 3000K, 4000K, TW.
Other CRI and CCT options available on request.

Optic

Lens.
Beam Angle: Narrow / Medium / Wide.

Driver

Supplied with non-dimmable remote driver.
Dimming Options: 0-10V, DALI, CASAMBI.
220-240V 50/60Hz.

Applications

The unique pull-down mechanism of this scaled-down cylindrical light head - from a concealed, recessed ceiling light to an exposed, surface downlight - offers maximum multidirectional aiming flexibility in a seamless design.
Application areas: retail, hotels, museums, window displays.

Related Products

Zero Semi-Recessed
P.12

Zero Track Series
P.92-98

Zero Projector Track
P.100-103

Zero Due Surface
P.136



Zero Projector Surface
P.138-141

Zero Pendant
P.158


Zero In & Out



Zero In & Out 40
Adjustable Trim

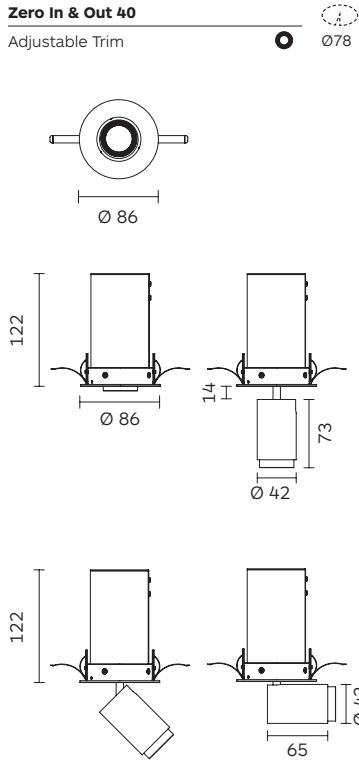

Zero In & Out 66
Adjustable Trim

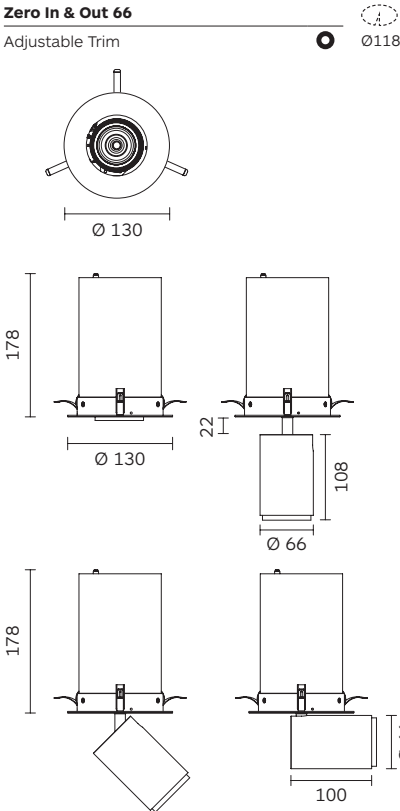

Code ordering example: **R O 4 2 B C 3 1 - 9 0 3 0 1 6 D 0 1 0**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Zero In & Out 40 Adjustable	RO42	BC31 COB LED	90	30 3000K	6W	705 lm	16 / 26 / 36	D0 No Dim	10 Black
				40 4000K		770 lm		DA Dali Dim	65 Matt Black
		BR21 High Power LED			4W	439 lm	07	DC CASAMBI	11 White
						483 lm		D1 0-10V Dim	54 Matt White
Zero In & Out 66 Adjustable	RO43	BU11 TW COB LED		TW 2700K-6500K	7W	710 lm	18 / 28 / 40		
		BC31 COB LED	30	30 3000K	11W	1160 lm		11 / 16 / 32	
				40 4000K		1258 lm			
		BR21 High Power LED			6W	574 lm	05		
		IU21 TW COB LED		TW 2700K-6500K	13W	1290 lm	16 / 25 / 48		

Notes:

* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For related accessories, please see pages 88-89.
For the most updated product information, please go to our website.

Iride

Designed by Walter Amort (Registered)



Body

Round-shaped mounting trim in cast aluminum with springs for trim installation on a ceiling thickness of 1-25mm.

Luminaire body in cast aluminum and thermoplastic materials.

Easy relamping via removable front ring with twist-lock action for retrofit version.

The fully retractable lighthouse is tiltable with up to 35° and rotatable horizontally 350°.

Accessories

Coloured filters, linear spread, honeycomb louvre. Check page 89 for details.

Finish

Powder coat in black (10), Embossed matt black (65), white (11), or Embossed matt white (54).

LED sources

Light source options: COB LED. Retrofit.

CRI: 90 | CCT: 3000K, 4000K.

Other CRI, CCT and Tuneable White options available on request.

Optic

Lens.

Beam Angle: Narrow / Medium / Wide.

Driver

Supplied with non-dimmable remote driver.

Dimming Options: 0-10V Dim, DALI, Phase, CASAMBI.

220-240V 50/60Hz.

Applications

The unique pull-down mechanism enables it to function as either a downlight, a regressed accent light with great cut-off, or a exposed lamp head able to emulate a surface or track fixture.

Application areas: retail, museums, showrooms, window displays.

Related Products



Solo Recessed

P.34






Zero In & Out Recessed

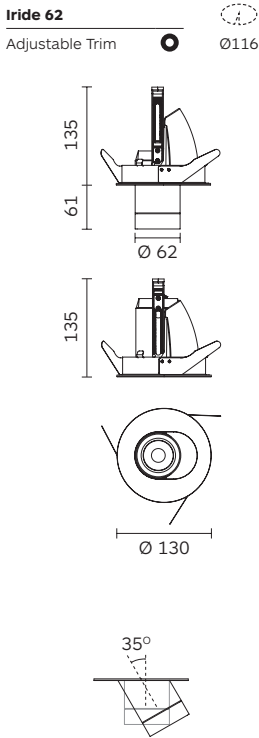P.36

Iride



Code ordering example: **R O 5 8 M C 2 2 - 9 0 3 0 1 8 D 0 1 0**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Iride 62 Adjustable	R058  MC22	COB LED	90	30 3000K	10W	1220 lm	18 / 24 / 36	D0 No Dim	10  Black
				40 4000K		1260 lm		DA Dali Dim	65  Matt Black
								DP Phase Dim	11  White
								DC CASAMBI	54  Matt White
								D1 0-10V Dim	
								00 No Driver	
	GU53	Retrofit		MR16-GU5.3	00	00	/	/	00
	GU10			GU10-GZ10					

Notes:

* For complete code ordering information, please see pages 214-215.

** For other CCT options, please contact us.

For related accessories, please see pages 88-89.

For the most updated product information, please go to our website.

Multi Zero

Adjustable Recessed



Body

Recessed rectangular-shaped housing with trim or trimless installation options on ceiling thickness 1-25mm, with twist and lock mechanism for three Zero spot lights of 40mm diameter.

Each of the three Zero light bodies and arms made in cast aluminum.

Each light head is tiltable up to 90° and rotatable horizontally 355°.

Accessories

Coloured filters, linear spread, honeycomb louvre. Check page 41 for details.

Finish

Powder coat in black (10), Embossed matt black (65), white (11), or Embossed matt white (54).

LED sources

COB LED, High Power LED.
CRI: 90 | CCT: 3000K, 4000K.
Other CRI and CCT options available on request.

Optic

Lens.
Beam Angle: Narrow / Medium / Wide.


Driver

Supplied with non-dimmable remote driver.
Dimming Options: 0-10V Dim, DALI, Phase, CASAMBI.
220-240V 50/60Hz.



Applications

Multi Zero Recessed distinguishes itself with the best lighting performance, flexibility and technology. Scaled-down cylindrical light heads offer maximum multidirectional aiming flexibility in a seamless design. Application areas: retail, jewelry display, hotel restaurant, residential.

Related Products



Multi Zero 40

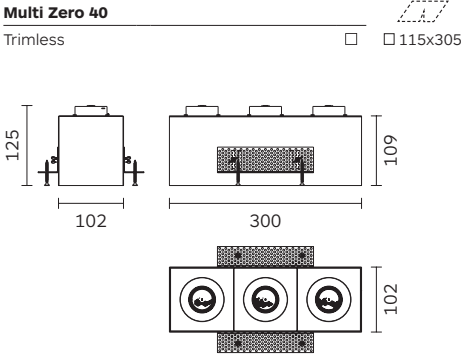

Code ordering example: **R Q 0 8 B C 3 1 - 9 0 3 0 1 6 D 0 1 0**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Multi Zero 40 Adjustable	RQ08 <input type="checkbox"/>	BC31	90	30 3000K	3x6W	3x705 lm	16 / 26 / 36	D0 No Dim	10 <input type="checkbox"/> Black
				40 4000K		3x770 lm		DA Dali Dim	65 <input type="checkbox"/> Matt Black
		BR21 High Power LED			3x4W	3x439 lm	07	DP Phase Dim	11 <input type="checkbox"/> White
						3x483 lm		DC CASAMBI	54 <input type="checkbox"/> Matt White
								D1 0-10V Dim	

Optical Accessories

Product / Optical Accessories	Coloured Filters Colours 25, 42, 55, 85	Linear Spread Colour 41	Honeycomb Louvre Colour 10
Multi Zero 40 Recessed	2E36	2E44	2E35

Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For the most updated product information, please go to our website.

Punto

Recessed Round & Square 76 | 100

Fixed



Adjustable



Body

Round or square-shaped mounting trim in cast aluminum with springs for trim installation on a ceiling thickness of max. 25mm or brackets for trimless installation on a ceiling thickness 12.5-15mm.

Luminaire body in cast aluminum. Easy relamping tool-free via removable lamp front ring by twist and lock action.

Adjustable version tiltable vertically 0°-25° and rotatable horizontally 350°.

Accessories

Coloured filters, linear spread, honeycomb louvre, snoot, anti-glare cone, anti-glare hood. Check page 45 for details.

Finish

Powder coat in black (10), Embossed matt black (65), white (11), or Embossed matt white (54).

LED sources

Light source options: COB LED. Retrofit. CRI: 90 | CCT: 3000K, 4000K. Other CRI and CCT options available on request.

Optic

Lens. Beam Angle: Narrow / Medium / Wide / Wallwasher.


Driver

Supplied with non-dimmable remote driver. Dimming Options: 0-10V Dim, DALI, Phase, CASAMBI. 220-240V 50/60Hz.

Applications

A soft but powerful downlight, pairing form with function and delivering excellent visual comfort. The added flexibility of an adjustable version in either shape, makes this a popular luminaire for many interior applications. Application areas: retail, hotels, restaurants, hospitals, gyms.


Related Products




Punto Fixed




Punto 76
Fixed Round Trim





Punto 76
Fixed Square Trim



Punto 76
Fixed Round Trimless



Punto 76
Fixed Square Trimless



Code ordering example: **R N 2 3 M C 3 1 - 9 0 3 0 1 6 D 0 1 0**


	Product Code	Light Source Code*	>CRI	CCT	LED Power	Nominal Lumen	Beam Angle (00°)	Driver Options	Finish
Punto 76 Fixed Round	RN23	MC31 COB LED	90	30 3000K	6W	710 lm	16 / 26 / 36	D0 No Dim	10 Black
	RN24			40 4000K		770 lm		DA Dali Dim	65 Matt Black
Punto 76 Fixed Square	RN25							DP Phase Dim	11 White
	RN26							DC CASAMBI	54 Matt White
		GU04 Retrofit GU4-MR16	00	00	/	/	00	D1 0-10V Dim	
								00 No Driver	

Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For related accessories, please see page 45.
For the most updated product information, please go to our website.


Punto Adjustable




Punto 100
Adjustable Round Trim






Punto 100
Adjustable Square Trim



Punto 100
Adjustable Round Trimless



Punto 100
Adjustable Square Trimless




Code ordering example: **R P 2 6 M C 2 2 - 9 0 3 0 1 8 D 0 1 0**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Punto 100 Adjustable Round	RP26	MC22 COB LED	90	30 3000K	10W	1276 lm	18 / 24 / 36 / 58	D0 No Dim	10 Black
	RF56			40 4000K		1296 lm		DA Dali Dim	65 Matt Black
Punto 100 Adjustable Square	RP27							DP Phase Dim	11 White
	RF58							DC CASAMBI	54 Matt White
								D1 0-10V Dim	
	GU53	Retrofit MR16-GU5.3	00	00	/	/	00	00 No Driver	
	GU10	GU10-GZ10							

Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For related accessories, please see page 45.
For the most updated product information, please go to our website.

Optical Accessories

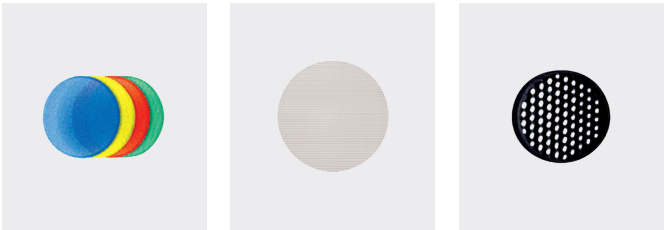

Product / Optical Accessories	Coloured Filters Colours 25, 42, 55, 85	Linear Spread Colour 41	Honeycomb Louvre Colour 10
Punto 100 Adjustable Round & Square	2614*	2615	2504




Product / Optical Accessories	Snoot Colour 17	Snoot Colour 40*	Anti-Glare Cone Colours 10, 65, 17	Anti-Glare Hood Colours 10, 65, 17
Punto 100 Adjustable Round & Square	2F01	2F01	2661	2675

* With holder
* In plastic. Sanded transparent.

Lumi

Recessed 50 | 65

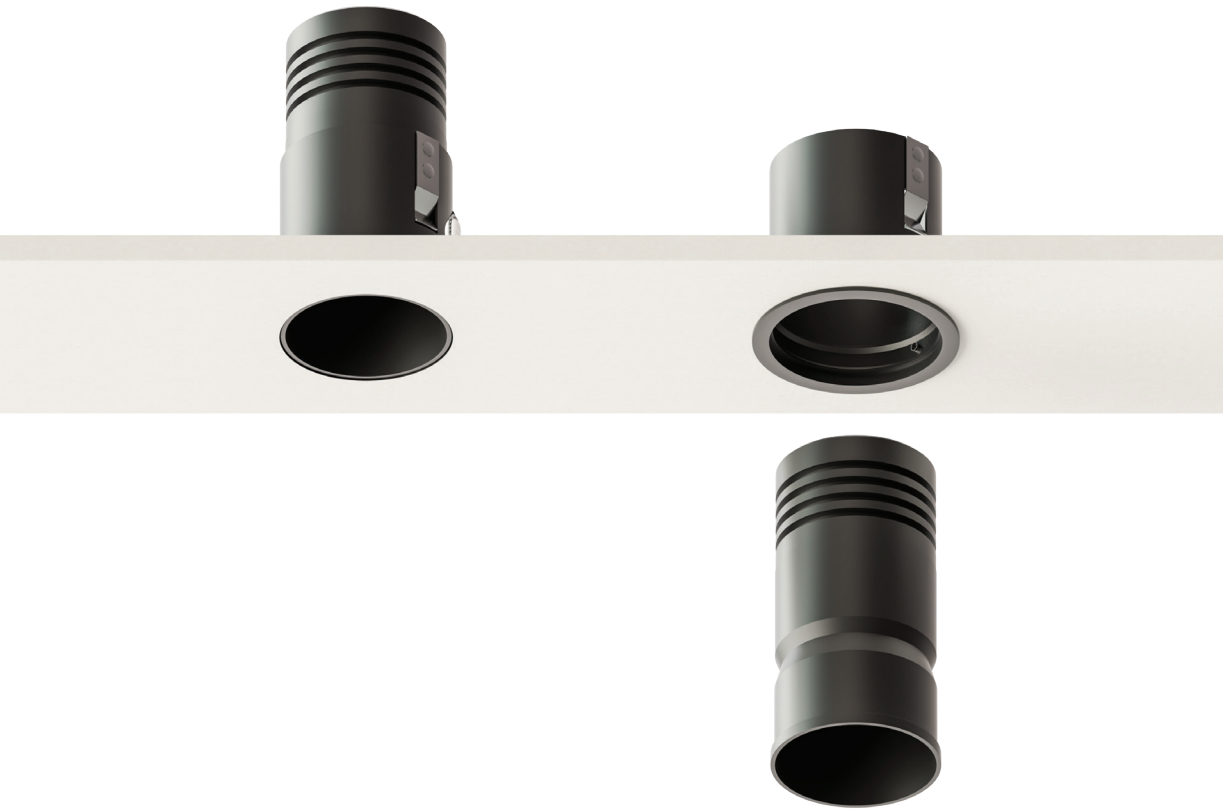

Body

Round-shaped mounting trim in cast aluminum with twist and lock action for trim installation and additional bracket for trimless installation on a ceiling thickness max. 20mm. Lamp body and lock cone in cast aluminum.

Fixing ring can be installed independently.

IP40 luminaire.

Designed with respect for the circular economy - with its modularity, low maintenance and easy installation.

Accessories

Honeycomb louvre.
Check page 88 for details.

Finish

Powder coat in black (10), Embossed matt black (65), white (11), or Embossed matt white (54).

LED sources

Light source options: COB LED.
CRI: 90 | CCT: 3000K, 4000K.
Other CRI and CCT options available on request.

Related Products

Micron

IP54

Recessed

P.66

Optic

Lens.
Beam Angle: Narrow / Medium / Wide.

Driver

Supplied with non-dimmable remote driver.
Dimming Options: 0-10V Dim, DALI, Phase, CASAMBI.
220-240V 50/60Hz.


Applications

A concealed downlight, designed to blend perfectly into the architecture and deliver high performing, glare controlled illumination from its small aperture, in two compact sizes.
Application areas: retail, showrooms, residential, restaurants, hotels.


Lumi Fixed




Lumi 50
Fixed Trim

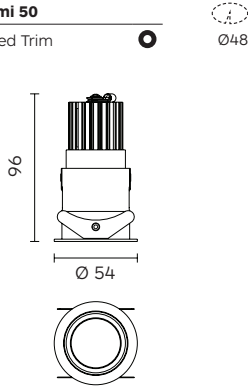



Lumi 50
Fixed Trimless

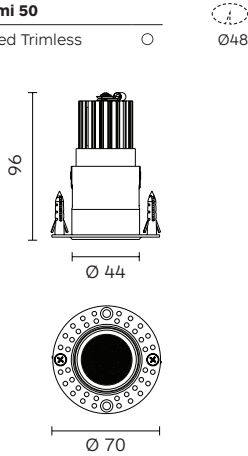



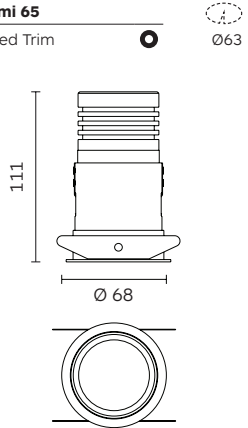



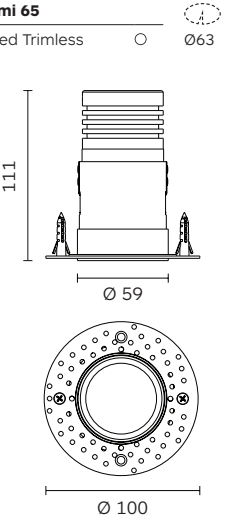

Lumi 65
Fixed Trim



Lumi 65
Fixed Trimless



Code ordering example: **R P 2 9 B C 3 1 - 9 0 3 0 1 6 D 0 1 0**

	Product Code	Light Source Code*		>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Lumi 50	RP29 	BC31	COB LED	90	30 3000K	6W	710 lm	16 / 26 / 36	D0 No Dim	10  Black
Fixed	RP30 				40 4000K		770 lm		DA Dali Dim	65  Matt Black
Lumi 65	RP22 					11W	1160 lm	18 / 24	DP Phase Dim	11  White
Fixed	RP23 						1260 lm		DC CASAMBI	54  Matt White
									D1 0-10V Dim	

Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For related accessories, please see pages 88-89.
For the most updated product information, please go to our website.

Lumi

Recessed 65



Body

The new Lumi Adjustable is a round-shaped, deeply recessed downlight made in cast aluminum. It features an almost invisible regressed LED light source and special optic lens for optimal glare control and uniform light dispersion.

The light head rotates 360° and tilts up to 25°, while remaining inside the ceiling level.

Available in trim and trimless versions.

Designed with respect for the circular economy - with its modularity, low maintenance and easy installation.

Accessories

Honeycomb louvre.
Check page 88 for details.

Finish

Powder coat in black (10), Embossed matt black (65), white (11), or Embossed matt white (54).

LED sources

Light source options: COB LED.
CRI: 90 | CCT: 3000K, 4000K.
Other CRI and CCT options available on request.

Optic

Lens.
Beam Angle: Narrow / Medium / Wide.

Driver

Supplied with a Non-dimmable remote driver.
Dimming Options: 0-10V Dim, DALI, Phase, CASAMBI.
220-240V 50/60Hz.

Applications

A concealed, adjustable downlight, designed to blend perfectly into the architecture and deliver high performing, glare controlled illumination from its small aperture.
Application areas: Corridors, retail, showrooms, residential, restaurants, hotels.

Related Products

Micron

IP54


Recessed

P.66




Lumi Adjustable



Lumi 65
Adjustable Trim Ø75



Lumi 65
Adjustable Trimless Ø75

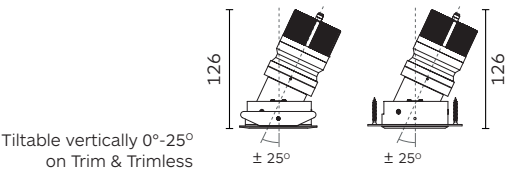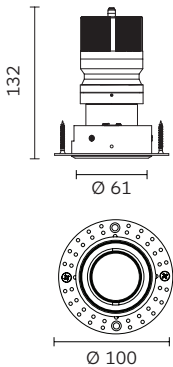

Code ordering example: **RP97 MC31 90 30 11 D0 10**

	Product Code	Light Source Code*		>CRI	CCT**		LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Lumi 65 Adjustable	RP97	MC31	COB LED	90	30	3000K	11W	1088 lm	11 / 24 / 32	D0 No Dim	10 Black
	RP98				40	4000K		1183 lm		DA Dali Dim	65 Matt Black
										DP Phase Dim	11 White
										DC CASAMBI	54 Matt White
										D1 0-10V Dim	

Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For related accessories, please see pages 88-89.
For the most updated product information, please go to our website.

Spotify

Recessed Downlight

Concave Adjustable



Body

The Spotify product family is a series of small recessed downlights, available in round and square shaped light bodies and mounting trims, made in high-grade aluminum and interchangeable optics.

Available in trim and trimless and adjustable versions.

Spotify adjustable versions tilts 0°-35° inside the ceiling level and rotates 355°.

Developed as an ECO design for the circular economy, with its modularity, interchangeable optics and accessories and tool-free mounting.

Accessories

Tool free changeable.
Coloured filters, Honeycomb louvre, Linear Spread, Flat trim, Anti-Glare Cone, Snoot.
Check page 53 for details.

Finish

Powder coat in black (10), Embossed matt black (65), white (11), or Embossed matt white (54) .

LED sources

Light source options:
COB LED. CRI: 90 | CCT: 3000K, 4000K.
COB LED. CRI: 95 | CCT: 3000K, 4000K.
COB LED. CRI: 98 | CCT: 3000K, 4000K.
High Power LED. CRI: 90 | CCT: 3000K, 4000K.
Other CRI and CCT options available on request.

Optic

High grade PMMA Lenses.
Beam Angle: Narrow / Medium / Wide / Wallwasher.

Driver

Remote driver included.
Dimming options: 0-10V, DALI, Phase, CASAMBI.
220-240V 50/60Hz.

Applications

Versatile downlights with high definition optics and advanced LED technology delivering optimal visual comfort.
Application areas: High-end residential and retail projects, hotels, museums and galleries.


Related Products

Lumi Recessed
P.46-49



Micron IP54 Recessed
P.66

Occhio Pin / Slot Recessed
P.68-71



Spotify Concave Adjustable Round

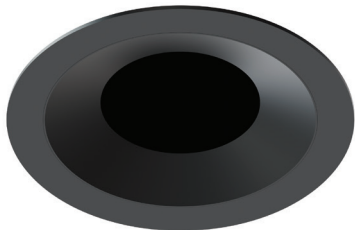



Spotify 76 Concave
Adjustable Round Trim





Spotify 76 Concave
Adjustable Round Trimless



Spotify 100 Concave
Adjustable Round Trim



Spotify 100 Concave
Adjustable Round Trimless



Code ordering example: **RR10MR21-903009D010**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Spotify 76 Concave Adjustable Round	RR10 ●	MR21 High Power LED	90	30 3000K	8W	711 lm	09 / 22	D0 No Dim	10 ■ Black
	RR11 ○			40 4000K		790 lm		DA Dali Dim	65 ■ Matt Black
		MB21 COB LED	98		9W	901 lm	18 / 24 / 34	DP Phase Dim	11 □ White
		MN21	90		10W	944 lm 1227 lm 1314 lm	18 / 21 / 25	DC CASAMBI D1 0-10V Dim	54 □ Matt White
Spotify 100 Concave Adjustable Round	RR12 ●	MC31 COB LED	90	30 3000K	11W	1160 lm	11 / 15 / 26		
	RR13 ○			40 4000K		1258 lm			
		MB23	95		16W	1615 lm	18 / 22 / 30 / 42		
		MN21	90		14W	1805 lm 1637 lm 1748 lm	11 / 14 / 25		

Notes:

* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For related accessories, please see page 53.
For the most updated product information, please go to our website.


Spotify Concave Adjustable Square

35°

30°

IP20


CE

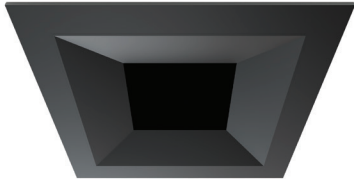

Spotify 76

Adjustable Square Trim


□70x70

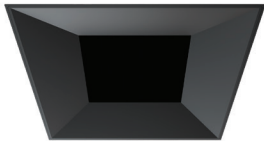

Spotify 76

Adjustable Square Trimless


□72x72



Spotify 100

Adjustable Square Trim


□92x92





Spotify 100

Adjustable Square Trimless

□92x92







Code ordering example: **RR14** **MR21** - **903009D010**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Spotify 76 Concave Adjustable Square	RR14 <div></div>	MR21 High Power LED	90	30 3000K	8W	711 lm	09 / 22	D0 No Dim	10 <div></div> Black
	RR15 <div></div>	MB21 COB LED	98	40 4000K	9W	790 lm	18 / 24 / 34	DA Dali Dim	65 <div></div> Matt Black
						901 lm		DP Phase Dim	11 <div></div> White
		MN21	90		10W	944 lm	18 / 21 / 25	DC CASAMBI	54 <div></div> Matt White
Spotify 100 Concave Adjustable Square	RR16 <div></div>	MC31 COB LED	90	30 3000K	11W	1160 lm	11 / 15 / 26		
	RR17 <div></div>	MB23	95	40 4000K	16W	1258 lm	18 / 22 / 30 / 42		
						1805 lm			
		MN21	90		14W	1637 lm	11 / 14 / 25		
						1748 lm			

Notes:

* For complete code ordering information, please see pages 214-215.

** For other CCT options, please contact us.

For related accessories, please see page 53.

For the most updated product information, please go to our website.

Optical Accessories

Product / Optical Accessories	Coloured Filters Colours 25, 42, 55, 85	Honeycomb Louvre Colours 10, 65, 11, 54	Linear Spread Colour 41	Flat Trim Colours 10, 65, 11, 54	Anti-Glare Cone Colours 10, 65, 11, 54	Snoot Colours 10, 65, 11, 54
Spotify 76 Concave Adjustable Round	/	2E54 *	2E59 *	2G49 *	2E57 *	2E56 *
Spotify 100 Concave Adjustable Round	2E38 *	2E92 *	2E93 *	2G50 *	2E95 *	2E96 *
Product / Optical Accessories	Coloured Filters Colours 25, 42, 55, 85	Honeycomb Louvre Colours 10, 65, 11, 54	Linear Spread Colour 41	Flat Trim Colours 10, 65, 11, 54		
Spotify 76 Concave Adjustable Square	/	2G17 *	2G18 *	2G51 *		
Spotify 100 Concave Adjustable Square	2E38 *	2E97 *	2E98 *	2G52 *		

* With holder

Working Catalogue - Recessed

www.formalighting.com

formalighting

Spotify

Recessed Downlight

Adjustable



Body

The Spotify product family is a series of small recessed downlights, available in round and square shaped light bodies and mounting trims, made in high-grade aluminum and interchangeable optics.

Available in trim and trimless and adjustable versions.

Spotify adjustable versions tilts 0°-35° inside the ceiling level and rotates 355°.

Developed as an ECO design for the circular economy, with its modularity, interchangeable optics and accessories and tool-free mounting.

Accessories

Tool free changeable.
Coloured filters, Honeycomb louvre, Linear Spread, Concave Trim, Anti-Glare Cone, Snoot.
Check page 57 for details.

Finish

Powder coat in black (10), Embossed matt black (65), white (11), or Embossed matt white (54).

LED sources

Light source options:
COB LED. CRI: 90 | CCT: 3000K, 4000K.
COB LED. CRI: 95 | CCT: 3000K, 4000K.
COB LED. CRI: 98 | CCT: 3000K, 4000K.
High Power LED. CRI: 90 | CCT: 3000K, 4000K.
Other CRI and CCT options available on request.

Optic

High grade PMMA Lenses.
Beam Angle: Narrow / Medium / Wide / Wallwasher.

Driver

Remote driver included.
Dimming options: 0-10V, DALI, Phase, CASAMBI.
220-240V 50/60Hz.

Applications

Versatile downlights with high definition optics and advanced LED technology delivering optimal visual comfort.
Application areas: High-end residential and retail projects, hotels, museums and galleries.


Related Products

Lumi Recessed
P.46-49

Micron IP54 Recessed
P.66

Occhio Pin / Slot Recessed
P.68-71

Spotify Adjustable Round

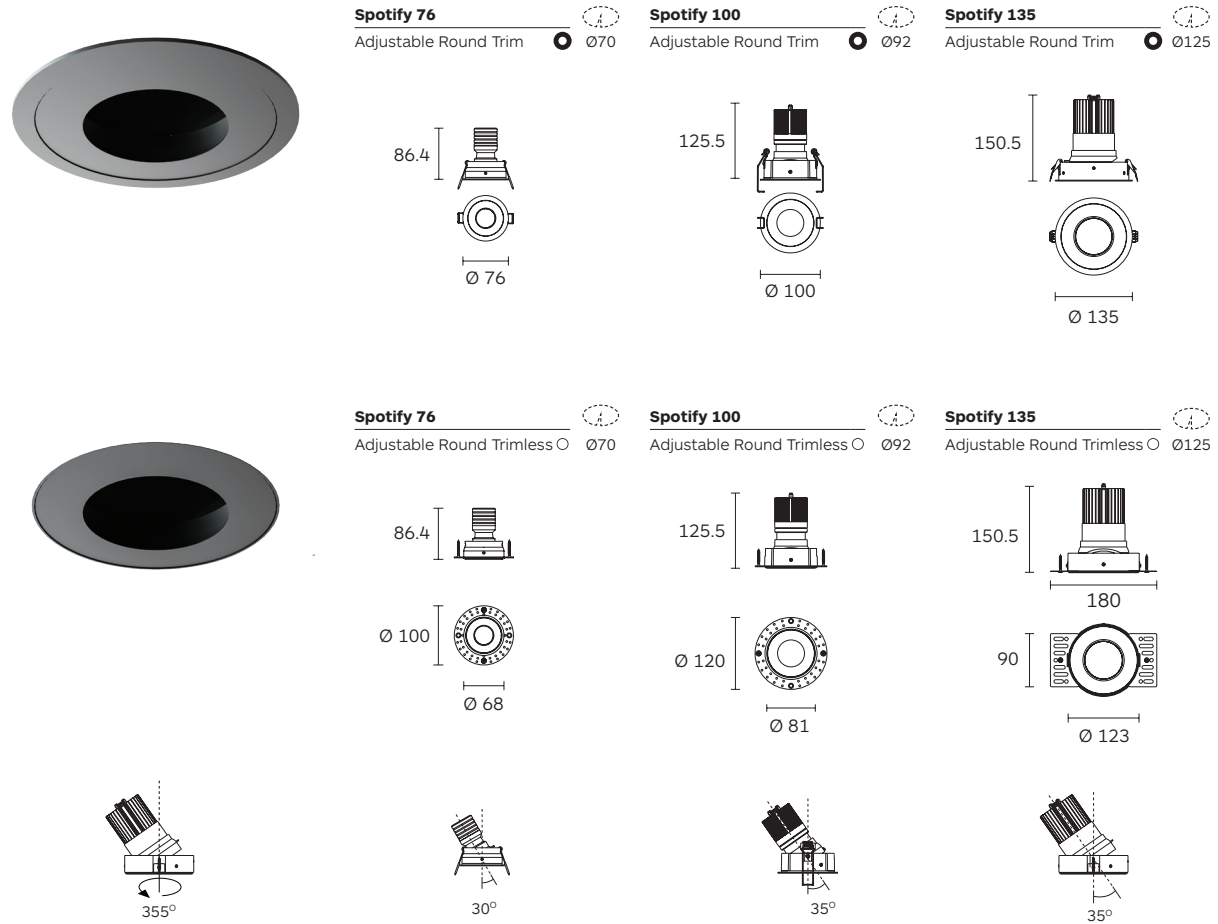


Code ordering example: **R P 7 7 M R 2 1 - 9 0 3 0 0 9 D 0 1 0**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Spotify 76 Adjustable Round	RP77 ●	MR21 High Power LED	90	30 3000K	8W	711 lm	09 / 22	D0 No Dim	10 ■ Black
	RP78 ○		40 4000K			790 lm		DA Dali Dim	65 ■ Matt Black
		MB21 COB LED	98		9W	901 lm	18 / 24 / 34	DP Phase Dim	11 □ White
		MN21	90		10W	1227 lm 1314 lm	18 / 21 / 25	DC CASAMBI	54 □ Matt White
Spotify 100 Adjustable Round	RP91 ●	MC31 COB LED	90	30 3000K	11W	1160 lm	11 / 15 / 26		
	RP92 ○		40 4000K			1258 lm			
		MB23	95		16W	1615 lm	18 / 22 / 30 / 42		
		MN21	90		14W	1805 lm 1637 lm 1748 lm	11 / 14 / 25		
Spotify 135 Adjustable Round	RQ43 ●	MC33 COB LED	90	30 3000K	21W	2569 lm	15 / 24 / 36		
	RQ44 ○		40 4000K			2703 lm			
		MN21			30W	2781 lm 2985 lm	09 / 23 / 33		

Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For related accessories, please see page 57.
For the most updated product information, please go to our website.

Spotify Adjustable Square





Spotify 76
Adjustable Square Trim



Spotify 76
Adjustable Square Trimless











Spotify 100
Adjustable Square Trim



Spotify 100
Adjustable Square Trimless



Code ordering example: **R Q 8 3 M R 2 1 - 9 0 3 0 0 9 D 0 1 0**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Spotify 76 Adjustable Square	RQ83 	MR21 High Power LED	90	30 3000K	8W	711 lm	09 / 22	D0 No Dim	10  Black
	RQ84 			40 4000K		790 lm		DA Dali Dim	65  Matt Black
		MB21 COB LED	98		9W	901 lm	18 / 24 / 34	DP Phase Dim	11  White
						944 lm		DC CASAMBI	54  Matt White
Spotify 100 Adjustable Square		MN21	90		10W	1227 lm	18 / 21 / 25	D1 0-10V Dim	
						1314 lm			
	RP93 	MC31 COB LED	90	30 3000K	11W	1160 lm	11 / 15 / 26		
	RP94 			40 4000K		1258 lm			
		MB23	95		16W	1615 lm	18 / 22 / 30 / 42		
						1805 lm			
		MN21	90		14W	1637 lm	11 / 14 / 25		
						1748 lm			

Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For related accessories, please see page 57.
For the most updated product information, please go to our website.

Optical Accessories

Product / Optical Accessories	Coloured Filters Colours 25, 42, 55, 85	Honeycomb Louvre Colours 10, 65, 11, 54	Linear Spread Colour 41	Concave Trim Colours 10, 65, 11, 54	Anti-Glare Cone Colours 10, 65, 11, 54	Snoot Colours 10, 65, 11, 54
Spotify 76 Adjustable Round	/	2E54 #	2E59 #	2E55 #	2E57 #	2E56 #
Spotify 100 Adjustable Round	2E38 *	2E92 #	2E93 #	2E94 #	2E95 #	2E96 #
Spotify 135 Adjustable Round	2E39 *	2368 #	/	/	/	/

Product / Optical Accessories	Coloured Filters Colours 25, 42, 55, 85	Honeycomb Louvre Colours 10, 65, 11, 54	Linear Spread Colour 41	Concave Trim Colours 10, 65, 11, 54
Spotify 76 Adjustable Square	/	2G17 #	2G18 #	2G19 #
Spotify 100 Adjustable Square	2E38 *	2E97 *	2E98 #	2E99 #

* With holder

Optica

Adjustable Recessed Round & Square



Body

Optica Series offers excellent control and provides high visual comfort, thanks to the deep recessed and double optical system. The primary optical system, made from a reflector on the LED, generates a beam angle of 46°, 40°, 33°, 22° and 18°. The secondary optical system consists of a dark anti-glare reflector, this results pure light without noticing the light source or glare.

Optica series are fully adjustable 0-25° available in 3 sizes, both round and square, trim and trimless.

Following Formalighting's Eco Design philosophy Optica offers tool-free optical accessories site changeable options.

Accessories

Tool-free interchangeable Honeycomb, Round, Oval and Square Pin Hole covers. Check page 61 for details.

Finish

Powder Coated black (10), Embossed matt black (65), white (11), or Embossed matt white (54). Chrom, Sanded white & Black Coated Reflector.

LED sources

COB
CRI:90 | RA > 90 | CCT: 3000K, 4000K
3-Step MacAdam
Other CRI and CCT options are available on request.

Optic

Beam angle: Narrow / Medium / Wide.
PMMA lens with reflector.
Chrom, Sanded white & Black Coated Reflector.

Driver

Remote driver 220-240VAC included.
Diming options: 0-10V, DALI, Phase, Casambi.
220-240V 50/60Hz.

Applications

Recessed mounted luminaires with deep recessed with dark reflector design offer excellent glare control to provide ambient or accent lighting.
Application areas: High-end residential, hospitality, corridors.


Related Products

Spotify Recessed Series
P.50-57




Optica Round



Optica 62 Adjustable Trim Ø55 **Optica 84** Adjustable Trim Ø75 **Optica 110** Adjustable Trim Ø95

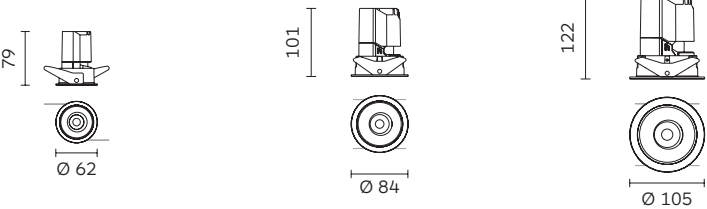

Optica 62 Adjustable Trimless Ø58 **Optica 84** Adjustable Trimless Ø77 **Optica 110** Adjustable Trimless Ø97




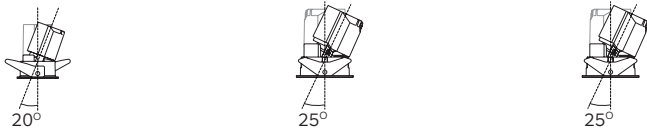
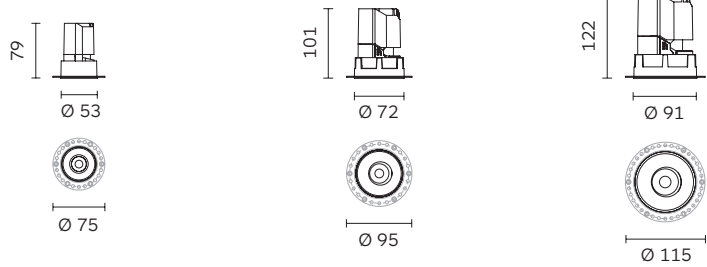


Code ordering example: **R Q 4 5 B C 3 1 - 9 0 3 0 2 2 D 0 1 0**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Optica 62 Round Adjustable	RQ45 BC31	COB LED	90	30 3000K	5.9W	705 lm	22 / 28 / 46	D0 No Dim	10 Black
	RQ46			40 4000K		770 lm		DA Dali Dim	65 Matt Black
Optica 84 Round Adjustable	RQ47 BC31	COB LED			9.1W	1008 lm	18 / 23 / 33	DP Phase Dim	11 White
	RQ48					1099 lm		DC CASAMBI	54 Matt White
Optica 110 Round Adjustable	RQ49 BC22	COB LED			14W	1744 lm	22 / 33 / 40	D1 0-10V Dim	
	RQ50					1956 lm			

Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For related accessories, please see pages 61.
For the most updated product information, please go to our website.

Optica Square

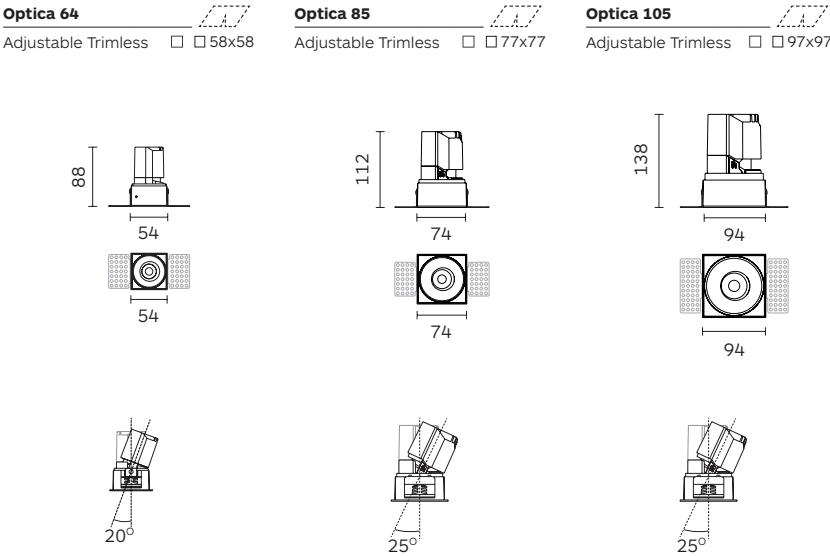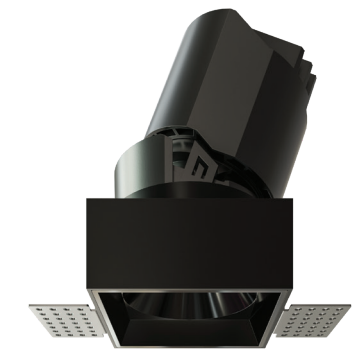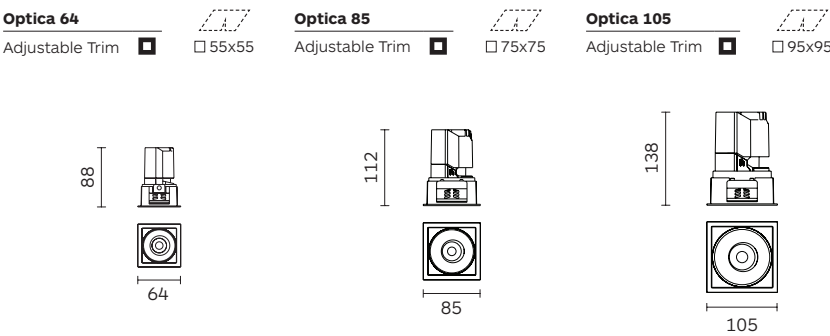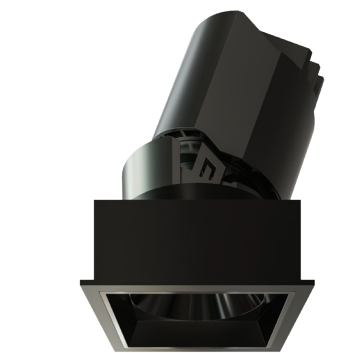

Code ordering example: **R Q 5 1 B C 3 1 - 9 0 3 0 2 2 D 0 1 0**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Optica 64 Square Adjustable	RQ51 <input checked="" type="checkbox"/> BC31	COB LED	90	30 3000K	5.9W	705 lm	22 / 28 / 46	D0 No Dim	10 Black
	RQ52 <input type="checkbox"/>			40 4000K		770 lm		DA Dali Dim	65 Matt Black
Optica 85 Square Adjustable	RQ53 <input checked="" type="checkbox"/> BC31	COB LED			9.1W	1008 lm	18 / 23 / 33	DP Phase Dim	11 <input type="checkbox"/> White
	RQ54 <input type="checkbox"/>					1099 lm		DC CASAMBI	54 <input type="checkbox"/> Matt White
Optica 105 Square Adjustable	RQ55 <input checked="" type="checkbox"/> BC22	COB LED			14W	1744 lm	22 / 33 / 40	D1 0-10V Dim	
	RQ56 <input type="checkbox"/>					1956 lm			

Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For related accessories, please see page 61.
For the most updated product information, please go to our website.

Optical Accessories


Product / Optical Accessories	Honeycomb Colour 10	Round Pin Hole Colours 10, 65, 11, 54	Oval Pin Hole Colours 10, 65, 11, 54	Square Pin Hole Colours 10, 65, 11, 54
Optica 62 Round	2F39	/	/	/
Optica 84 Round	2F40	2F36	2F37	/
Optica 110 Round	2F41	/	/	/
Optica 64 Square	2F39	/	/	/
Optica 85 Square	2F40	/	/	2F38
Optica 105 Square	2F41	/	/	/

Round Reflector			
Square Reflector			
	Chrom	Sanded white	Black Coated

Espresso

Recessed Spotlight

Concave / Wallwasher

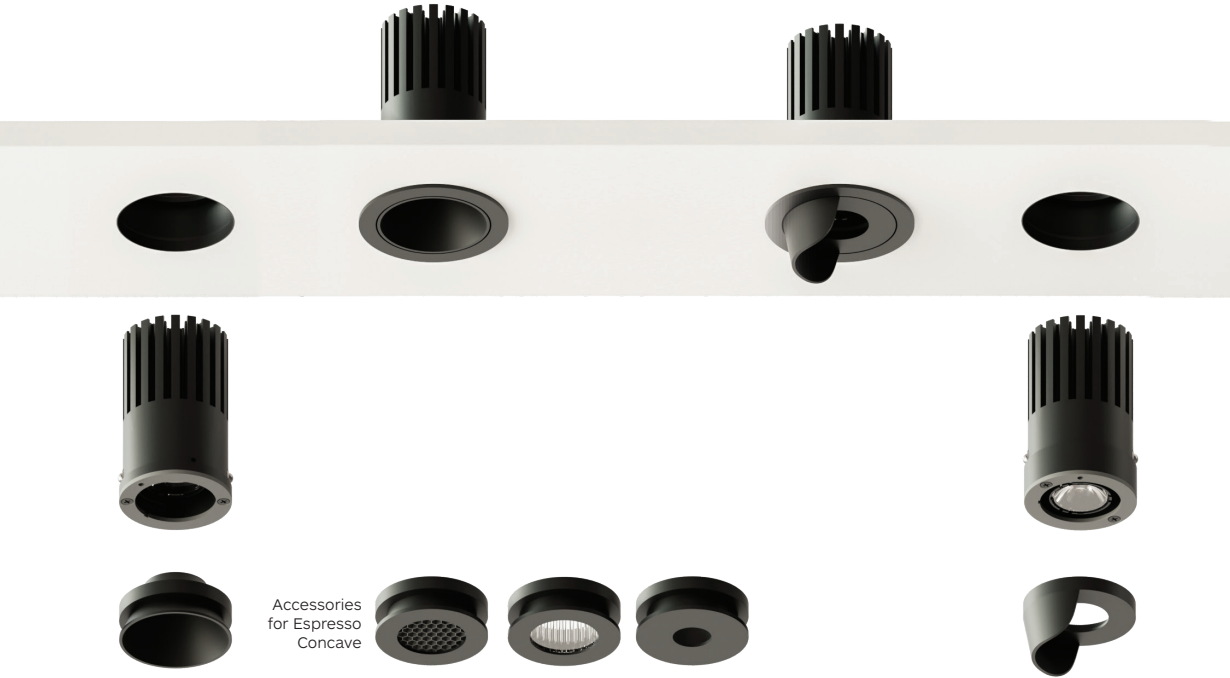

Body

The Espresso product family is a series of high performance, miniature, recessed LED luminaires with a round body made in high grade aluminium, providing accent or wall wash lighting from its deep regressed light source.

Available in trim and trimless versions.

Developed as an ECO design for the circular economy, with its modularity, interchangeable optics and accessories and tool-free mounting.

Accessories

Tool free changeable.
Honeycomb, Linear Spread, Pin Hole.
Check page 65 for details.

Finish

Powder coat in black (10), Embossed matt black (65), white (11), or Embossed matt white (54) colour.

LED sources

Light source options: High Power LED.
CRI: 90 | CCT: 3000K, 4000K.
Other CRI and CCT options available on request.

Optic

High Grade PMMA Lenses.
Beam Angle: Narrow / Medium / Wide / Wallwasher.


Driver

Remote driver included.
Dimming Options: 0-10V, DALI, Phase, CASAMBI.
220-240V 50/60Hz.




Applications

These small but powerful luminaires create perfect accent lighting or wall washing effects, together with an array of options and accessories for maximum flexibility.
Application areas: High-end residential and retail projects, hotels, museums and galleries

Related Products



Espresso Concave


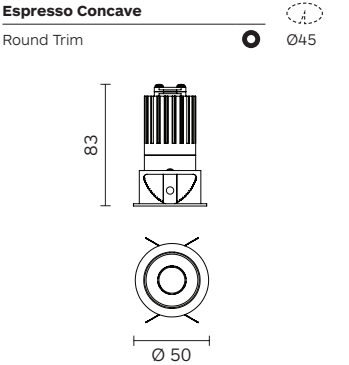


Code ordering example: **RP81** **MR21** - **90** **30** **15** **D0** **10**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Espresso Concave Round	RP81	MR21 High Power LED	90	30 3000K	3.9 W	439 lm	15 / 20 / 32	D0 No Dim	10 Black
	RP82			40 4000K		483 lm		DA Dali Dim	65 Matt Black
								DP Phase Dim	11 White
								DC CASAMBI	54 Matt White
								D1 0-10V Dim	

Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For related accessories, please see page 61.
For the most updated product information, please go to our website.

Espresso Wallwasher

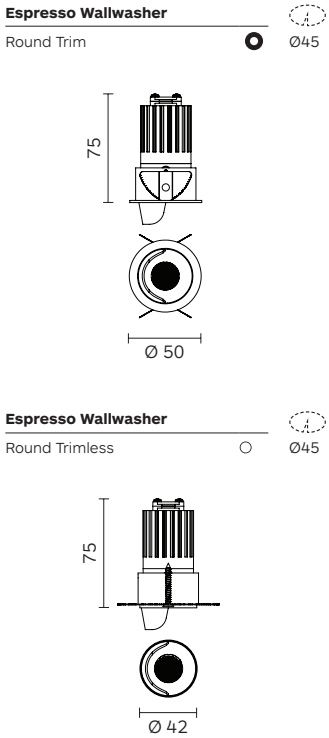

Code ordering example: **RP83MR21-9030WWD010**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Espresso Wallwasher Round	RP83	MR21 High Power LED	90	30 3000K	3.9 W	439 lm	WW	D0 No Dim	10 Black
	RP84			40 4000K		483 lm		DA Dali Dim	65 Matt Black
								DP Phase Dim	11 White
								DC CASAMBI	54 Matt White
								D1 0-10V Dim	

Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
WW = Wallwasher
For the most updated product information, please go to our website.


Optical Accessories

Product / Optical Accessories	 Honeycomb Louvre Colours 10, 65	 Linear Spread Colour 41	 Pin Hole Colours 10, 65, 11, 54
Espresso Concave	2E52*	2E51*	2E50*
Espresso Wallwasher	/	/	/

* For Downlight only. To be ordered separately.
** For Wallwasher version, inclusive of glare shield accessory.

Micron

Recessed

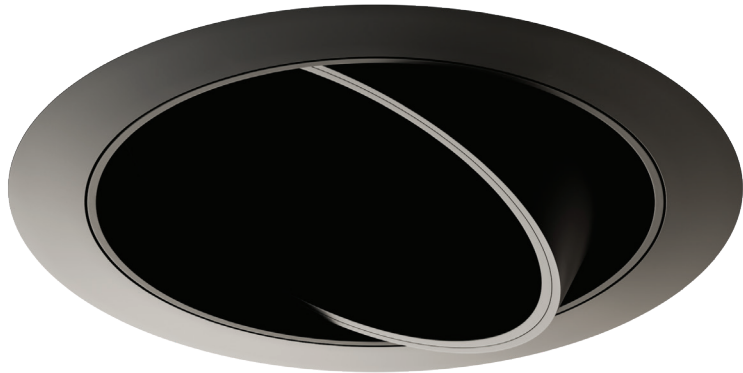

Body

Round-shaped mounting trim in cast aluminum with springs for trim installation on a ceiling thickness max. 20mm.

Lamp body in cast aluminum and fixing ring in steel. Fixing ring can be installed independently.

Easy relamping via removable light head by snap-in catch action. Tilttable vertically 0°-35° and rotatable horizontally 350°.

Available in IP20 / IP54 versions.

Accessories

N/A

Finish

Powder coat in black (10), Embossed matt black (65), white (11), or Embossed matt white (54) colour.

LED sources

Light source options: COB LED. Retrofit.
CRI: 90 | CCT: 3000K, 4000K.
Other CRI and CCT options available on request.

Optic

Lens.
Beam Angle: Narrow / Medium / Wide.

Driver

Supplied with non-dimmable remote driver.
Dimming Options: 0-10V Dim, DALI, Phase, CASAMBI.
220-240V 50/60Hz.

Applications


Designed with a concealed light source small aperture to minimize glare and to blend seamlessly into the architecture.
Application areas: retail, showrooms, residential, restaurants, hotels.

Related Products



Lumi Recessed
P.46-49

Aqualuce Recessed
P.86



Micron




Micron
Adjustable Trim ☒ LED ☐ Retrofit
Ø68 Ø68







Micron
Adjustable Trim ☒ LED ☐ Retrofit
Ø68 Ø68



Micron
Adjustable Trimless ☐ LED ☐ Retrofit
Ø72 Ø80



Micron
Adjustable Trimless ☐ LED ☐ Retrofit
Ø72 Ø80



Code ordering example: **R L 5 9 M C 2 2 - 9 0 3 0 1 8 D 0 1 0**

	Product Code	Ingress Protection	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Micron Adjustable	RL59 <input checked="" type="radio"/>	IP20	MC22 COB LED	<input checked="" type="checkbox"/>	90	30 3000K	10W	1220 lm	18 / 24 / 36	D0 No Dim 10 <input checked="" type="checkbox"/> Black
	RO56 <input type="radio"/>					40 4000K		1260 lm		DA Dali Dim 65 <input checked="" type="checkbox"/> Matt Black
	RL60 <input checked="" type="radio"/>	IP54		<input type="checkbox"/>						DP Phase Dim 11 <input type="checkbox"/> White
	RO57 <input type="radio"/>									DC CASAMBI 54 <input type="checkbox"/> Matt White
									D1 0-10V Dim	
			GU53 Retrofit MR16-GU5.3 <input checked="" type="checkbox"/>		00		/	/	00	No Driver
	GU10		GU10-GZ10 <input type="checkbox"/>							

Notes:

* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For the most updated product information, please go to our website.

Occhio

Recessed 65 | 87

Pin Fixed



Pin Adjustable



Slot Adjustable



Body

Round-shaped mounting trim in cast aluminum with brackets for trim installation on a ceiling thickness max. 20mm.

Light body in cast aluminum. Available in two different designs, Pin and Slot.

Available in IP44 version.

Designed with deep regressed lamp position for glare-free comfort. Adjustable version tiltable vertically 0°-35°.

Accessories

Occhio 65: Honeycomb louvre.
Occhio 87: Coloured filters, linear spread, honeycomb louvre, protective recessed ring, protective ring.
Check page 89 for details.

Finish

Powder coat in black (10), Embossed matt black (65), white (11), Embossed matt white (54) or grey (75).

LED sources

Light source options: COB LED. Retrofit.
CRI: 90 | CCT: 3000K, 4000K.
Other CRI and CCT options available on request.

Optic

Reflector.
Beam Angle: Narrow / Medium / Wide.

Driver

Supplied with non-dimmable remote driver.
Dimming Options: 0-10V Dim, DALI, Phase, CASAMBI.
220-240V 50/60Hz.

Applications

Outstanding lighting fixture. Occhio Pin provides a consistent ceiling appearance whilst the Occhio Slot provides the maximum adjustment in this type of small fixture.
Application areas: bathrooms, residential, museums, retail, hotels.

Related Products

Venus Wallwasher Recessed
P.74-77

Aqualuce Recessed
P.86

Occhio Pin Fixed




IP20




IP44





Occhio Pin 65
Pin Fixed Trim  Ø57











Occhio Pin 87
Pin Fixed Trim  Ø75



Occhio Pin 87
Pin Fixed Trim  Ø75




Code ordering example: **R N 5 7 G U 0 4 - 0 0 0 0 0 0 0 0 1 0**

	Product Code	Ingress Protection	Light Source Code*		>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Occhio 65 Pin Fixed	RN57 	IP20	GU04	Retrofit MR11-GU4	00	00	/	/	00	00 No Driver	10  Black
			MC31	COB LED	90	30 3000K	6W	616 lm	16 / 30	D0 No Dim	65  Matt Black
						40 4000K		643 lm		DA Dali Dim	11  White
Occhio 87 Pin Fixed	RK96  RL38 	IP20 IP44	MC22 COB LED				10W	1220 lm	18 / 24 / 36	DP Phase Dim	54  Matt White
								1260 lm		DC CASAMBI	75  Grey
										D1 0-10V Dim	
			GU53	Retrofit MR16-GU5.3	00	00	/	/	00	00 No Driver	
			GU10	GU10-GZ10							

Notes:

* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For related accessories, please see pages 88-89.
For the most updated product information, please go to our website.

Occhio Pin Adjustable

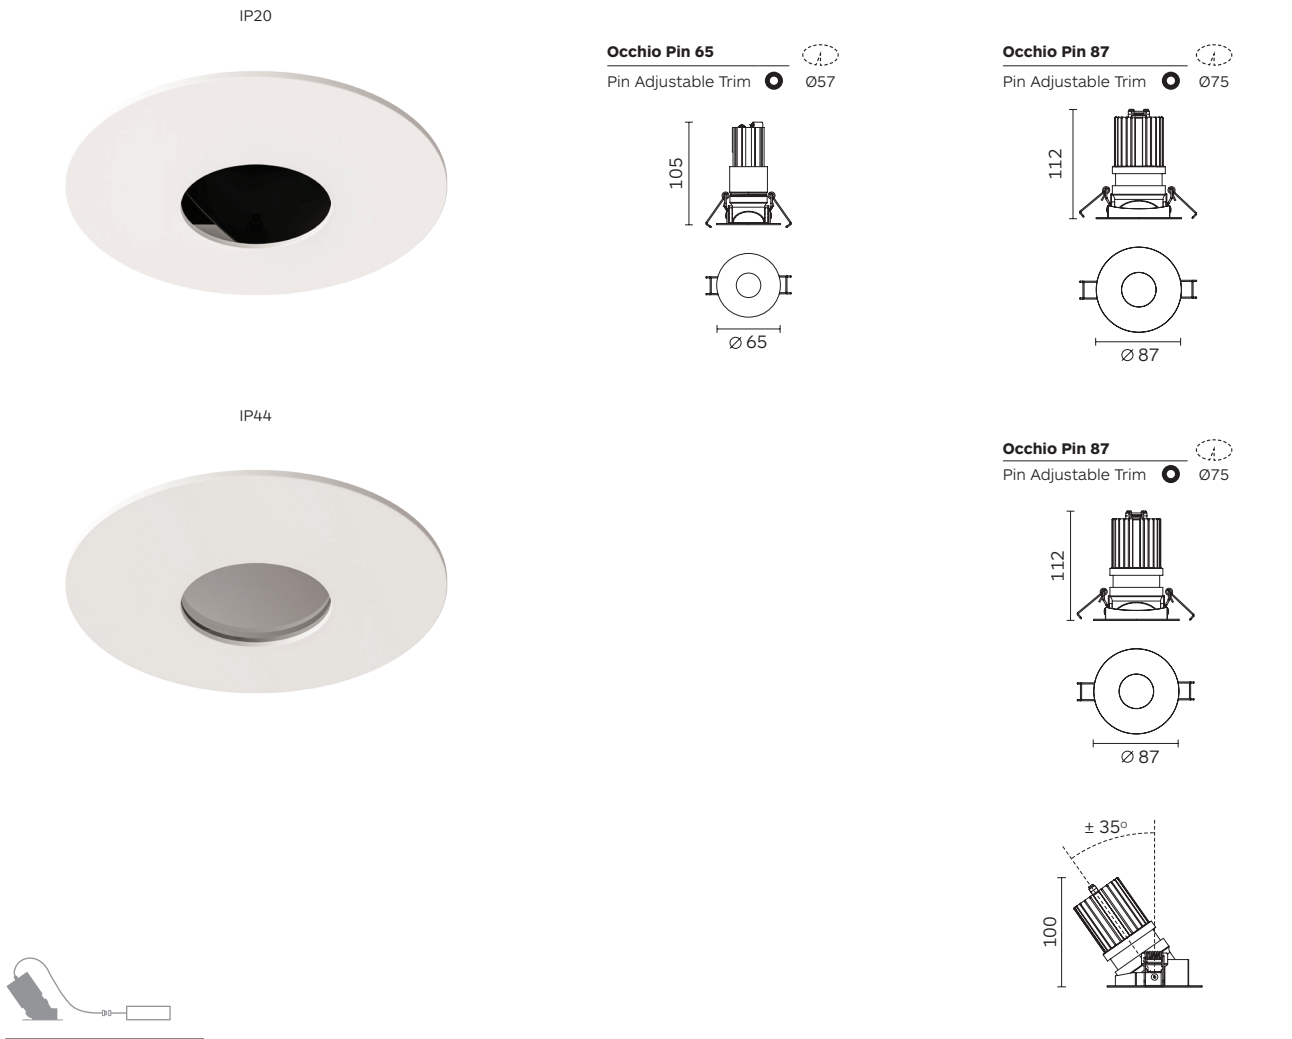


Code ordering example: **R N 5 8 G U 0 4 - 0 0 0 0 0 0 1 0**

	Product Code	Ingress Protection	Light Source Code*		>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Occhio 65 Pin Adjustable	RN58	IP20	GU04	Retrofit MR11-GU4	00	00	/	/	00	00 No Driver	10 Black
			MC31	COB LED	90	30 3000K	6W	616 lm	16 / 30	D0 No Dim	65 Matt Black
						40 4000K		643 lm		DA Dali Dim	11 White
Occhio 87 Pin Adjustable	RL01	IP20	MC22 COB LED				10W	1220 lm	18 / 24 / 36	DP Phase Dim	54 Matt White
			RL42	IP44				1260 lm		DC CASAMBI	75 Grey
										D1 0-10V Dim	
			GU53	Retrofit MR16-GU5.3	00	00	/	/	00	00 No Driver	
			GU10	GU10-GZ10							

Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For related accessories, please see pages 88-89.
For the most updated product information, please go to our website.

Occhio Slot Adjustable

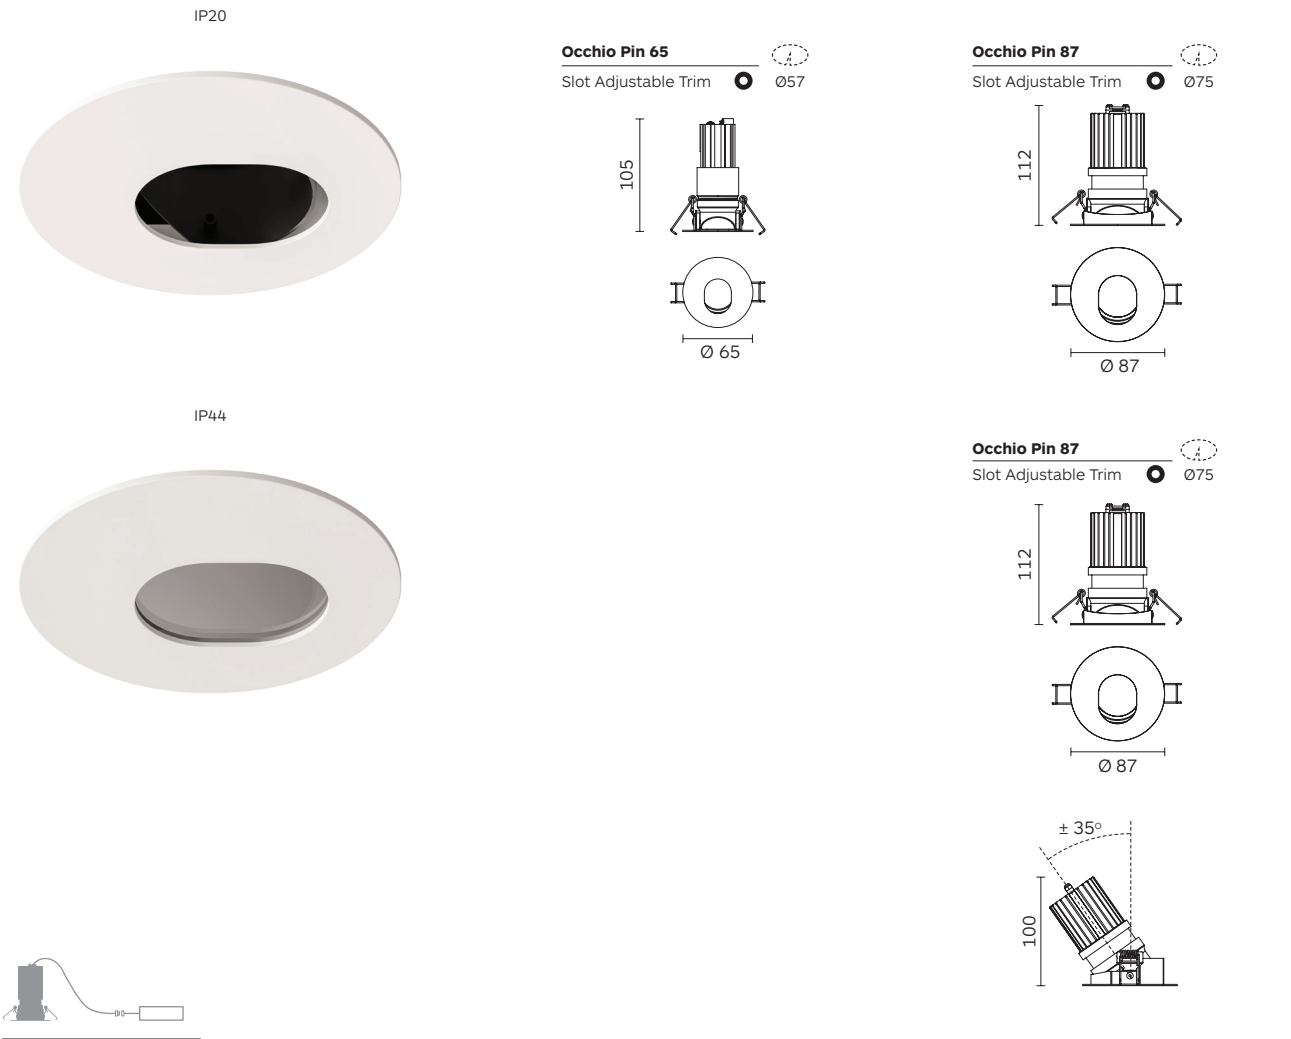


Code ordering example: **R N 5 6 G U 0 4 - 0 0 0 0 0 0 1 0**

	Product Code	Ingress Protection	Light Source Code*		>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Occhio 65 Slot Adjustable	RN56	IP20	GU04	Retrofit MR11-GU4	00	00	/	/	00	00 No Driver	10 Black
			MC31	COB LED	90	30 3000K	6W	616 lm	16 / 30	D0 No Dim	65 Matt Black
						40 4000K		643 lm		DA Dali Dim	11 White
Occhio 87 Slot Adjustable	RL05	IP20	MC22 COB LED				10W	1220 lm	18 / 24 / 36	DP Phase Dim	54 Matt White
			RL46	IP44				1260 lm		DC CASAMBI	75 Grey
										D1 0-10V Dim	
			GU53	Retrofit MR16-GU5.3	00	00	/	/	00	00 No Driver	
			GU10	GU10-GZ10							

Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For related accessories, please see pages 88-89.
For the most updated product information, please go to our website.

Ovo

Recessed Adjustable 65 | 90 | 160

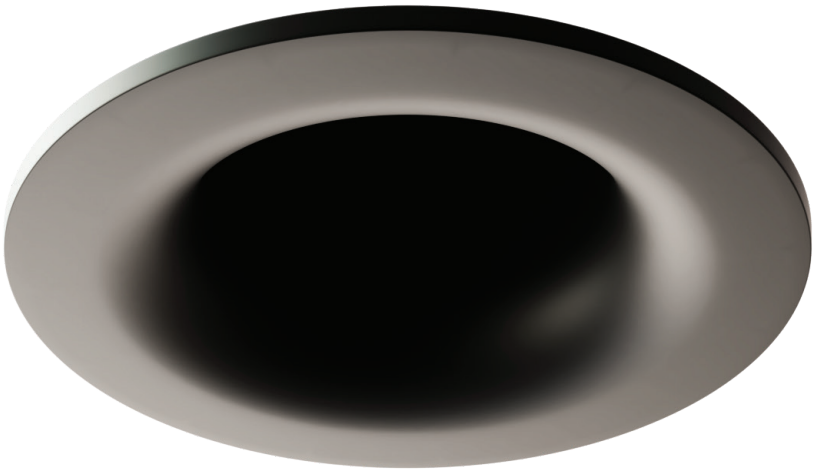

Body

Round-shaped mounting in cast aluminum with brackets (Ovo 160) or clamps (Ovo 90, 65) for trim installation on ceiling thickness max. 12mm or brakets for trimless installation on ceiling thickness max. 30mm.

Luminaire body in cast aluminum. Regressed lamp holder position for minimum glare.

Adjustable version tiltable vertically 0°-30° and rotatable horizontally 350°.

Accessories

N/A

Finish

Powder coat in black (10), Embossed matt black (65), white (11), or Embossed matt white (54).

LED sources

Light source options: COB LED. Retrofit.
CRI: 90 | CCT: 3000K, 4000K.
Other CRI and CCT options available on request.

Optic

Lens or reflector.
Beam Angle: Narrow / Medium / Wide.

Driver

Supplied with non-dimmable remote driver.
Dimming Options: 0-10V Dim, DALI, Phase, CASAMBI.
220-240V 50/60Hz.


Applications

Organic form, provide excellent glare control to minimize impact while piercing through ambient light levels to meet the highest functional requirements of architectural lighting design.
Application areas: hotels, residential, retail, galleries.

Related Products



Ovo Adjustable

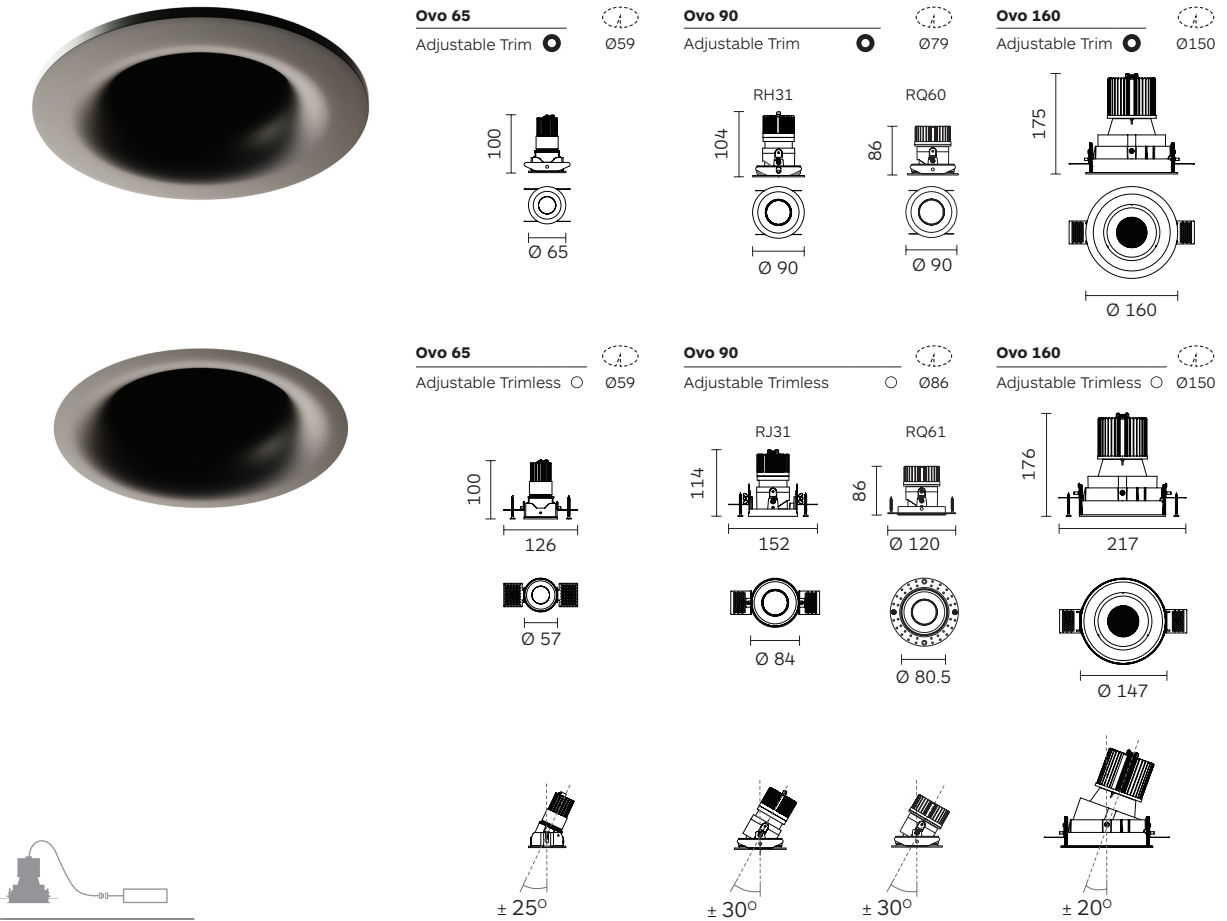

Code ordering example: **R J 2 9 M C 3 1 - 9 0 3 0 1 6 D 0 1 0**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Ovo 65 Adjustable	RJ29 ●	MC31 COB LED	90	30 3000K	6W	616 lm	16 / 24 / 32	D0 No Dim	10 ■ Black
	RJ30 ○			40 4000K		643 lm		DA Dali Dim	65 ■ Matt Black
	RQ60 ●	MC31 COB LED			11W	1160 lm	15 / 24 / 34	DP Phase Dim	11 □ White
	RQ61 ○					1258 lm		DC CASAMBI	54 □ Matt White
	RH31 ●	MC22 COB LED			10W	1238 lm	18 / 24 / 34	D1 0-10V Dim	
Ovo 90 Adjustable	RJ31 ○					1260 lm			
		GU53* Retrofit MR16-GU5.3	00	00	/	/	00	00 No Driver	
		GU10* GU10-GZ10							
Ovo 160 Adjustable	RJ32 ●	MC33 COB LED	90	30 3000K	33W	3220 lm	12 / 22 / 32	D0 No Dim	
	RJ33 ○			40 4000K		3300 lm		DA Dali Dim	
								DP Phase Dim	
								DC CASAMBI	
								D1 0-10V Dim	

Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For the most updated product information, please go to our website.
* Light Source code GU53 & GU10 is available for all the Ovo 90 adjustable.

Venus

Recessed Round & Square 125

Round or square-shaped mounting trim in cast aluminum with brackets for trim installation on ceiling thickness max. 32mm or trimless installation on ceiling thickness max. 25mm.


Luminaire body in cast aluminum with catch retainer for easy trim insertion /removal and integrated steel sheet, inclusive of a tool-less locking point and safety cable.

For complete code ordering information, please see pages 214-215.

LED Sources:

High Rendering:
CRI: 90 | CCT: 3000K, 4000K.

- 10 - Black
- 65 - Embossed matt black
- 11 - White
- 54 - Embossed matt white

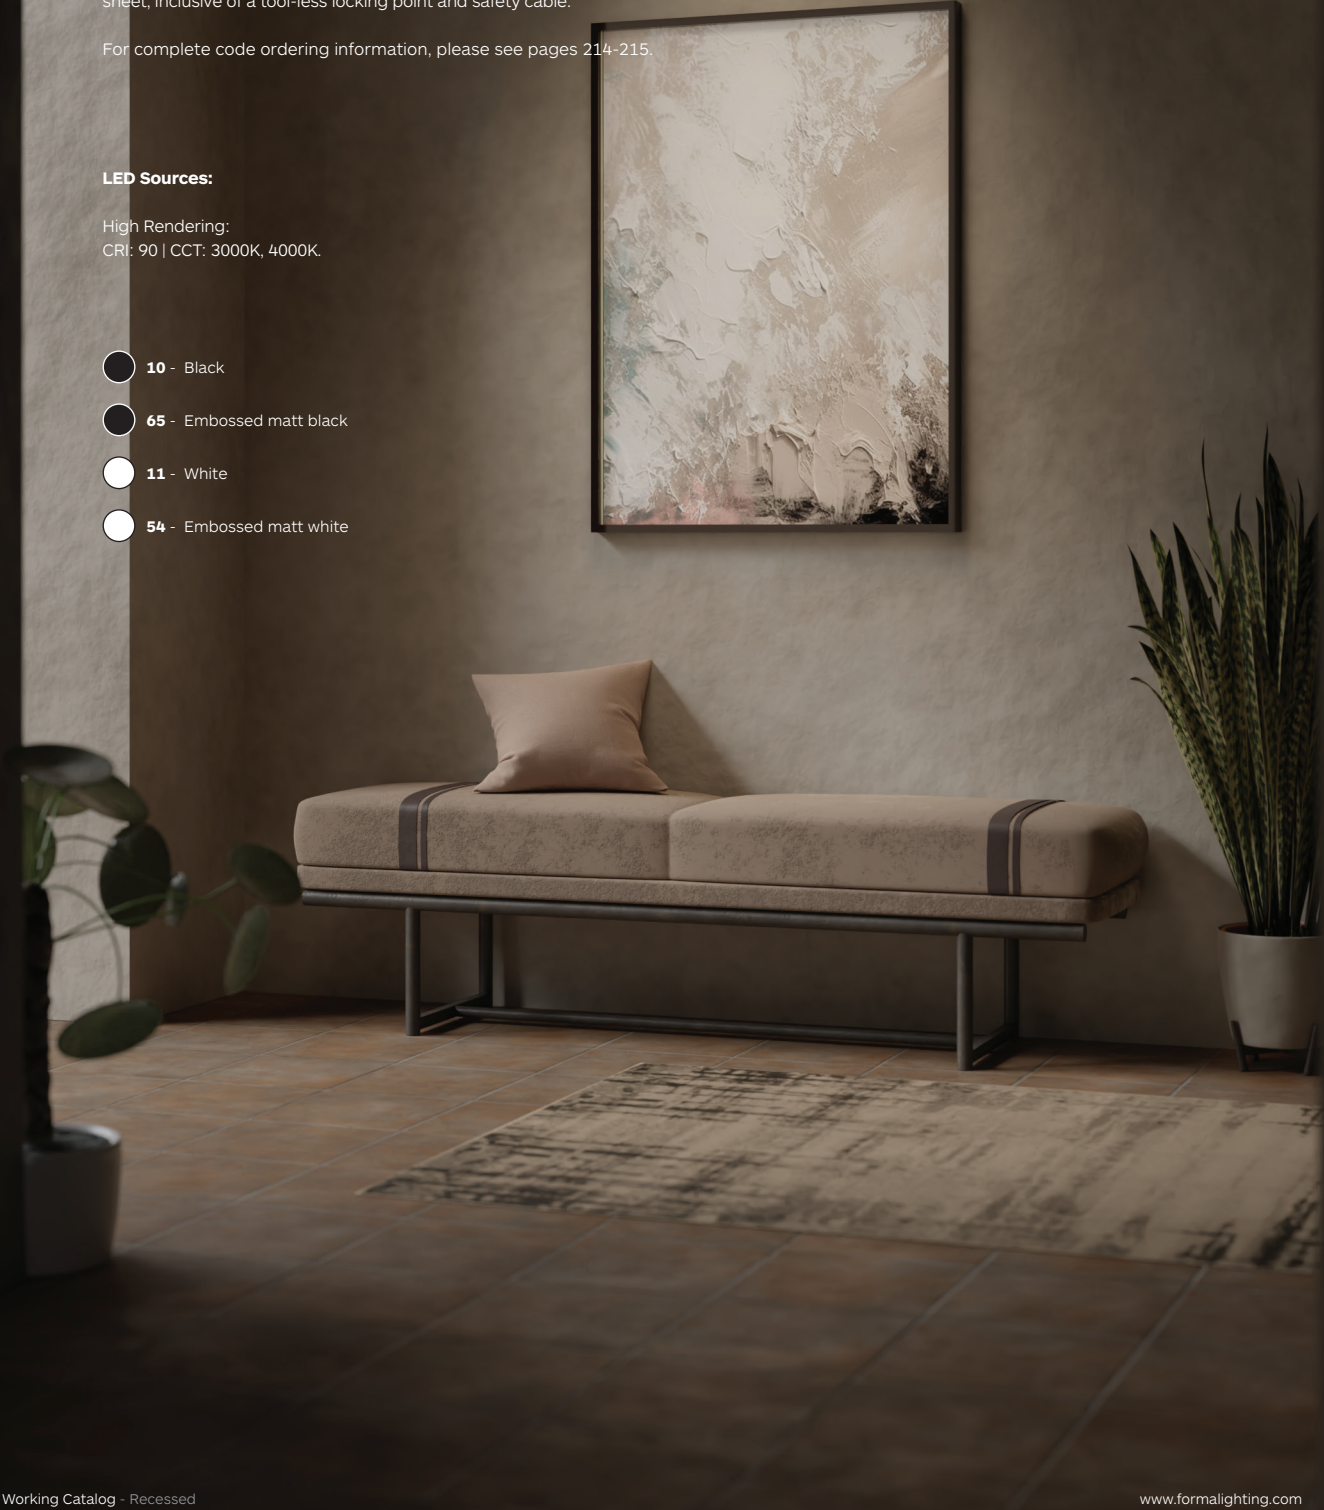

Venus Wallwasher Round

IP40

CE

10

65

11


54

Venus 125

Trim



Ø116




Venus 125

Trimless



Ø116



		Product Code	Light Source Codes	LED Power	Nominal Lumen	Beam Angle	Dimming Options	CCT Options
<div>CRI>90 3000K</div> <div>High Rendering</div>	Venus 125 Wallwasher	RG46	MC22	22W	2418 lm	WW	D0 No Dim	30 3000K
		RG47					DA Dali Dim	40 4000K
							DP Phase Dim	
							DC CASAMBI	
							D1 0-10V Dim	

WW = Wallwasher optics.

Venus Wallwasher Square

IP40

CE

10

65


11

54

Venus 125

Trim ☒ 


 114



Venus 125

Trimless ☐ 

 114



		Product Code	Light Source Codes	LED Power	Nominal Lumen	Beam Angle	Dimming Options	CCT Options
<div>CRI>90 3000K</div> <div>High Rendering</div>	Venus 125 Wallwasher	RG52 <input checked="" type="checkbox"/>	MC22	22W	2418 lm	WW	D0 No Dim	30 3000K
		RG53 <input type="checkbox"/>					DA Dali Dim	40 4000K
							DP Phase Dim	
							DC CASAMBI	
							D1 0-10V Dim	

WW = Wallwasher optics.



Venus Wallwasher Square

Image credits: formalighting's Design Department

MonoLED & GiroLED

Recessed

Fixed



Adjustable



Body

Round recessed spotlight. Luminaire body in cast aluminum with optimal passive thermal management. Quick and easy installation via concealed springs for snap-in catch action for minimum ceiling thickness. Supplied pre-wired with 240mm cable and male/female plugs ready to plug-in to power LED converter unit.

Adjustable version tiltable vertically 0°-25° and rotatable horizontally 350°.

LED sources

High power LED.
CRI: 90 | CCT: 3000K, 4000K.
Other CRI and CCT options available on request.

Optic

Lens.
Beam Angle: Narrow / Wide.

Accessories

Extension cable.
Check page 81 for details.

Finish

Powder coat in black (10), Embossed matt black (65), white (11), Embossed matt white (54), nickel (34) or grey (75).

Driver

Remote driver not included to be order separatly.

Applications

Miniature recessed luminaries with a disappearing look and ideal for display and under cabinet illumination.
Application areas: cabinet displays, showcases, under-cabinet, undershelf, retail, residential, restaurants, galleries, museums, showroom.

Related Products

Lumi Recessed
P.46-49

Espresso Concave
P.63




MonoLED



MonoLED
Fixed Round Trim



Code ordering example: **2 9 7 4 B N 1 1 - 9 0 3 0 1 4 0 0 1 0**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
MonoLED Round	2974  BN11	High Power LED	90	30 3000K	2W	150 lm	14 / 40	00 No Driver	10  Black
				40 4000K		162 lm			65  Matt Black
				BL UE BLUE		/			
				RE DO RED					
				GR EN GREN					
	YE LL YELL								
	RG BO RGB				3x1W				
	RG BW RGBW								

Notes:

* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For related accessories, please see page 81.
For the most updated product information, please go to our website.

GiroLED / GiroLED Deep








GiroLED
Fixed Round Trim



GiroLED
Adjustable Round Trim



GiroLED Deep
Adjustable Round Trim




Code ordering example: **RD37BN11-9030140010**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
GiroLED Fixed	RD37	BN11 High Power LED	90	30 3000K	2W	150 lm	14 / 40	00 No Driver	10 ■ Black
GiroLED Adjustable	RD39			40 4000K		162 lm			65 ■ Matt Black
GiroLED Deep	RH34		BL	UE BLUE		/			11 □ White
			RE	DO RED					54 □ Matt White
			GR	EN GREN					34 ■ Nickel
			YE	LL YELL					75 ■ Grey
			RG	BO RGB	3x1W				
			RG	BW RGBW					


Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For related accessories, please see page 81.
For the most updated product information, please go to our website.

Optical Accessories

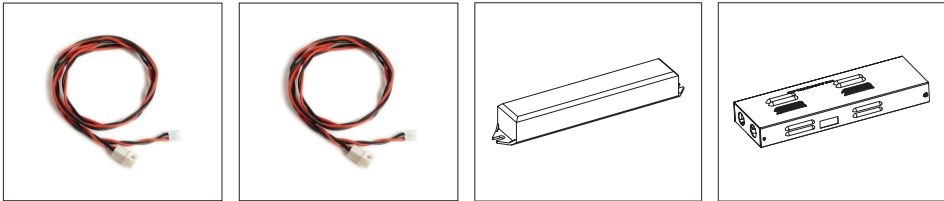


Product / Optical Accessories	Extension Cable	Extension Cable	Electronic LED Driver	DMX LED Driver
	For single colour L: 1000mm	For RGB L: 1000mm	Input: 220-240V 50/60Hz For 1-6 pcs LED 2W 500mA	DMX driver and power supply unit. Input: 100-240V 50/60Hz For 2-12 pcs MonoLED RGB
MonoLED				2986
GiroLED	2477	2983	2790	/
GiroLED Deep				/

LED Driver Measurements




LED Driver Measurements




Single Colour Wiring Diagram

Single-unit connection

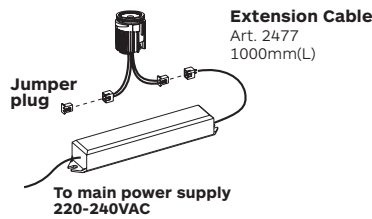


Single Colour Wiring Diagram

Multi-unit connection

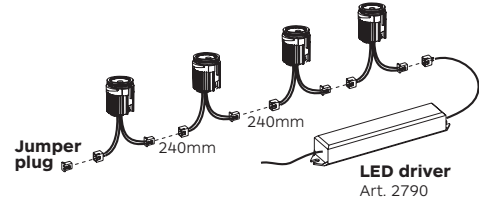

RGB Wiring Diagram

Multi-unit connection

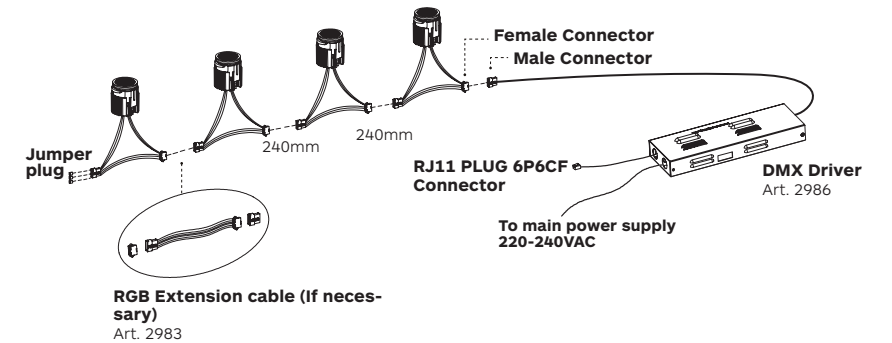

Girofix

Recessed

Round recessed spotlight. Luminaire body in cast aluminum with optimal passive thermal management. Quick and easy installation via concealed springs for snap-in catch action for minimum ceiling thickness. Supplied pre-wired with 240mm cable and male/female plugs ready to plug into power LED converter unit.

For complete code ordering information, please see pages 214-215.

LED Sources:

High Rendering:
CRI: 90 | CCT: 3000K, 4000K.

Retrofit
GU04 / GU10 / GU5.3

- 10 - Black
- 65 - Embossed matt black
- 11 - White
- 54 - Embossed matt white
- 75 - Grey



Girofix

10

65

11

54

75

Girofix 57 Fixed

Trim







Ø82

Girofix 87 Fixed

Trimless



Ø69



		Product Code	Light Source Codes	LED Power	Nominal Lumen	Beam Angle	Dimming Options	CCT Options
<div>CRI>90 3000K</div> <div>High Rendering</div>	Girofix 57 Fixed	RP28	MC31	6W	710 lm	16°/26°/36°	D0 No Dim	30 3000K
	Girofix 80 Fixed	RO90	MC22	10W	1276 lm	18°/24°/36°	DA Dali Dim	40 4000K
							DP Phase Dim	
							DC CASAMBI	
							D1 0-10V Dim	
<div>CRI 00</div> <div>Retrofit</div>	Girofix 57 Fixed	RP28	GU04	/	/	00	00 No Driver	00
	Girofix 80 Fixed	RO90	GU53					
			GU10					

Galaxis Pro

Recessed 140 | 160 | 200 | 230



Body

Round-shaped mounting trim in cast aluminum with springs for trim installation on a ceiling thickness of max. 25mm.

Luminaire body and heat dissipator for passive cooling in extruded aluminum.

Secondary reflector in highly reflective pure aluminum. Available in four different sizes.

Accessories

N/A

Finish

Powder coat in black (10), Embossed matt black (65), white (11), or Embossed matt white (54).

LED sources

COB LED.
CRI: 90 | CCT: 3000K, 4000K.
Other CRI and CCT options available on request.

Optic

Lens in PMMA + secondary reflector in aluminum.
Beam Angle: Wide.






Driver

Supplied with non-dimmable remote driver.
Dimming Options: 0-10V Dim, DALI, Phase, CASAMBI.
220-240V 50/60Hz.

Applications

Provides a visually comfortable, energy-efficient general lighting solution with uniform spread. Its IP44 rating makes it ideal for bathroom applications.
Application areas: offices, corridors, hospitals, hotels.

Galaxis Pro

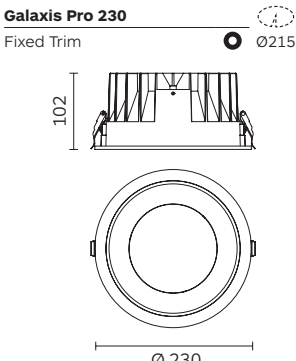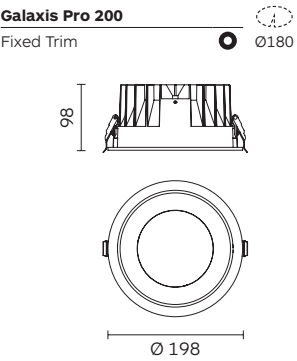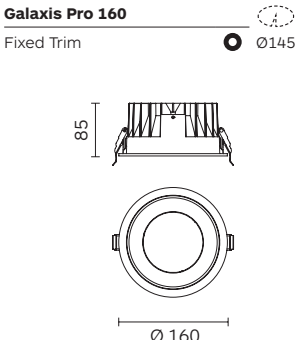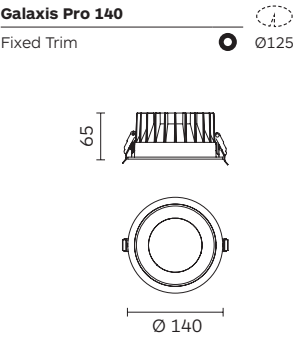

Code ordering example: **R K 1 7 B C 2 1 - 9 0 3 0 6 5 D 0 1 0**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Galaxis Pro 140 Fixed	RK17	BC21 COB LED	90	30 3000K	20W	2660 lm	65	D0 No Dim	10 Black
				40 4000K		2680 lm		DA Dali Dim	65 Matt Black
Galaxis Pro 160 Fixed	RK15				30W	3200 lm	75	DP Phase Dim	11 White
						3280 lm		DC CASAMBI	54 Matt White
Galaxis Pro 200 Fixed	RK13				39W	4300 lm	72	D1 0-10V Dim	
						4380 lm			
Galaxis Pro 230 Fixed	RK12				50W	5400 lm	75		
						5680 lm			

Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For the most updated product information, please go to our website.

Aqualuce

Recessed Round & Square



Body

Round-shaped mounting trim in cast aluminum with springs for trim installation on a ceiling thickness max. 20mm. Trim equipped with silicone water seal.

Independent light body in steel.

IP54 (protection against dust and water) fixture.

Easy relamping via removable front ring by snap-in catch action.

Accessories

N/A

Finish

Powder coat in black (10), Embossed matt black (65), white (11), or Embossed matt white (54).

LED sources

COB LED. Retrofit.
CRI: 90 | CCT: 3000K, 4000K.
Other CRI and CCT options available on request.

Optic

Diffuser.
Beam Angle: Wide.

Driver

Supplied with non-dimmable remote driver.
Dimming Options: 0-10V Dim, DALI, Phase, CASAMBI.
220-240V 50/60Hz.


Applications

An ideal lighting system for areas with water splashes or where condensation occurs.
Application areas: bathrooms, gyms, saunas, spas, residential, retail, under canopy areas.



Related Products



Aqualuce Round & Square

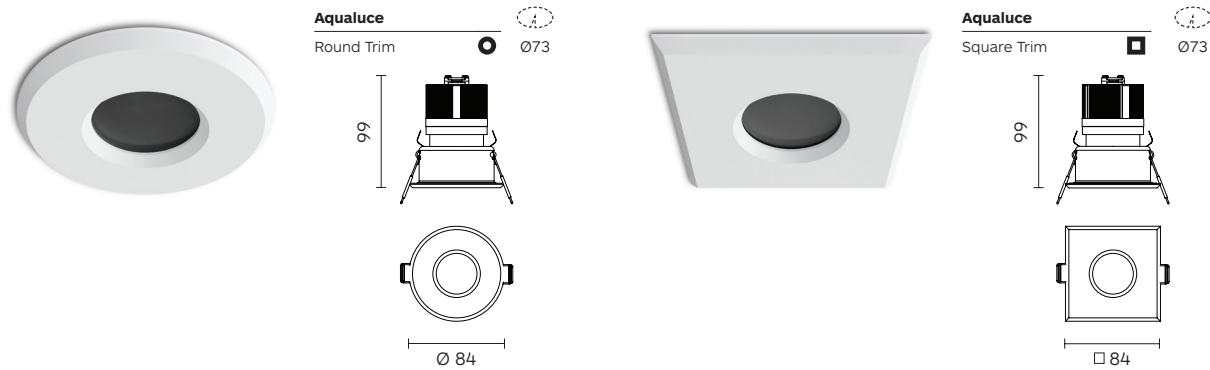

Bathroom Light Installation Guide *

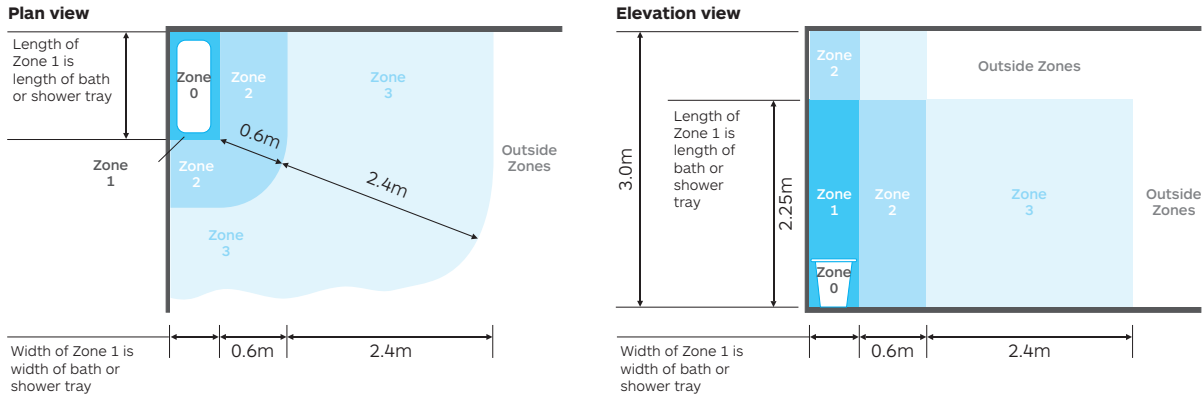




Code ordering example: **RE47MC22-903000D010**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Aqualuce Round	RE47	MC22 COB LED	90	30 3000K	10W	1350 lm	00	D0 No Dim	10 Black
				40 4000K		1510 lm		DA Dali Dim	65 Matt Black
Aqualuce Square	RE48							DP Phase Dim	11 White
								DC CASAMBI	54 Matt White
								D1 0-10V Dim	
	GU53 Retrofit	MR16-GU5.3	00	00	/	/	00	00 No Driver	
	GU10	GZ10-GU10							

Notes:

- * For complete code ordering information, please see pages 214-215.
 - ** For other CCT options, please contact us.
 - * Bathroom lights must be installed in accordance with IEE regulations, Forma's IP44 shower range can be installed in zones 1, 2, 3.
- For the most updated product information, please go to our website.






Optical Accessories






			
Product / Optical Accessories	Coloured Filters Colours 25, 42, 55, 85	Linear Spread Colour 41	Honeycomb Louvre Colour 10
Zero 40 Semi-Recessed	2E36	/	2E35
Zero 66 Semi-Recessed	2D63	/	2C65
Colosseo 75	2E37	/	2B76
Colosseo 90	2E38	/	2B95
Colosseo 120	2E39	/	2368
Solo	2E38	/	2B95
Zero In & Out 40	2E36[®]	/	2E35
Zero In & Out 66	2D63[®]	/	2C65
Lumi 50	/	/	2B76
Lumi 65	/	/	2B95

* With holder

For Downlight only. To be ordered separately.

Optical Accessories

					
Product / Optical Accessories	Coloured Filters Colours 25, 42, 55, 85	Linear Spread Colour 41	Honeycomb Louvre Colour 10	Anti-Glare Hood Colours 10, 65, 11, 17	Anti-Glare Tube Colours 10, 65, 11, 17
Iride 62	2614*	2615*	2504	/	/

					
Product / Optical Accessories	Coloured Filters Colours 25, 42, 55, 85	Linear Spread Colour 41	Honeycomb Louvre Colour 10	Protective Ring Recessed Colours 10, 65, 17	Protective Ring Colours 10, 65, 17
Occhio 65 Round	/	/	2B76	/	/
Occhio 87 Round	2614*	2615	2504	2D07	2D06

* With holder

For Downlight only. To be ordered separately.

Track Lighting

Zero Compasso

Track 40 | 66 | 100 | 130



Body

Track mounted spotlight, inclusive of integrated driver, with lighthouse in cast aluminum.

Available with 3 circuit universal track adapter or Dali track adapter.

Designed for passive cooling.

Available in four different sizes. Versatile aiming angle tiltable vertically 0°-90° and rotatable horizontally 350°.

Accessories

Coloured filters, linear spread, honeycomb louvre, anti-glare tube, wallwasher visor. Check page 116 for details.

Finish

Powder coat in black (10), Embossed matt black (65), white (11), or Embossed matt white (54).

LED sources

Light Source Options: High Power LED, COB LED. CRI: 90 | CCT: 3000K, 4000K. Other CRI and CCT options available on request.

Optic

Lens. Beam Angle: Super narrow (7°) / Narrow / Medium / Wide.

Driver

Inclusive of integrated non-dimmable driver. Dimming Options: DALI, 0-10V (Zero compasso 100, 130), On-board Dim, CASAMBI. 220-240V 50/60Hz.

Applications

A timeless, iconic, cylindrical spotlight design, incorporating the most advanced lighting technology with a minimalist aesthetic, to suit any interior lighting application. Application areas: retail, museums, hospitality, residential, offices, lobbies.

Related Products



- Zero Semi-Recessed
P.12
- Zero In & Out Recessed
P.36
- Zero Projector Track
P.100-103
- Zero Due Surface
P.136
- Zero Projector Surface
P.138-141
- Zero Pendant
P.158

Zero Compasso




Zero Compasso 40

Track




Zero Compasso 66

Track




Zero Compasso 100

Track



Zero Compasso 130

Track

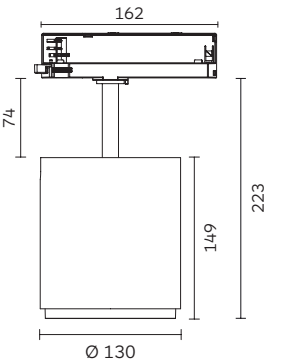

Code ordering example: **6 5 7 1 B R 2 1 - 9 0 3 0 0 7 D 0 1 0**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Zero Compasso 40 Track	6571	BR21 High Power LED	90	30 3000K 40 4000K	4W	439 lm	07	D0 No Dim	10 ■ Black
		BC31 COB LED			6W	705 lm	16 / 26 / 36	DA Dali Dim DC CASAMBI	65 ■ Matt Black 11 □ White
						770 lm		DN On-board Dimmer	54 □ Matt White
Zero Compasso 66 Track	6573	BR21 High Power LED			6W	574 lm	05		
		BC31 COB LED			11W	1160 lm	11 / 16 / 32		
						1258 lm			
Zero Compasso 100 Track	6575	BR21 High Power LED			18W	1947 lm	07	D0 No Dim	
		BC33 COB LED			21W	2569 lm	15 / 24 / 38	DA Dali Dim DC CASAMBI	
						2703 lm		D1 0-10V Dim	
Zero Compasso 130 Track	6577	BR21 High Power LED			27W	2920 lm	07	DN On-board Dimmer	
		BC33 COB LED				3230 lm			
					33W	3598 lm	12 / 22 / 32		

Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For related accessories, please see pages 116-117.
For the most updated product information, please go to our website.

Zero Compasso Wallwasher

Track 42 | 66 | 100



Body

Adjustable, Track mounted Wallwasher, with compact driver integrated in the track adapter, for installation on 3 circuit universal track with (or without) Data bus (DALI Track).

Extruded Aluminum body, Powder Coated. Designed for passive cooling. Available in three different sizes (Zero Compasso 42 Wallwasher, Zero Compasso 66 Wallwasher, Zero Compasso 100 Wallwasher). Versatile aiming angle tiltable vertically 0°-90° and rotatable horizontally 360°.

Wallwasher offers high illuminance uniformity and perfect visual comfort due to very good glare control.

Accessories

N/A

Finish

Powder coat in black (10), Embossed matt black (65), white (11), or Embossed matt white (54).

LED sources

Light source: COB LED. High Power LED.
CRI: 90 | CCT: 3000K, 4000K, White.
Other CRI and CCT options available on request.

Optic

PMMA Lens.
WW - wallwasher.

Driver

Inclusive of integrated non-dimmable driver.
Dimming Options: DALI, Phase, CASAMBI, on board dimmer.
220-240V 50/60Hz.

Applications

Wallwashing with high uniformity is suitable for illuminating artwork in gallery and museums, Vertical uniformity enables the wall to appear bright over the entire height creating a wide and distinguished spatial impression in entrance hall. Application areas: museums, galleries, retails, hospitality, lobbies.

Related Products

Polaris 20 Wallwasher
P.22

Espresso Wallwasher
P.64

Venus Wallwasher Round
P.75


Venus Wallwasher Square
P.76

Ola Compasso Wallwasher
P.104


Zero Compasso Wallwasher





Zero Compasso 42 Wallwasher



Zero Compasso 66 Wallwasher



Zero Compasso 100 Wallwasher



Code ordering example: **6 6 2 2 B R 2 1 - 9 0 3 0 WW D 0 1 0**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Zero Compasso 42 Wallwasher Track	6622	BR21 High Power LED	90	30 3000K	4W	439 lm	WW	D0 No Dim	10 ■ Black
				40 4000K		483 lm		DA Dali Dim	65 ■ Matt Black
Zero Compasso 66 Wallwasher Track	6619	BC22 COB LED			12W	1550 lm		DC CASAMBI	11 □ White
						1735 lm		DN On-board Dimmer	54 □ Matt White
Zero Compasso 100 Wallwasher Track	6618	BC33 COB LED			14W	1789 lm		D0 No Dim	
						1873 lm		DA Dali Dim	
								DC CASAMBI	
								D1 0-10V Dim	
								DN On-board Dimmer	

Notes:

* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For the most updated product information, please go to our website.


WW = Wallwasher

Zero Compasso 66 Wallwasher

Lighting Effects



Example of a wallwasher table				
Illuminances 1x (Wall)				
Angle of tilt (α)	10°			
Wall Height (m)	3			
Wall Width (m)	7			
Offset from Wall (m) y	1.00	1.25	1.50	1.50
Luminaire spacing (m) x	0.83	1.00	1.25	1.50
Illuminance (lx) Average	141	117	105	78
Illuminance (lx) Max	242	201	180	134

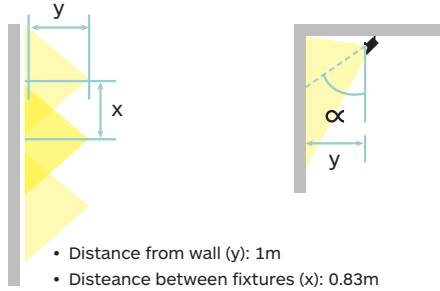

Luminaire spacing
The luminaire spacing (x) for some wallwashers can vary by up to 1.5 times the wall offset (y). Corresponding details are provided in the wallwasher table in catalog datasheets. Computerized beam calculations are recommended to check potential intersections with side walls.


Wallwasher angle of tilt
The lens wallwasher requires tilting. The product data sheet specifies the optimal tilt angle (α) for uniform light distribution on the wall.

Zero Compasso 100 Wallwasher

Lighting Effects



Example of a wallwasher table				
Illuminances 1x (Wall)				
Angle of tilt (α)	0°			
Wall Height (m)	4			
Wall Width (m)	7			
Offset from Wall (m) y	1.00	1.25	1.50	1.50
Luminaire spacing (m) x	1.00	1.25	1.50	1.50
Illuminance (lx) Average	126	105	93	70
Illuminance (lx) Max	223	186	165	124

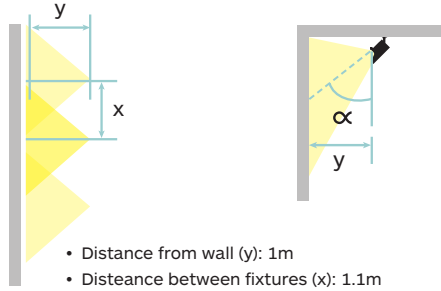

Luminaire spacing
The luminaire spacing (x) for some wallwashers can vary by up to 1.5 times the wall offset (y). Corresponding details are provided in the wallwasher table in catalog datasheets. Computerized beam calculations are recommended to check potential intersections with side walls.

Wallwasher angle of tilt
The lens wallwasher requires tilting. The product data sheet specifies the optimal tilt angle (α) for uniform light distribution on the wall.

Zero Due

Track 40 | 66 | 100 | 130



Body

Track mounted spotlight with lighthead and driver canopy in cast aluminum.

Available with 3 circuit universal track adapter or Dali track adapter.

Designed for passive cooling.

Available in four different sizes. Versatile aiming angle tiltable vertically 0°-90° and rotatable horizontally 350°.

Accessories

Coloured filters, linear spread, honeycomb louvre, visor, anti-glare tube, wallwasher visor. Check page 116 for details.

Finish

Powder coat in black (10), Embossed matt black (65), white (11), or Embossed matt white (54).

LED sources

Light Source Options: High Power LED, COB LED. CRI: 90 | CCT: 3000K, 4000K. Other CRI and CCT options available on request.

Optic

Reflector. Beam Angle: Super narrow (7°) / Narrow / Medium / Wide.

Driver


Inclusive of integrated non-dimmable driver. Dimming Options: DALI, 0-10V (Zero Due 100,130), Phase (Zero Due 100, 130), CASAMBI. 220-240V 50/60Hz.


Applications


A timeless, iconic, cylindrical spotlight design, incorporating the most advanced lighting technology with a minimalist aesthetic, to suit any interior lighting application. Application areas: retail, museums, hospitality, residential, offices, lobbies.


Related Products


- Zero Semi-Recessed
P.12



- Zero In & Out Recessed
P.36


- Zero Projector Track
P.100-103


- Zero Due Surface
P.136


- Zero Projector Surface
P.138-141


- Zero Pendant
P.158





Zero Due





Zero Due 40

Track

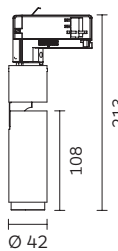



Zero Due 66

Track

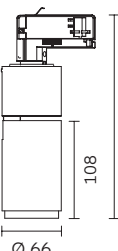



Zero Due 100

Track

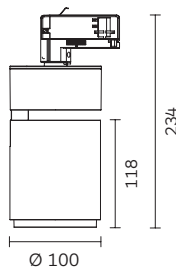

Zero Due 130

Track

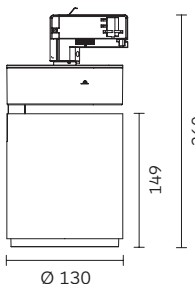



Code ordering example: 6 5 7 2 B R 2 1 - 9 0 3 0 0 7 D 0 1 0

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish			
Zero Due 40 Track	6572	BR21	High Power LED	90	30	3000K	4W	439 lm	07	D0	No Dim	10 ■ Black
					40	4000K		483 lm		DA	Dali Dim	65 ■ Matt Black
		BC31	COB LED			5W	460 lm	16 / 26 / 36	DC	CASAMBI	11 □ White	
Zero Due 66 Track	6574	BR21	High Power LED				6W	574 lm	05	D0	No Dim	
								636 lm		DA	Dali Dim	
		BC22	COB LED			11W	1160 lm	11 / 16 / 32	DC	CASAMBI		
Zero Due 100 Track	6576	BR21	High Power LED				18W	1947 lm	07	D0	No Dim	
								2153 lm		DA	Dali Dim	
		BC33	COB LED			21W	2569 lm	15 / 24 / 38	DP	Phase Dim		
Zero Due 130 Track	6578	BR21	High Power LED				27W	2920 lm	07	D1	0-10V Dim	
								3230 lm		DC	CASAMBI	
		BC33	COB LED			33W	3598 lm	12 / 22 / 32				
							3800 lm					

Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For related accessories, please see pages 116-117.
For the most updated product information, please go to our website.

Zero 38 Framing Projector

Track



- 10 - Black
- 65 - Embossed matt black
- 11 - White
- 54 - Embossed matt white

Advanced, multi-functional LED track mounted projector, tiltable vertically 0°-90° and rotatable horizontally 350°. With built-in bidirectional zooming lens with sharpness adjustability, and lens rotation.

Adjustable shutters to re-frame the beam to the desired size and shape (circle, square/rectangle, or irregular four-sided shapes). Compatible with Gobo insertion for logo.

High-precision optics for sharp outlines and high degree of lighting uniformity.

For complete code ordering information, please see pages 214-215.

LED Sources:

High Rendering:
CRI: 97 | CCT: 2700K, 3000K, 3500K, 4000K.

Accessories:

- Gobo Film, see page 117 for details
- Contact us for custom-made logo projection lens.

Zero Framing Projector

360°

90°

IP20



CE

10

65

11


54

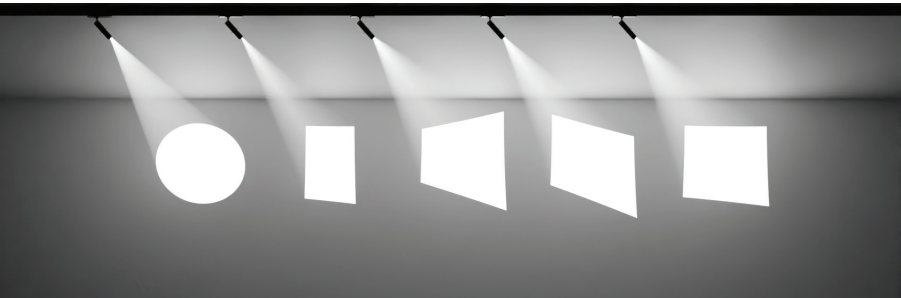

Recommended distance from fixture to wall between 0.5metres to 10metres.



Gobo Film logo projector lens.
Accessory Art. 2G24



		Product Code	Light Source Codes	LED Power	Nominal Lumen	Beam Angle	Dimming Options	CCT Options
<div>CRI>97 3000K High Rendering</div>	Zero Framing Projector 38	6643	BC42	9.6W	848 lm	BS (14°-35°)	<div>D0</div> No Dim	<div>27</div> 2700K
							<div>DA</div> Dali Dim	<div>30</div> 3000K
							<div>DC</div> CASAMBI	<div>35</div> 3500K
								<div>40</div> 4000K

Zero 85 Framing Projector

Track



- 10 - Black
- 65 - Embossed matt black
- 11 - White
- 54 - Embossed matt white

Advanced, multi-functional LED track mounted projector, tiltable vertically 0°-90° and rotatable horizontally 350°. With built-in bidirectional zooming lens with sharpness adjustability, and lens rotation.

Adjustable shutters to re-frame the beam to the desired size and shape (circle, square/rectangle, or irregular four-sided shapes). Compatible with Gobo insertion for logo.

High-precision optics for sharp outlines and high degree of lighting uniformity.

For complete code ordering information, please see pages 214-215.

LED Sources:

High Rendering:
CRI: 97 | CCT: 2700K, 3000K, 3500K, 4000K.

Accessories:

- Gobo Film, see page 117 for details
Contact us for custom-made logo projection lens.

Zero Framing Projector

360°

90°

IP20



CE

10

65


11

54

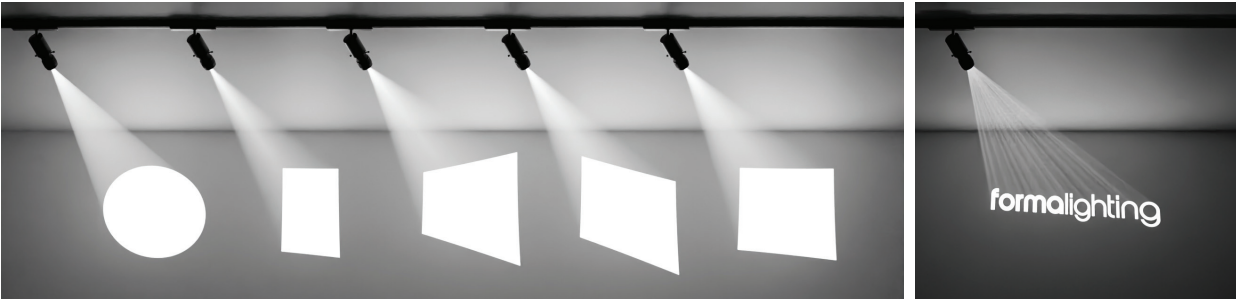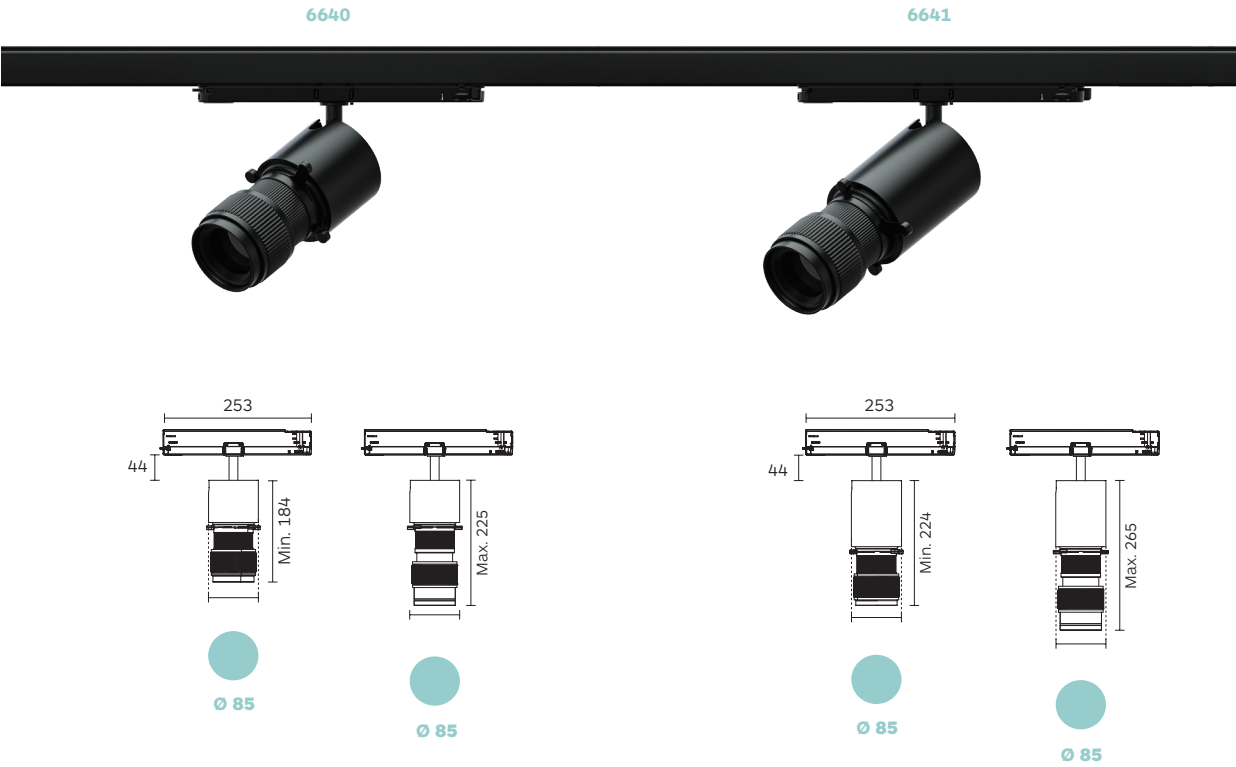

Recommended distance from fixture to wall between 0.5metres to 10metres.

Gobo Film logo projector lens.
Accessory Art. 2F29



		Product Code	Light Source Codes	LED Power	Nominal Lumen	Beam Angle	Dimming Options	CCT Options
<div>CRI>97 3000K</div> <div>High Rendering</div>	Zero Framing Projector 85	6640	BC32	17W	1764 lm	BS (13°-23°)	D0 No Dim	27 2700K
		6641		25W	2332 lm	BW (23°-36°)	DA Dali Dim	30 3000K
							DC CASAMBI	35 3500K
							DN On Board Dimmer	40 4000K

Ola Compasso

Track 55 | 100 | 130 | 100 Wallwasher | Ola Zoom 100



Body

Track mounted spotlight with light head and arm in cast aluminum. Available with a three-circuit universal track adapter or Dali track adapter. Light head designed for passive cooling.

Available in three different sizes and multiple optic options, Wallwasher version offers high illuminance uniformity and perfect visual comfort due to very good glare control.

Versatile aiming angle tiltable vertically 0°-90° in two directions and rotatable horizontally 350°.

Accessories

N/A

Finish

Powder coat in black (10), Embossed matt black (65), white (11), or Embossed matt white (54).

LED sources

Light source options: COB LED. High Power LED. CRI: 90 | CCT: 3000K, 4000K, White. Other CRI and CCT options available on request.

Optic

Lens. Beam Angle: Super narrow (7°) / Narrow / Medium / Wide / Wallwasher.

Driver

Track adaptor inclusive of integrated non-dimmable driver. Dimming Options: DALI, On-board Dim, CASAMBI. 220-240V 50/60Hz.

Applications

A chic, alluring, circular light head designed by formalighting's passionate engineers to elegantly integrate into architectural environment. Application areas: museums, galleries, retails, hospitality, lobbies.

Related Products


Zero Compasso
P.92



Rolo Track
P.114



Ola Compasso

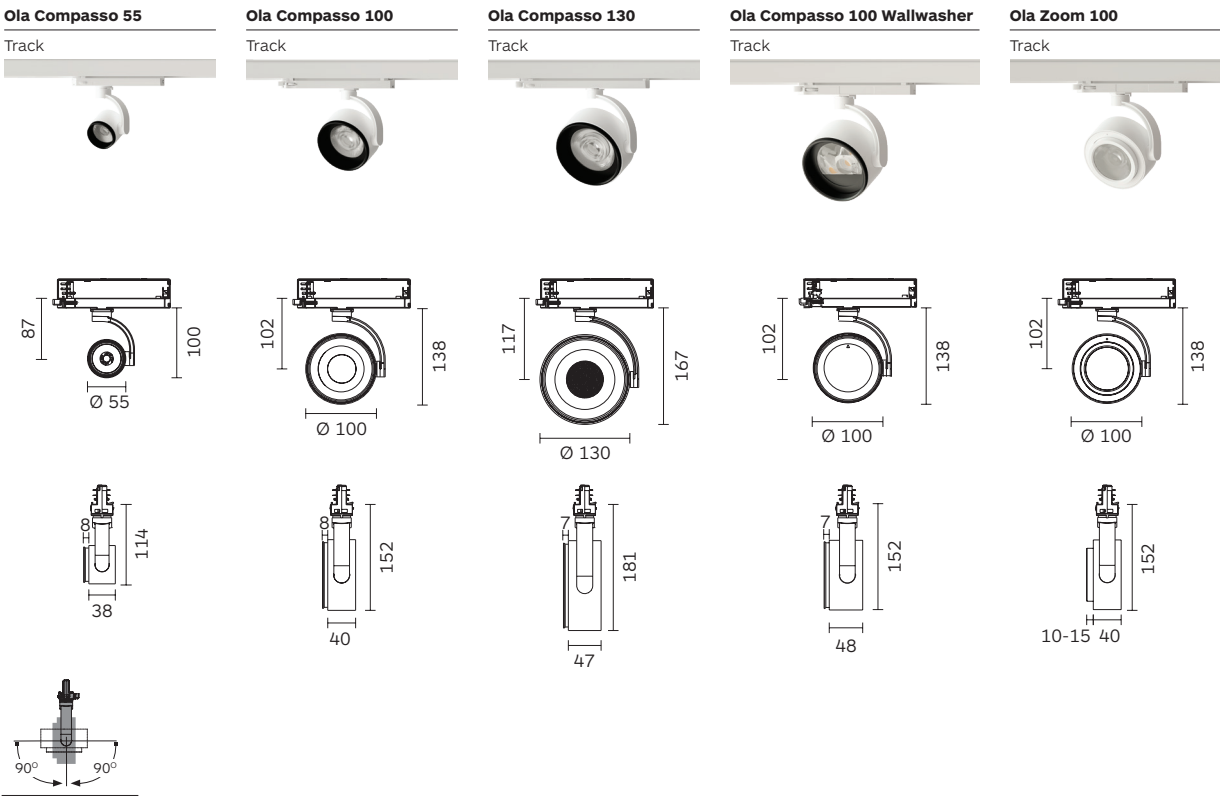

Code ordering example: **6 5 3 6 B R 2 1 - 9 0 3 0 0 7 D 0 1 0**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Ola Compasso 55 Track	6536	BR21 High Power LED	90	30 3000K 40 4000K	4W	400 lm	07	D0 No Dim	10 ■ Black 65 ■ Matt Black 11 □ White 54 □ Matt White
		BC22 COB LED			12W	1415 lm	18 / 24 / 36	DA Dali Dim DC CASAMBI DN On-board Dimmer	
						1437 lm			
Ola Compasso 100 Track	6533	BR21 4xHigh Power LED			16W	1640 lm	07		
		BC33 COB LED			17W	1930 lm	15 / 24 / 38		
						2041 lm			
Ola Compasso 130 Track	6534	BR21 6xHigh Power LED			20W	2320 lm	07		
		BR11 High Power LED			24W	2550 lm	17 / 25 / 46		
		BC33 COB LED			25W	2730 lm	12 / 22 / 32		
Ola Compasso 100 Wallwasher Track	6620	BC33 COB LED			14W	1789 lm	WW	D0 No Dim DA Dali Dim	
Ola Zoom 100 Track	6545	BC31 COB LED			11W	1160 lm	BS (10°-35°)	DC CASAMBI D1 0-10V Dim DN On-board Dimmer	

Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
BS: Beam shaping, Beam Angle:10°-35°.
WW = Wallwasher
For the most updated product information, please go to our website.

Pixo



Body

Pendant track mounted luminaire with the cylindrical light body in extruded aluminum. Light Body is available in two diameters (36mm and 77mm) with exchangeable front ring, offered in a wide range of colours.

Supplied with 3 phase track mounting and pre-installed 1.5m electrical cable and with 1.5m pendant steel wires, available in two sizes and four different lengths.

LED sources

Light source options: COB LED.
CRI: 90 | CCT: 3000K, 4000K, Tuneable white.
Other CRI, CCT and Tuneable white options are available on request.

Optic

Reflector.
Beam Angle: Narrow / Medium / Wide.




Driver

Supplied with Non-dimmable remote driver.
Dimming Options: 0-10V Dim, DALI, Phase, On-board Dim, CASAMBI.
220-240V 50/60Hz.

Applications

A cylindrical, minimalist pendant luminaire offering ambient light, designed to blur the line between architectural and decorative, with its numerous accessories.
Application areas, residential, hotels, restaurants, retails and corridors.

Related Products




Accessories

Decorative front rings available in different colours.
Transparent acrylic decorative diffuser.
Check page 117 for details.

Finish

Powder Coat in black (10), Embossed matt black (65), white (11), or Embossed matt white (54).

Pixo 25

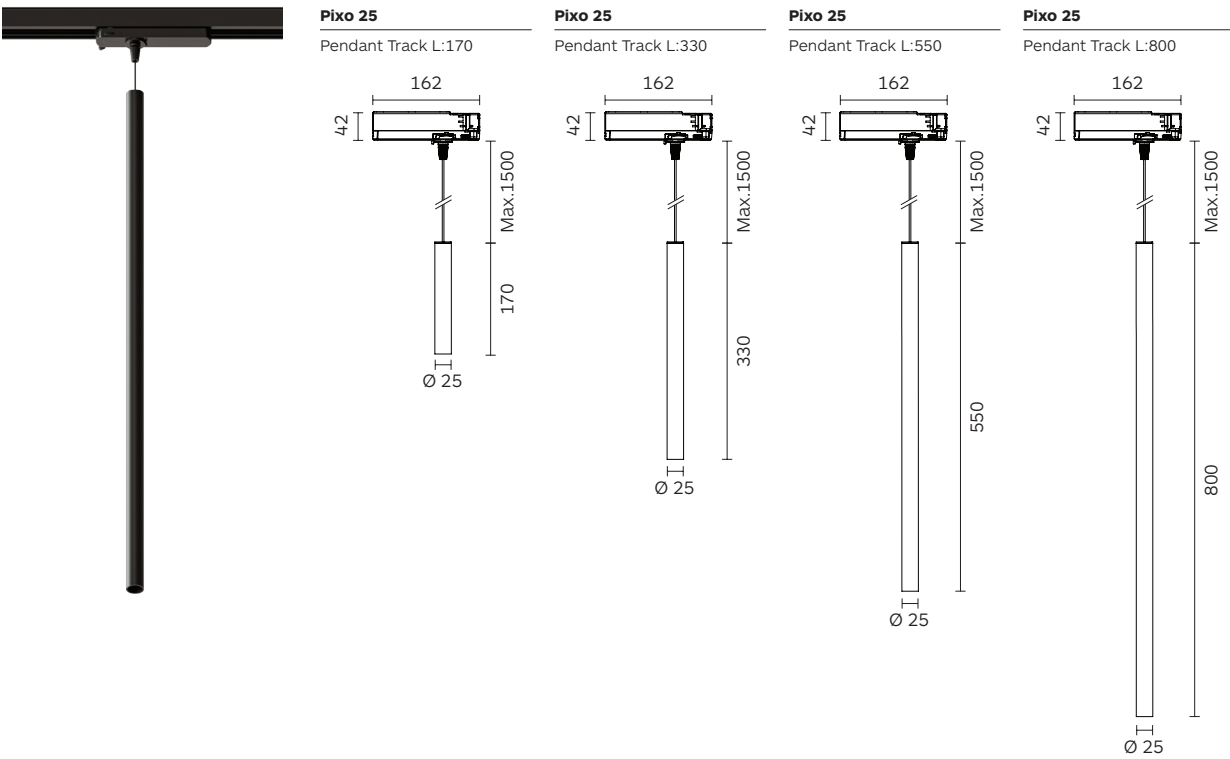


Code ordering example: **6 5 9 6 B R 2 1 - 9 0 3 0 1 5 D 0 1 0**

	Product Code	Product Length	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Pixo 25 Pendant Track	6596	170	BR21 High Power LED	90	30 3000K	2.8W	333 lm	15 / 20 / 32	D0 No Dim	10 ■ Black
	6597	330			40 4000K		365 lm		DA Dali Dim	65 ■ Matt Black
	6598	550							DC CASAMBI	11 □ White
	6599	800							DN On-board Dimmer	54 □ Matt White

Notes:

* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For the most updated product information, please go to our website.

Pixo 36

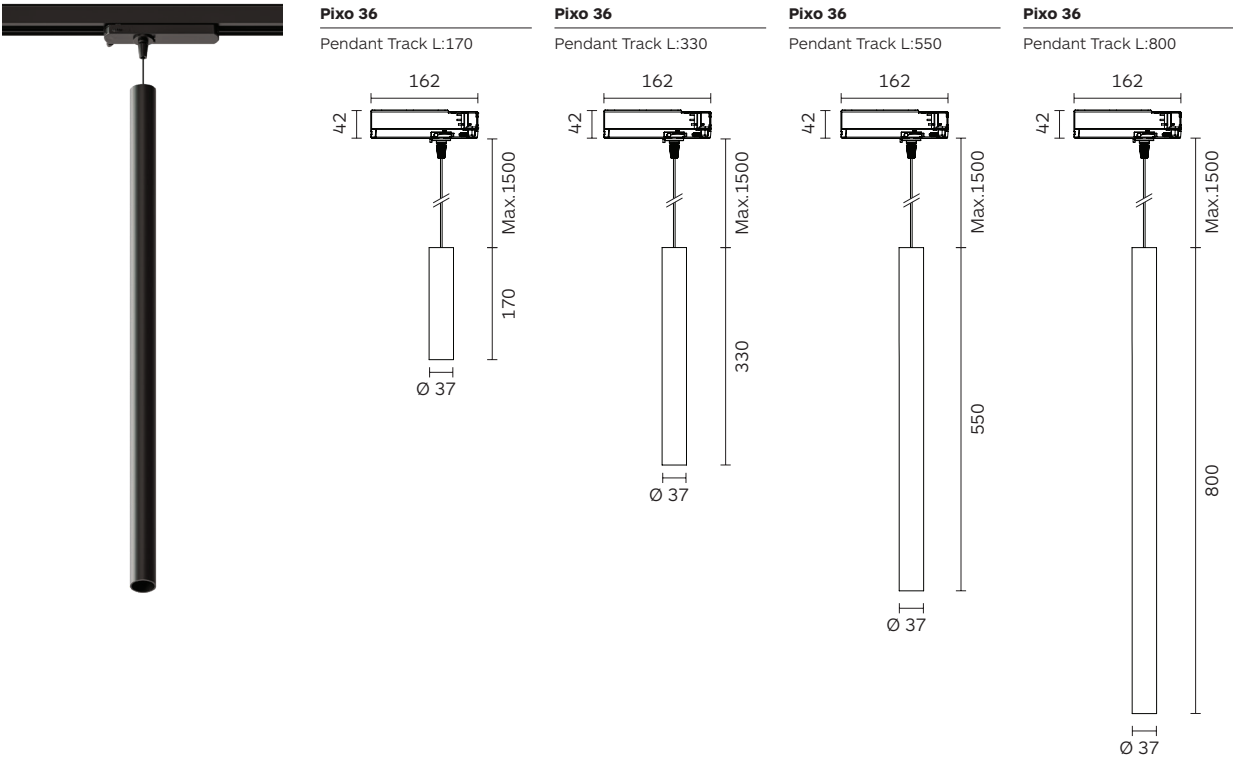


Code ordering example:

6	6	0	0	B	C	3	1	-	9	0	3	0	2	0	D	0	1	0
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

	Product Code	Product Length	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Pixo 36 Pendant Track	6600	170	BC31 COB LED	90	30	3000K	5W	500 lm	D0 No Dim	10 ■ Black
	6601	330			40	4000K		550 lm	DP Phase Dim	65 ■ Matt Black
	6602	550							DC CASAMBI	11 □ White
	6603	800							D1 0-10V Dim	54 □ Matt White

Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For related accessories, please see pages 116-117.
For the most updated product information, please go to our website.

Pixo 77

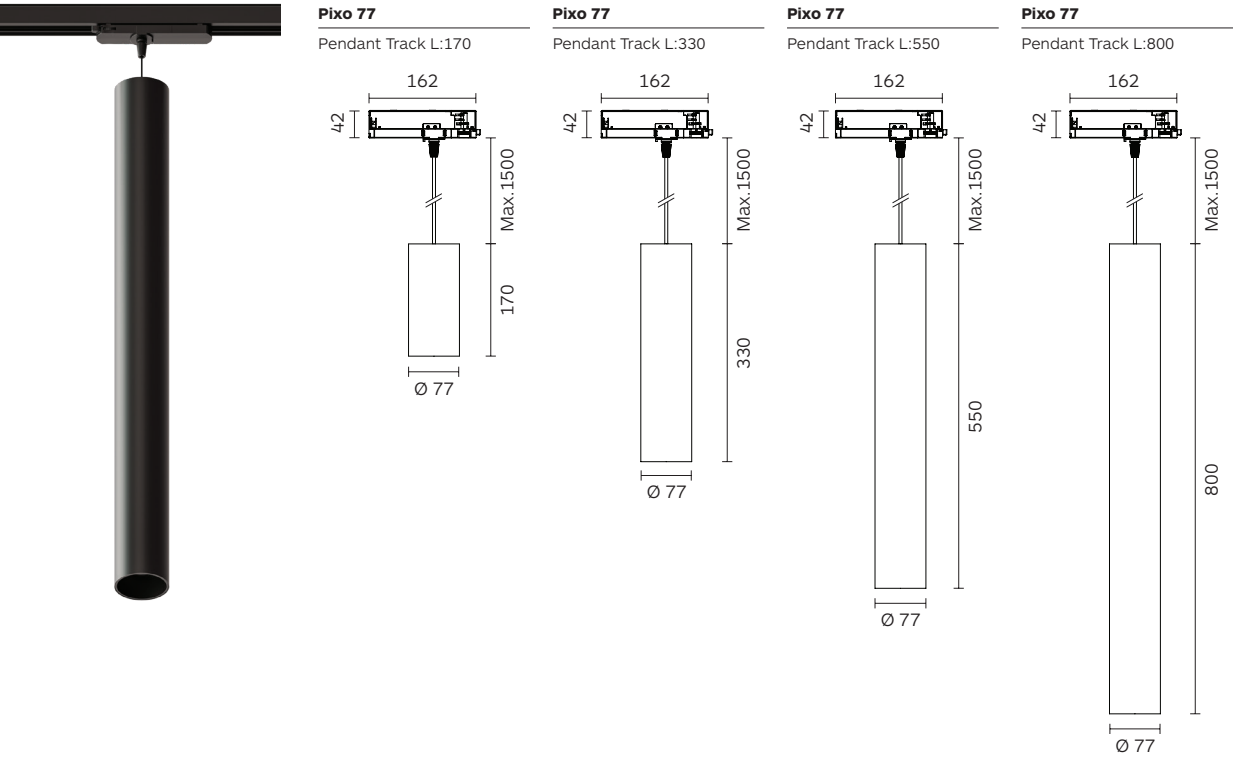

Code ordering example:

6	6	0	4	B	C	2	2	-	9	0	3	0	1	2	D	0	1	0
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

	Product Code	Product Length	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Pixo 77 Pendant Track	6604	170	BC22 COB LED	90	30	3000K	12W	1570 lm	D0 No Dim	10 ■ Black
	6605	330			40	4000K		1600 lm	DP Phase Dim	65 ■ Matt Black
	6606	550							DC CASAMBI	11 □ White
	6607	800							D1 0-10V Dim	54 □ Matt White

Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For related accessories, please see pages 116-117.
For the most updated product information, please go to our website.

Lucciole



Body

The elegant LUCCIOLE represent a re-invention of a Forma Lighting classic. Our designers gave the much-loved luminaire a transformative aesthetic with updated lighting technology. Made of the most beautiful Italian glass, combining laser cut edges, resulting in a smooth uniform glow from the powerful LED source.

It is available in three different designs and multiple mounting options including wall, ceiling, pendant and track-mounted.

Accessories

N/A

Finish

Decorative Black (10), Embossed matt black (65), white (11), Embossed matt white (54), Chrome (27), Bronze (30), Copper (35) or Brass (40).

LED sources

Light source options: Bridgelux - Vesta Series Dim to Warm LED COB.
CRI: 90 | CCT: 3000K – 1800K
COB LED 6.5W.
Other CCT options: 2700K, 3000K, 3500K, 4000K on request.

Optic

PMMA, laser faceted acrylic, non-toxic, non-harmful. Frosted PMMA ornament disperse light in a soft and wide beam, the clear finishing maximizes its lighting transmittance.

Driver

Integrated driver 220-240VAC 50/60Hz.
Dimming Options: DALI, On-board Dim, CASAMBI.

Applications

A multi-faceted lighting system, that offers a play between forms and elegant lighting effects. LUCCIOLE are well appreciated in environments requiring functional lighting with a soft decorative element.
Application areas: residential, hotels, restaurants, retail, corridors.

Related Products


Lucciole Ceiling
P.128



Lucciole Wall
P.130



Lucciole Pendant
P.156




Lucciole



Lucciole Pendant




7287

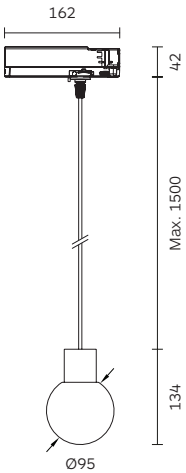

Lucciole Pendant




7288

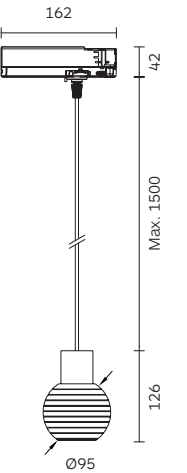

Lucciole Pendant



7289

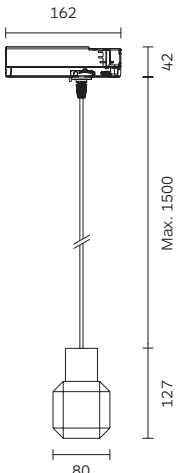

Code ordering example: **7 2 8 7 B B 3 2 - 9 0 DW 0 0 DA 1 0**


	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Lucciole Pendant Track	7287	BB32	COB LED	90	DW from 3000K to 1800K	6.5W	724 lm	00	10 ■ Black
Lucciole Pendant Track	7288							DC CASAMBI	65 ■ Matt Black
Lucciole Pendant Track	7289							DN On-board Dimmer	11 □ White
									54 □ Matt White
									27 ■ Chrome
									30 ■ Bronze
									35 ■ Copper
									40 ■ Brass

Notes:

* For complete code ordering information, please see pages 214-215.
** Other CCT options 2700K, 3000K, 3500K, 4000K on request.
For the most updated product information, please go to our website.

Polaris

Designed by Franco Mirenzi (Registered)

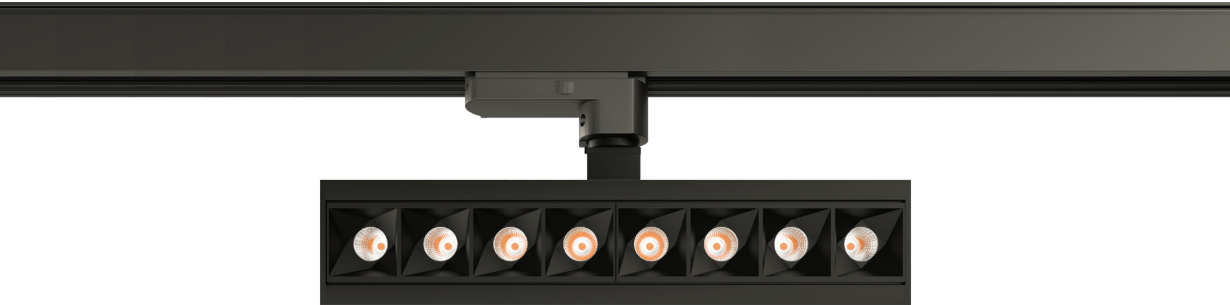

Body

Track mounted spotlight with light body in cast aluminum inclusive of Integrated diamond faceted no-dazzle screen in thermoplastic.

Available with 3 circuit universal track adapter or Dali track adapter.

Luminaire body in cast aluminum with integrated diamond faceted screen made from thermoplastic.

Versatile aiming angle tiltable vertically 0°-90° in two directions and rotatable horizontally 350°.

Accessories

N/A

Finish

Powder coat in black (10), Embossed matt black (65), white (11), or Embossed matt white (54) colour. Option for either white or black integrated thermoplastic screen.

LED sources

Light source options: High Power LED. CRI: 90 | CCT: 3000K, 4000K. Other CRI, CCT and Tuneable White options available on request.

Optic

Lens plus thermoplastic screen. UGR < 16.

Driver

Inclusive of integrated non-dimmable driver. Dimming Options: DALI, Phase, CASAMBI. 220-240V 50/60Hz.

Applications

An innovative solution for high performance, uniform illumination with optimal visual comfort. The miniature light heads and optics in the fixture create a high definition, glare-controlled, circular light emission. Application areas: residential, hotels, restaurants, retail, corridors.

Related Products

Polaris Recessed Series
P.16-21

Polaris Wallwasher Series
P.22-25

Polaris Surface
P.134

Polaris Pendant
P.160

Polaris 30



Polaris 30
Track with 4 LEDs

Polaris 30
Track with 8 LEDs

Polaris 30
Track with 12 LEDs



Code ordering example: **6 4 8 0 B 0 1 1 - 9 0 3 0 3 4 D 0 0 1**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Polaris 30 4 LEDs	6480	B011 High Power LED	90	30 3000K	4x2W	760 lm	34 / 50	D0 No Dim	01 ▣ W/B
				40 4000K		960 lm		DA Dali Dim	10 ■ Black
Polaris 30 8 LEDs	6481				8x2W	1520 lm		DP Phase Dim	65 ■ Matt Black
						1920 lm		DC CASAMBI	11 □ White
Polaris 30 12 LEDs	6482				12x2W	2280 lm			54 □ Matt White
						2880 lm			17 ▣ B/W

Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
01: Black light body with white integrated louvre. **17:** White light body with black integrated louvre.
For the most updated product information, please go to our website.

Rolo

Rolo designed by Simon Fisher

Track mounted round spotlight with light-head and driver box in cast aluminum. Available with 3 phase Euro track adapter.

Easy relamping by the removable lamp front ring via simple snap-in catch action. Versatile aiming angle tiltable vertically 0°-90° and rotatable horizontally 350°.

For complete code ordering information, please see pages 214-215.

LED Sources:

High Rendering:
CRI: 90 | CCT: 3000K, 4000K.

Retrofit
GU10

- 10 - Black
- 65 - Embossed matt black
- 11 - White
- 54 - Embossed matt white
- 75 - Grey



Rolo

350°

90°/90°

IP20

CE



10

65

11






54

75










CRI>90 3000K High Rendering	Rolo Track	Product Code	Light Source Codes	LED Power	Nominal Lumen	Beam Angle	Dimming Options		CCT Options	
		6288	BR21 BC31	4W 11W	400 lm 1080 lm	07° 11°/16°/32°	D0 DA DP DC D1	No Dim Dali Dim Phase Dim CASAMBI 0-10V Dim	30 40	3000K 4000K
CRI 00 Retrofit			GU10	/	/	00	DP	Phase Dim	00	

Optical Accessories


					
Product / Optical Accessories	Coloured Filters Colours 25, 42, 55, 85	Linear Spread Colour 41	Honeycomb Louvre Colour 10	Wallwasher Visor Colours 10, 65, 17	Anti-glare Tube Colours 10, 65, 17
Zero Compasso 40 Track	2E36	2E44	2E35	/	2E43
Zero Due 40 Track					
Zero Compasso 66 Track					
Zero Due 66 Track	2D63*	2D62*	2C65	2D94	2D67
Zero Compasso 100 Track BC33	2E10*	2E12*	2C66	2E14	2E16
Zero Due 100 Track BC33					
Zero Compasso 100 Track BR21	/	/	2C70	/	/
Zero Due 100 Track BR21					
Zero Compasso 130 Track BC33	2E11*	2E13*	2C67	2E15	2E17
Zero Due 130 Track BC33					
Zero Compasso 130 Track BR21	/	/	2E45	/	/
Zero Due 130 Track BR21					
* With holder					

Optical Accessories


					
Product / Optical Accessories	Honeycomb Louvre Colour 10	Acrylic diffuser	Colour Ring Colour 33	Colour Ring Colour 35	Colour Ring Colour 55
Pixo 36 Pendant Track	/	2E05	2E07	2E07	2E07
Pixo 77 Pendant Track	2E09	2E06	2E08	2E08	2E08
					
Product / Optical Accessories	Gobo film Colour 10	Gobo film Colour 10			
Zero Framing Projector 35 Track	2G24	/			
Zero Framing Projector 85 Track	/	2F29			

Eurotype Track System with Dali Bus


Surface Mounted Track & Flanged Recessed Track

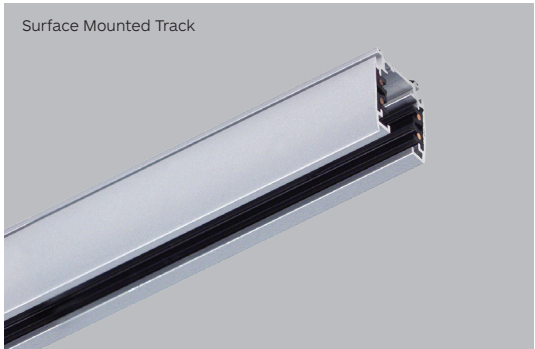

Product Code	Length (L)
2D65	1m
2D65	2m
2D65	3m



Product Code	Length (L)
2D66	1m
2D66	2m
2D66	3m



- Finish
- 10 ■ Black
 - 65 ■ Matt Black
 - 11 □ White
 - 54 □ Matt White
 - 75 ■ Grey

Notes: Connection to the 220-250V single-phase mains: 16A overall load, corresponding to 3500/4000 VA over the three circuits.

Features

Three circuit main-voltage track system with Data Bus.

Track in extruded aluminum fitted with four 16A rolled copper conductors and 2 conductors for Data signal housed in extruded insulated black thermoplastic.


Equipped with three separately controllable current circuit.

Completed of a vast range of accessories to fit to the needs of any specific project.




- The drawing is Reflected Ceiling View.
- Directive Lug on the back of connectors.

Reference Diagram for Choice of Connectors (Surface Mounted Track)

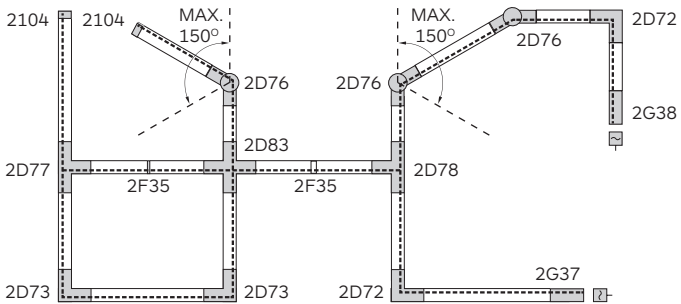


Reference Diagram for Choice of Connectors (Flanged Recessed Track)

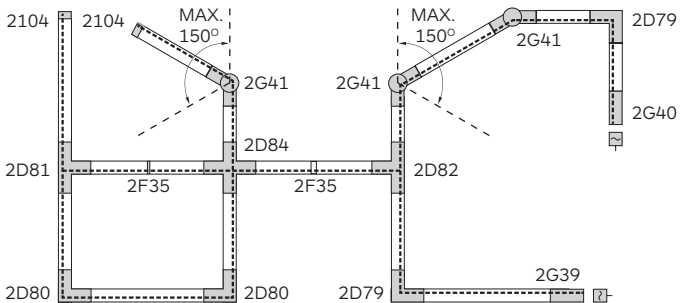

Installation Components

	2105*	Mechanical Coupler
	2106*	Ceiling Bracket

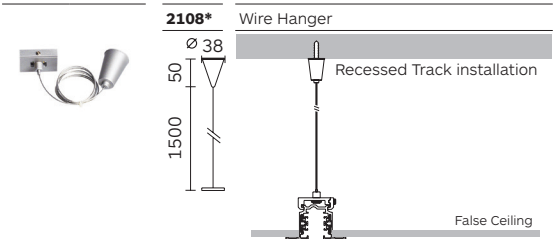

Accessories

	2G37**	Feeder (Right) for Surface track
	2G38**	Feeder (Left) for Surface track
	2D72**	L Connector (Right) for Surface track
	2D73**	L Connector (Left) for Surface track
	2D77**	T Connector (Right) for Surface track
	2D78**	T Connector (Left) for Surface track
	2G39**	Feeder (Right) for Recessed track
	2G40**	Feeder (Left) for Recessed track
	2D79**	L Connector (Right) for Recessed track
	2D80**	L Connector (Left) for Recessed track
	2D81**	T Connector (Right) for Recessed track
	2D82**	T Connector (Left) for Recessed track

	2D76**	Flexible Connector for Surface track
	2G41**	Flexible Connector for Recessed track
	2D83**	X Connector for Surface track
	2D84**	X Connector for Recessed track
	2F35**	Concealed Connector
	2104**	End Cap

- Notes:**
- * Available in colours 10, 65, 11, 54 & 75.
 - ** Available in colours 10, 65, 11 & 54.

Eurotype Track System

Surface Mounted Track & Flanged Recessed Track



Product Code	Length (L)		Product Code	Length (L)		Finish
2089	1m		2092	1m		10 Black
2090	2m		2093	2m		65 Matt Black
2091	3m		2094	3m		11 White
						54 Matt White
						75 Grey

Notes: Connection to the 220-250V single-phase mains: 16A overall load, corresponding to 3500/4000 VA over the three circuits.


Features

Three circuit main-voltage track system.

Track in extruded aluminum fitted with four 16A rolled copper conductors housed in extruded insulated black thermoplastic.

Equipped with three separately controllable current circuit.


Completed of a vast range of accessories to fit to the needs of any specific project.




Directive Lug

- The drawing is Reflected Ceiling View.
- Directive Lug on the back of connectors.

Reference Diagram for Choice of Connectors (Surface Mounted Track)

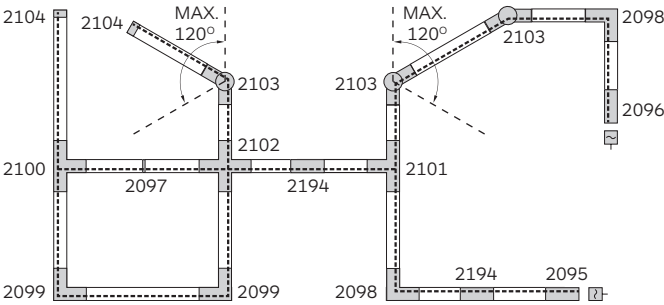

Reference Diagram for Choice of Connectors (Flanged Recessed Track)

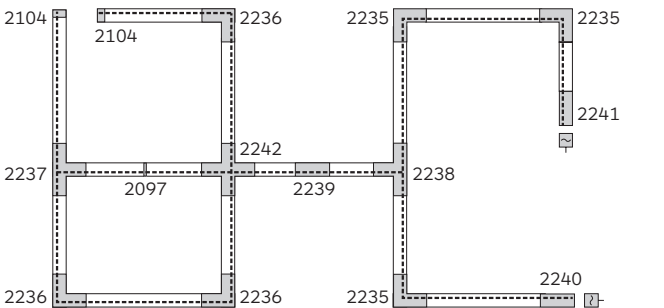

Installation Components


	2105*	Mechanical Coupler
	2106*	Ceiling Bracket

Couplings

	2095**	Feeder (Right) for Surface track
	2096**	Feeder (Left) for Surface track
	2098**	L Connector (Right) for Surface track
	2099**	L Connector (Left) for Surface track
	2100**	T Connector (Right) for Surface track
	2101**	T Connector (Left) for Surface track
	2240**	Feeder (Right) for Recessed track
	2241**	Feeder (Left) for Recessed track
	2235**	L Connector (Right) for Recessed track
	2236**	L Connector (Left) for Recessed track
	2237**	T Connector (Right) for Recessed track
	2238**	T Connector (Left) for Recessed track
	2049**	Ceiling base

Notes:

- * Available in colours 10, 65, 11, 54 & 75.
- ** Available in colours 10, 65, 11 & 54.

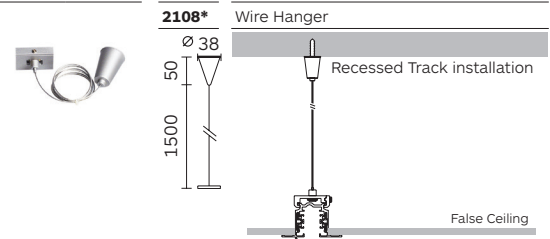

	2194**	Straight Connector for Surface track
	2103**	Flexible Connector for Surface track
	2102**	X Connector for Surface track
	2239**	Straight Connector for Recessed track
	2242**	X Connector for Recessed track
	2097**	Concealed Connector
	2104**	End Cap

Surface Lighting

Spotify

Adjustable Surface 77 | 95



Body

Cylindrical, modular design, ceiling mounted fixture, incorporated adjustable LED module, available in 2 versions.

Spotify Surface-mounted minimal design provides an aesthetic architectural feature together with excellent photometric properties, integrated driver which is a perfect solution for spaces without false ceiling.

The adjustable LED module together with the future-proof modular design enables full flexibility easy installation and effortless maintenance.

Accessories

Tool-free interchangeable Honeycomb louvre, Linear Spread, Concave Trim.
Check page 125 for details.

Finish

Powder coat in black (10), Embossed matt black (65), white (11), or Embossed matt white (54).

LED sources

Light source options:
High efficacy.
CRI: 90 | CCT: 2700K, 3000K, 3500K, 4000K.
Other CRI and CCT options available on request.

Optic

High grade PMMA Lenses.
Beam angle: Narrow / Medium / Wide.




Driver

Integrated driver included.
Dimming options: 0-10V, DALI, Phase, Casambi.
220-240V 50/60Hz.


Applications

Ceiling mounted luminaires with simple design used to provide ambient or accent lighting. Ideal to be installed in concrete ceiling or restricted voids.
Application areas: High-end residential, retail, hospitality, lobbies, corridors.

Related Products



Spotify Surface Adjustable

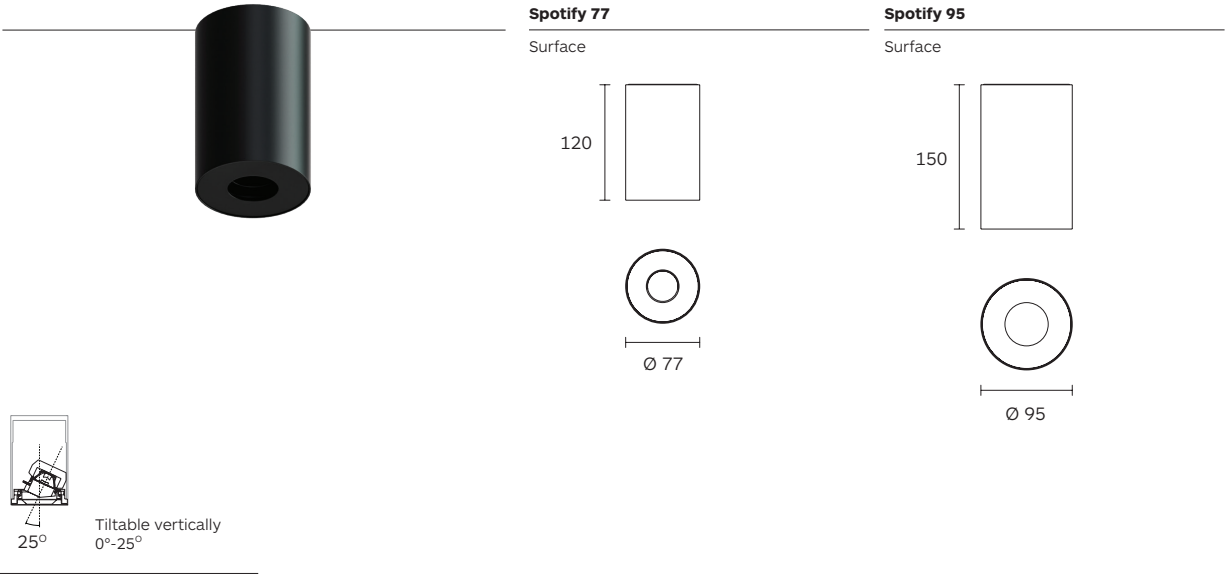

Code ordering example: **1 4 7 9 M C 3 6 - 9 0 2 7 2 0 D 0 1 0**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Spotify 77 Surface	1479	MC36	High efficacy	90	27 2700K	5W	654 lm	D0 No Dim DA Dali Dim DP Phase Dim DC CASAMBI	10 ■ Black
					30 3000K		691 lm		65 ■ Matt Black
					35 3500K		723 lm		11 □ White
					40 4000K		738 lm		54 □ Matt White
Spotify 95 Surface	1478					9W	1043 lm 1101 lm 1152 lm 1176 lm	D1 0-10V Dim	

Optical Accessories

Product / Optical Accessories	Honeycomb Louvre Colours 10, 65, 11, 17	Linear Spread Colours 10, 65, 11, 17	Concave Trim Colours 10, 65, 11, 17
Spotify 77 Surface	2F54	2F55	2F56
Spotify 95 Surface	2F57	2F58	2F59

Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For the most updated product information, please go to our website.

Pixo

Surface 36 | 77



Body

Ceiling mounted luminaire with light body in extruded aluminum.

Light body available in two diameters (36mm and 77mm) and three different lengths.

Exchangable front ring in wide range of colours.

Accessories

Decorative front ring available in different colours, Acrylic decorative diffuser, Honeycomb louvre. Check page 146 for details.

Finish

Powder coat in black (10), Embossed matt black (65), white (11), or Embossed matt white (54). Exchangable front ring available in different colours.

LED sources

COB LED.
CRI: 90 | CCT: 3000K, 4000K.
Other CRI and CCT options available on request.

Optic

Lens.
Beam Angle: Narrow / Medium / Wide.



Driver

Supplied with integrated non-dimmable driver.
Dimming Options (Pixo 77): 0-10V Dim, DALI, Phase, CASAMBI.
220-240V 50/60Hz.


Applications

A cylindrical, minimalist pendant luminaire offering ambient light, designed to blur the line between architectural and decorative when accessorized or grouped with its various sizes.
Application areas: residential, hotels, restaurants, retail, corridors.

Related Products



Pixo

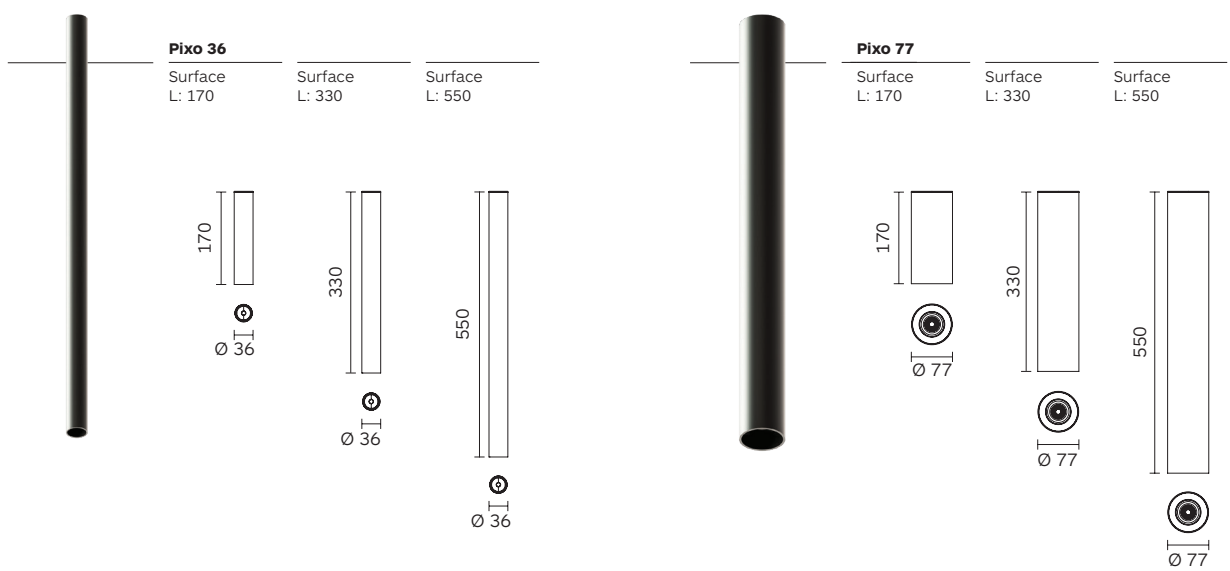

Code ordering example: **1 3 8 7 B C 3 1 - 9 0 3 0 2 0 D 0 1 0**

	Product Code	Product Length	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Pixo 36 Surface	1387	170	BC31 COB LED	90	30 3000K	5W	500 lm	20 / 26 / 36	D0 No Dim	10 ■ Black
	1389	330					550 lm			65 ■ Matt Black
	1391	550								11 □ White
Pixo 77 Surface	1388	170	BC22 COB LED			12W	1570 lm	12 / 20 / 32	D0 No Dim	54 □ Matt White
							1600 lm			
	1390	330							DP Phase Dim	
	1392	550							DC CASAMBI	
									D1 0-10V Dim	
									D0 No Dim	
									DP Phase Dim	
									DC CASAMBI	
									D1 0-10V Dim	
									DA Dali Dim	

Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For related accessories, please see pages 146-147.
For the most updated product information, please go to our website.

Lucciole

Ceiling



Body

A delicate & striking ceiling mounted-lighting with subtle light effect. The traditional yet modern Italian-style sophisticated glass lamps are wall-mounted by a round chrome-plated fixture body of 95mm diameter. The chrome-plated fixture body and the use of non-toxic acrylic glass in a lamp adds to its decorative appeal while also ensuring its durability.

Inspired by Firefly's ability of natural glow, it features a lamp's body of various shapes, sizes, and designs. A very eco-friendly and 100% recyclable lamp with diffuse light distribution.

Accessories

N/A

Finish

Decorative Black (10), Embossed matt black (65), white (11), Embossed matt white (54), Chrome (27), Bronze (30), Copper (35) or Brass (40).

LED sources

Light source options: Bridgelux - Vesta Series Dim to Warm LED COB.
CRI: 90 | CCT: 3000K – 1800K
COB LED 6.5W.
Other CCT options: 2700K, 3000K, 3500K, 4000K on request.

Optic

Acrylic glass, non-toxic, non-harmful.
More light and transparent than glass.




Driver

It is supplied with an integrated non-dimmable driver.
Dimming Options: Phase, CASAMBI.



Applications

Lucciole's elegant and subtle lighting effects make these ceiling luminaires appear as delicate jewels in their environments.
Application areas: residential, hotels, restaurants, retail, corridors.

Related Products



Lucciole Ceiling

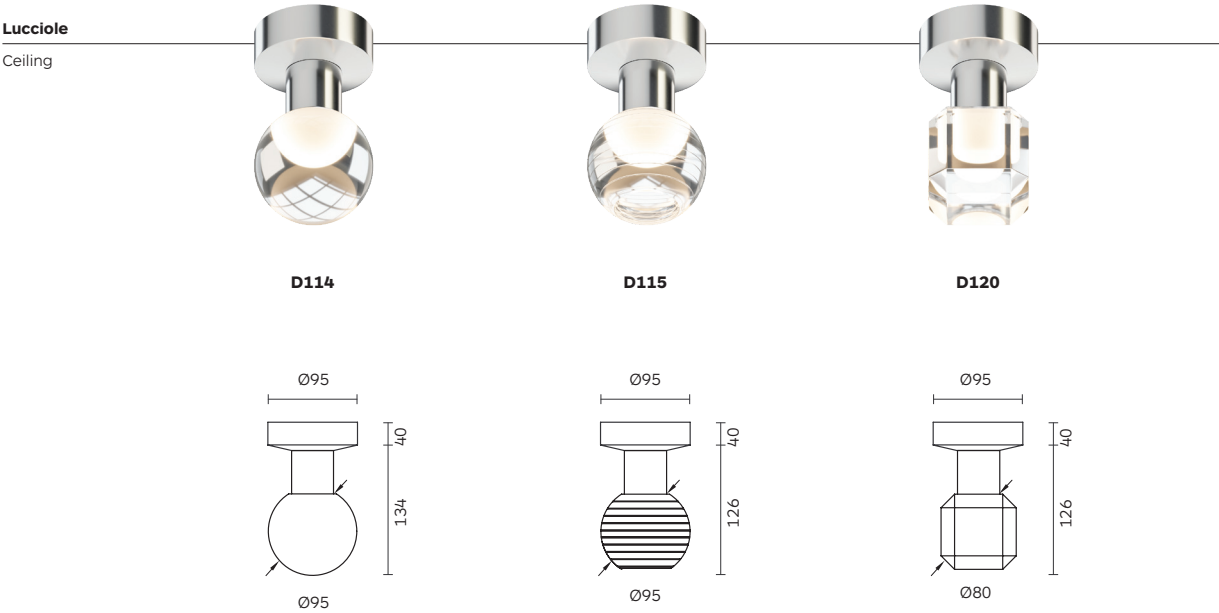

Code ordering example: **D 1 1 4 B B 3 2 - 9 0 DW 0 0 D P 1 0**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Lucciole Ceiling	D114	BB32 COB LED	90	DW from 3000K to 1800K	6.5W	724 lm	00	DP Phase Dim DC CASAMBI	10 ■ Black 65 ■ Matt Black
Lucciole Ceiling	D115								11 □ White 54 □ Matt White
Lucciole Ceiling	D120								27 ■ Chrome 30 ■ Bronze 35 ■ Copper 40 ■ Brass

Notes:
* For complete code ordering information, please see pages 214-215.
** Other CCT options 2700K, 3000K, 3500K, 4000K on request.
For the most updated product information, please go to our website.

Lucciole

Wall Mounted



Body

Wall mount uplight that indirectly bounces light back into your environment, the Lucciole wall lighting series is a blend of beauty and elegance. An L-shaped fixture body of 95×160mm connects the lamp to the wall.

The chrome-plated fixture body and the use of non-toxic acrylic glass in a lamp adds to its decorative appeal while also ensuring its durability.

Inspired by Firefly's ability of natural glow, it features a lamp's body of various shapes, sizes and designs. A very eco-friendly and 100% recyclable lighting with diffuse light distribution.

Accessories

N/A

Finish

Decorative Black (10), Embossed matt black (65), white (11), Embossed matt white (54), Chrome (27), Bronze (30), Copper (35) or Brass (40).

LED sources

Light source options: Bridgelux - Vesta Series Dim to Warm LED COB.
CRI: 90 | CCT: 3000K – 1800K
COB LED 6.5W.
Other CCT options: 2700K, 3000K, 3500K, 4000K on request.

Optic

Acrylic glass, non-toxic, non-harmful.
More light and transparent than glass.



Driver

It is supplied with an integrated non-dimmable driver.
Dimming Options: Phase, CASAMBI.
220-240V 50/60Hz.


Applications

Lucciole's elegant and subtle lighting effects make these wall-mounted luminaires appear as delicate jewels as they adorn the walls of their architectural environments. Application areas: residential, hotels, restaurants, retail, corridors.







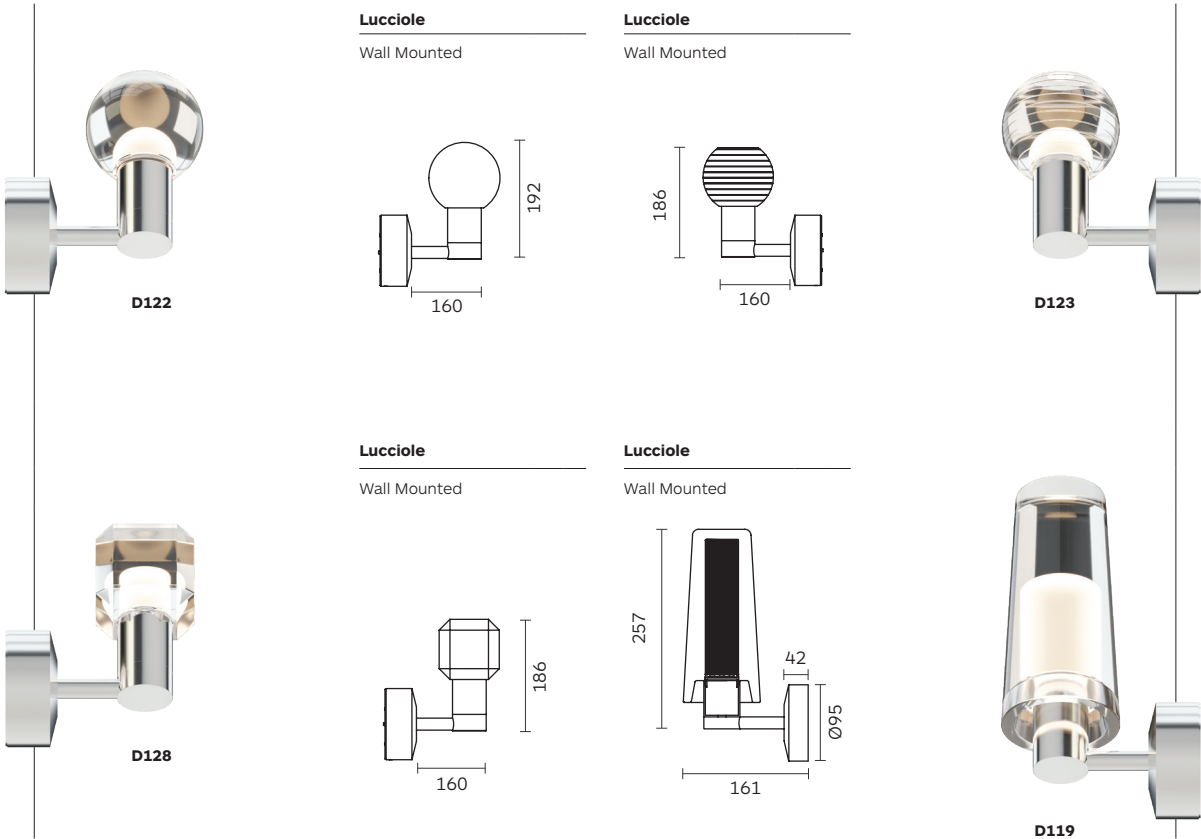

Related Products



Lucciole Wall Mounted



Code ordering example: **D 1 1 9 B B 3 2 - 9 0 DW 0 0 D P 1 0**

	Product Code	Light Source Code*		>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options		Finish	
Lucciole Wall Mounted	D119	BB32	COB LED	90	DW	from 3000K to 1800K	6.5W	724 lm	00	DP	Phase Dim	10  Black
										DC	CASAMBI	65  Matt Black
Lucciole Wall Mounted	D122											11  White
												54  Matt White
Lucciole Wall Mounted	D123											27  Chrome
												30  Bronze
Lucciole Wall Mounted	D128											35  Copper
												40  Brass

Notes:
* For complete code ordering information, please see pages 214-215.
** Other CCT options 2700K, 3000K, 3500K, 4000K on request.
For the most updated product information, please go to our website.

Twist

Surface

Round and Square ceiling mounted downlight with the light body in cast aluminum. Quick and easy installation and relamping via snap-in catch action. Tiltable vertically 0°-20° and rotatable horizontally 350°.

For complete code ordering information, please see pages 214-215.

LED Sources:

Retrofit
GU10

Accessories:

Anti-glare hood, semi-recessed kit.
Check page 146 for details.

- 10 - Black
- 65 - Embossed matt black
- 11 - White
- 54 - Embossed matt white
- 75 - Grey

Twist

350°

20°



IP20

CE

10

11

75



CRI 00 Retrofit		Product Code	Light Source Codes	LED Power	Nominal Lumen	Beam Angle	Dimming Options	CCT Options
	Twist Round	1021	GU10	/	/	00	00 No Driver	00
	Twist Square	1020						

Polaris

Surface 30 with 8 / 12 / 16 light heads



Body

Surface mounted luminaire with light body in extruded aluminum inclusive of integrated diamond faceted nodazzle louvre in thermoplastic.

Surface Mounted arms in cast aluminum. Light body measuring 45mm in width and 65mm in height.

Available in configuration with 8, 12 and 16 light heads.

Light heads collectively tiltable in two directions from 0° to 90° through the surface mounted arms.

Accessories

N/A

Finish

Powder coat in black (10), Embossed matt black (65), white (11), or Embossed matt white (54).
Option for either white or black integrated thermoplastic screen.

LED sources

High Power LED.
CRI: 90 | CCT: 3000K, 4000K.
Other CRI, CCT and Tuneable White options available on request.

Optic

Lens plus thermoplastic screen.
UGR < 16.
Four different (medium and wide) beam angles available.

Driver

Supplied with integrated non-dimmable driver.
Dimming Options: 0-10V Dim, DALI, Phase, CASAMBI.
220-240V 50/60Hz.

Applications

An innovative solution for high performance, uniform illumination with optimal visual comfort. The miniature light heads and optics in the fixture create a high definition, glare-controlled, circular light emission. Application areas: residential, hotels, restaurants, retail, corridors.

Related Products


Polaris Recessed Series
P.16-21

Polaris Wallwasher Series
P.22-25

Polaris Track
P.112

Polaris Pendant
P.160



Polaris

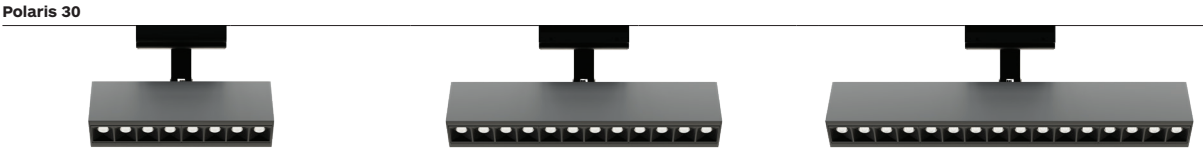

Polaris 30
Surface with 8 LEDs

Polaris 30
Surface with 12 LEDs

Polaris 30
Surface with 16 LEDs

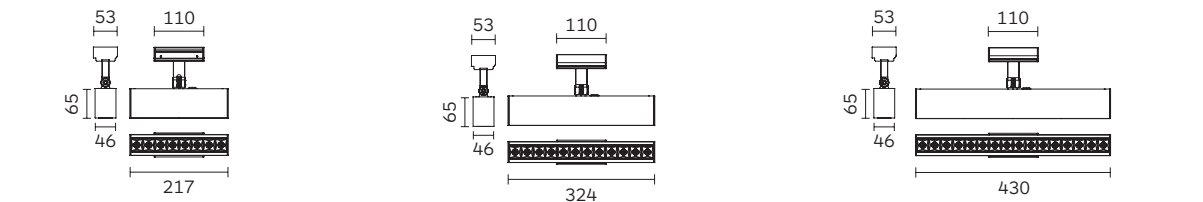

Code ordering example: **1 3 5 0 B 0 1 1 - 9 0 3 0 3 4 D 0 0 1**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Polaris 30 Surface with 8 LEDs	1350	BO11 High Power LED	90	30 3000K	8x2W	1520 lm	34 / 50	D0 No Dim	01 ▣ W/B
				40 4000K		1920 lm			10 ■ Black
Polaris 30 Surface with 12 LEDs	1351				12x2W	2280 lm		D0 No Dim	65 ■ Matt Black
						2880 lm		DA Dali Dim	11 □ White
Polaris 30 Surface with 16 LEDs	1346				16x2W	3040 lm		DP Phase Dim	54 □ Matt White
						3840 lm		DC CASAMBI	17 ▣ B/W
								D1 0-10V Dim	

Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
01: Black light body with white integrated louvre. **17:** White light body with black integrated louvre.
For the most updated product information, please go to our website.

Zero Due

Surface Wall & Ceiling 40 | 66 | 100 | 130



Body

Ceiling and wall mounted spotlight with light body and driver canopy in cast aluminum.

Light body is designed for passive cooling. Available in four different sizes.

Tiltable vertically 0°-90° and rotatable horizontally 360°.

Accessories

Coulored filters, linear spred, honeycomb louvre, visor, anti-glare tube.

Check page 147 for details.

Finish

Powder coat in black (10), Embossed matt black (65), white (11), or Embossed matt white (54).

LED sources

Light Source Options: High Power LED, COB LED.

CRI: 90 | CCT: 3000K, 4000K.

Other CRI and CCT options available on request.

Optic

Lens.

Beam Angle: Narrow / medium / wide. (For COB)

Beam Angle: Super Narrow (7°). (For High Power LED)

Driver

Supplied with non-dimmable driver.

Dimming Options: 0-10V Dim, DALI, Phase.

220-240V 50/60Hz.

Applications

A timeless, iconic, cylindrical spotlight design, incorporating the most advanced lighting technology with a minimalist aesthetic, to suit any interior lighting application.

Application areas: retail, museums, hospitality, residential, offices, lobbies.

Related Products

- Zero Semi-Recessed**

P.12
- Zero In & Out Recessed**

P.36
- Zero Track Series**



P.92-98
- Zero Projector Track**

P.100-103
- Zero Projector Surface**

P.138-141
- Zero Pendant**

P.158

Zero Due

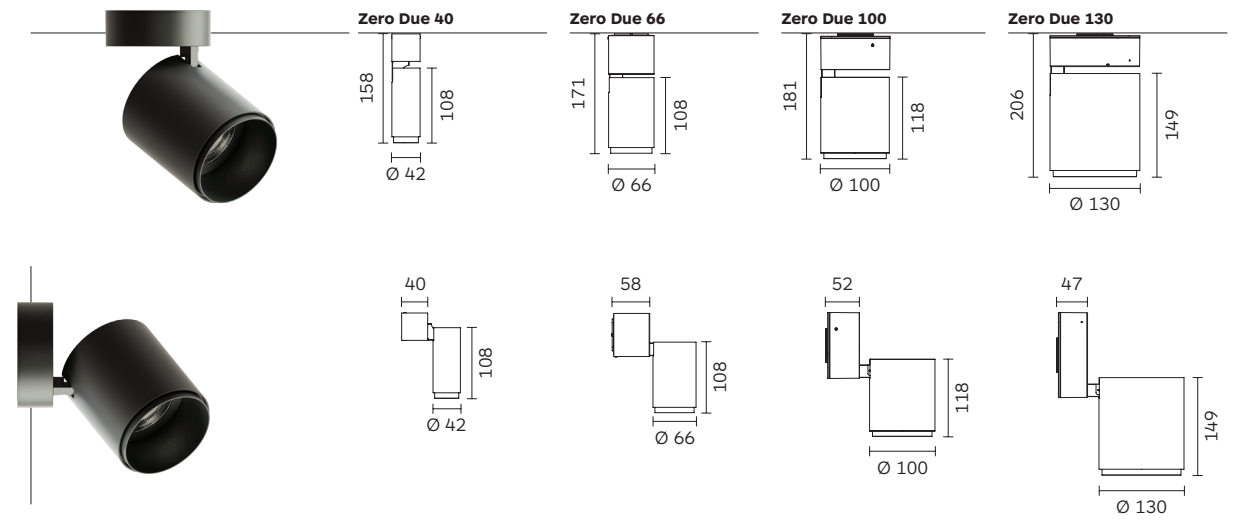

Code ordering example: **1 4 2 1 B R 2 1 - 9 0 3 0 0 7 D 0 1 0**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Zero Due 40 Ceiling & Wall	1421	BR21 High Power LED	90	30 3000K	4W	439 lm	07	D0 No Dim	10 ■ Black
						483 lm			
					5W	517 lm			
Zero Due 66 Ceiling & Wall	1431	BR21 High Power LED			5.7W	574 lm	05	D0 No Dim	65 ■ Matt Black
						636 lm			
					11W	1160 lm			
Zero Due 100 Ceiling & Wall	1432	BR21 High Power LED			21W	2128 lm	07	D0 No Dim	11 □ White
						2356lm			
					21W	2569 lm			
Zero Due 130 Ceiling & Wall	1433	BR21 High Power LED				2703 lm	15 / 24 / 38	DP Phase Dim	54 □ Matt White
						3192 lm			
					31W	3534 lm			
		BC31 COB LED				1258 lm	11 / 16 / 32	D1 0-10V Dim	
						1258 lm			
						1258 lm			
		BC33 COB LED				2703 lm	15 / 24 / 38		
						2703 lm			
						2703 lm			
		BC33 COB LED				3192 lm	12 / 22 / 32		
						3192 lm			
						3192 lm			
		BC33 COB LED				3534 lm			
						3534 lm			
						3534 lm			
		BC33 COB LED				3800 lm			
						3800 lm			
						3800 lm			

Notes:

* For complete code ordering information, please see pages 214-215.

** For other CCT options, please contact us.

For related accessories, please see pages 146-147.

For the most updated product information, please go to our website.

Zero 38 Framing Projector

Surface



- 10 - Black
- 65 - Embossed matt black
- 11 - White
- 54 - Embossed matt white

Advanced, multi-functional LED track mounted projector, tiltable vertically 0°-90° and rotatable horizontally 350°. With built-in bidirectional zooming lens with sharpness adjustability, and lens rotation.

Adjustable shutters to re-frame the beam to the desired size and shape (circle, square/rectangle, or irregular four-sided shapes). Compatible with Gobo insertion for logo.

High-precision optics for sharp outlines and high degree of lighting uniformity.

For complete code ordering information, please see pages 214-215.

LED Sources:

High Rendering:
CRI: 97 | CCT: 2700K, 3000K, 3500K, 4000K.

Accessories:

- Gobo Film, see page 146 for details
- Contact us for custom-made logo projection lens.

Zero Framing Projector

360°

90°

IP20



CE

10

65

11


54

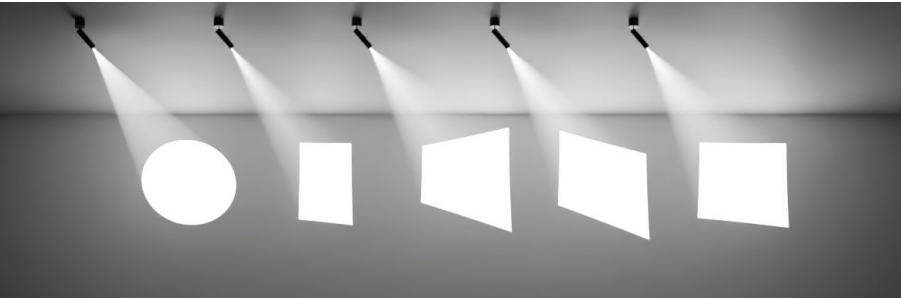

Recommended distance from fixture to wall between 0.5metres to 10metres.



Gobo Film logo projector lens.
Accessory Art. 2G24



		Product Code	Light Source Codes	LED Power	Nominal Lumen	Beam Angle	Dimming Options	CCT Options
<div>CRI>97 3000K High Rendering</div>	Zero Framing Projector 38	1466	BC42	9.6W	848 lm	BS (14°-35°)	<div>D0</div> No Dim	<div>27</div> 2700K
							<div>DA</div> Dali Dim	<div>30</div> 3000K
							<div>DC</div> CASAMBI	<div>35</div> 3500K
								<div>40</div> 4000K

Zero 85 Framing Projector

Surface



- 10 - Black
- 65 - Embossed matt black
- 11 - White
- 54 - Embossed matt white

Advanced, multi-functional LED track mounted projector, tiltable vertically 0°-90° and rotatable horizontally 350°. With built-in bidirectional zooming lens with sharpness adjustability, and lens rotation.

Adjustable shutters to re-frame the beam to the desired size and shape (circle, square/rectangle, or irregular four-sided shapes). Compatible with Gobo insertion for logo.

High-precision optics for sharp outlines and high degree of lighting uniformity.

For complete code ordering information, please see pages 214-215.

LED Sources:

High Rendering:
CRI: 97 | CCT: 2700K, 3000K, 3500K, 4000K.

Accessories:

- Gobo Film, see page 146 for details
- Contact us for custom-made logo projection lens.

Zero Framing Projector

360°

90°

IP20




CE

10

65

11


54

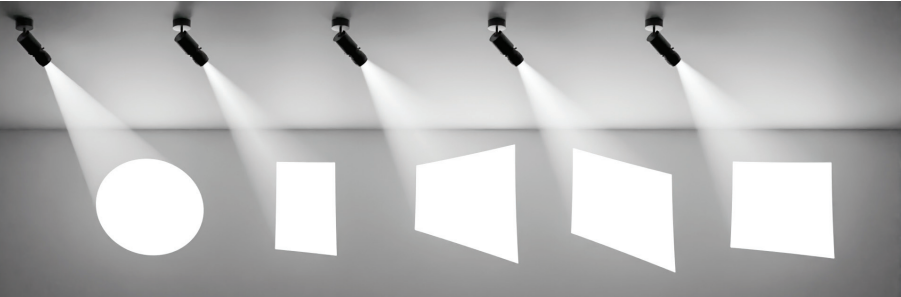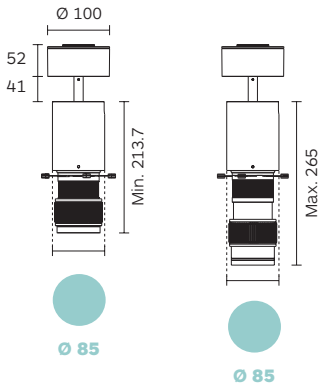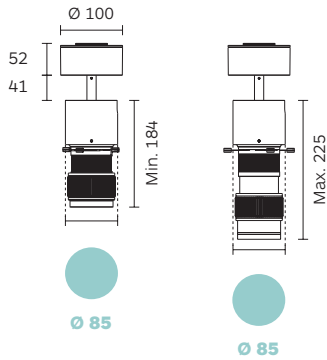

Recommended distance from fixture to wall between 0.5metres to 10metres.



Gobo Film logo projector lens.
Accessory Art. 2F29



		Product Code	Light Source Codes	LED Power	Nominal Lumen	Beam Angle	Dimming Options	CCT Options
<div>CRI>97 3000K</div> <div>High Rendering</div>	Zero Framing Projector 85	1462	BC32	17W	1764 lm	BS (13°-23°)	D0 No Dim	27 2700K
		1463		25W	2332 lm	BW (23°-36°)	DA Dali Dim	30 3000K
							DC CASAMBI	35 3500K
							DN On Board Dimmer	40 4000K

Cubetto

Surface



Body

Wall cube luminaire with body in cast aluminum with designed of slots with opal light diffuser.

Available in five different light distibuition versions.

LED sources

Single LED.
CRI: 90 | CCT: 3000K, 4000K.
Other CRI and CCT options available on request.

Optic

Equipped with acrylic satin opal diffuser.
The slots of the different version offers a wide range of light distribution and beam angles.

Accessories

N/A

Finish

Powder coat in white (11), Embossed matt white (54) or grey (75).

Driver

Inclusive of integrated non-dimmable driver.
220-240V 50/60Hz.


Applications

A modern, isometric, architectural wall-mounted fixture, creating decorative lighting effects.
Application areas: facades, lobbies, walkways, corridors, restaurants, hotels.


Cubetto




Cubetto S1




Cubetto S2



Cubetto SG

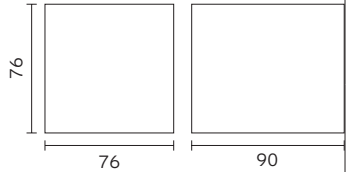

Cubetto G1



Cubetto G2



Code ordering example: **1 1 6 4 B N 1 1 - 9 0 3 0 0 0 D 0 1 1**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Cubetto S1	1164	BN11	Single LED	90	30 3000K	1W	109 lm	00 No Dim	11 □ White
Cubetto S2	1165			40 4000K		116 lm			54 □ Matt White
Cubetto SG	1166								75 ■ Grey
Cubetto G1	1167								
Cubetto G2	1168								

Notes:

* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For the most updated product information, please go to our website.

Circo Pro

Surface Up & Down 350 | 450 | 600 | 900



Body

This next-generation Circo Pro, is designed as an ultra-slim, large circular light surface, delivering both direct and indirect light, with uniform and visually comfortable light distribution, boasting a UGR<19.

Ceiling canopy made of cast aluminum. Housing in aluminum extrusion. With patent-pending highly efficient installation mechanism, for easy use.

Available in four diameter sizes - 350mm, 450mm, 600mm and 900mm. In two versions for surface mounted or pendant installation.

Accessories

Suspension Kit Fixed Rod 2F46. Suspension Kit Wire 2F47. To be ordered separately. See page 145 for details.

Finish

Powder Coated black (10), Embossed matt black (65), white (11), or Embossed matt white (54).

LED sources

LED.
Up: SMD LED. Power from 3.7W to 21W. Lumen from 616lm to 4104lm.
Down: SMD LED. Power from 11W to 45W. Lumen from 1903lm to 7728lm. CRI>80, CCT: 3000K | 4000K

Optic

Micro prismatic diffuser.

Driver


Integrated driver included. 220-240V 50/60Hz.

Applications

Perfect for office use. Application areas: Retail, Education Healthcare, Hospitality, Hotels.

Related Products





Circo Pro Pendant
P.164





Circo Pro



Code ordering example: **1 4 5 4 B M 1 1 - 8 0 3 0 0 0 D 0 1 0**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power		Nominal Lumen		Beam Angle (BA°)	Driver Options	Finish
					Up	Down	Up	Down			
Circo Pro 350 Surface	1454	BM11 SMD LED	80	30 3000K	3.7W	11W	616 lm	1903 lm	EW (00)	D0 No Dim	10  Black
				40 4000K			626 lm	1944 lm		DA Dali Dim	65  Matt Black
Circo Pro 450 Surface	1455				8.3W	17W	1445 lm	2843 lm		DP Phase Dim	11  White
							1469 lm	2922 lm		DC CASAMBI	54  Matt White
Circo Pro 600 Surface	1456				12W	28W	2624 lm	4046 lm		D1 0-10V Dim	
							2678 lm	4106 lm			
Circo Pro 900 Surface	1457				21W	45W	4027 lm	7624 lm			
							4104 lm	7728 lm			




Accessories

Product / Optical Accessories		
	Suspension Kit Fixed Rod	Suspension Kit Wire
Circo Pro Up & Dwon Surface	2F46	2F47

Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
EW = Extra Wide. Ordering code; **00**.
For the most updated product information, please go to our website.






Optical Accessories

					
Product / Optical Accessories	Acrylic diffuser	Honeycomb Louvre Colour 10	Colour Ring Colour 33	Colour Ring Colour 35	Colour Ring Colour 55
Pixo 36 Surface	2E05	/	2E07	2E07	2E07
Pixo 77 Surface	2E06	2E09	2E08	2E08	2E08

				
Product / Optical Accessories	Anti-Glare Hood Colours 10, 17, 75	* Semi-Recessed Kit Colour 10	Gobo film Colour 10	Gobo film Colour 10
Twist Round / Square	2675	2233 / 2232	/	/
Zero Framing Projector 38 Surface	/	/	2G24	/
Zero Framing Projector 85 Surface	/	/	/	2F29

* Semi-Recessed Kit for Usage of GU5.3 MR16 LED. Transformer not included. To be ordered separately.

Optical Accessories

					
Product / Optical Accessories	Coloured Filters Colours 25, 42, 55, 85	Linear Spread Colour 41	Honeycomb Louvre Colour 10	Wallwasher Visor Colours 10, 65, 11, 17	Anti-glare Tube Colours 10, 65, 11, 17
Zero Due 40 Ceiling / Wall	2E36	2E44	2E35	/	2E43
Zero Due 66 Ceiling / Wall	2D63*	2D62*	2C65	2D94	2D67
Zero Due 100 Ceiling / Wall BC33	2E10*	2E12*	2C66	2E14	2E16
Zero Due 100 Ceiling / Wall BR21	/	/	2C70	/	/
Zero Due 130 Ceiling / Wall BC33	2E11*	2E13*	2C67	2E15	2E17
Zero Due 130 Ceiling / Wall BR21	/	/	2E45	/	/

* With holder

Pendant Lighting

Spotify

Pendant 77 | 95



Body

Cylindrical, modular design, suspended mounted fixture, incorporated adjustable led module, available in 2 versions. Spotify Pendant minimal design provides an aesthetic architectural feature together with excellent photometric properties, supplied with 1.5m electrical cable pendant steel wires available in different lengths.

Integrated driver which is a perfect solution for spaces without false ceiling, the adjustable LED module together with the future-proof modular design enables full flexibility easy installation and effortless maintenance.

Accessories

Tool-free interchangeable Honeycomb louvre, Linear Spread, Concave Trim. Check page 151 for details.

Finish

Powder coat in black (10), Embossed matt black (65), white (11), or Embossed matt white (54).

LED sources

Light source options:
High efficacy.
CRI: 90 | CCT: 2700K, 3000K, 3500K, 4000K.
Other CRI and CCT options available on request.

Optic

High grade PMMA Lenses.
Beam angle: Narrow / Medium / Wide.

Driver

Integrated driver included.
Dimming options: 0-10V, DALI, Phase, Casambi.
220-240V 50/60Hz.

Applications

Suspended mounted luminaires with simple design used to provide ambient or accent lighting. Ideal to be installed in concrete ceiling or restricted voids.
Application areas: High-end residential, retail, hospitality, lobbies, corridors.

Related Products

Spotify Recessed Series

P.50-57


Spotify Surface

P.124

Pixo Pendant

P.152

Spotify Pendant Adjustable

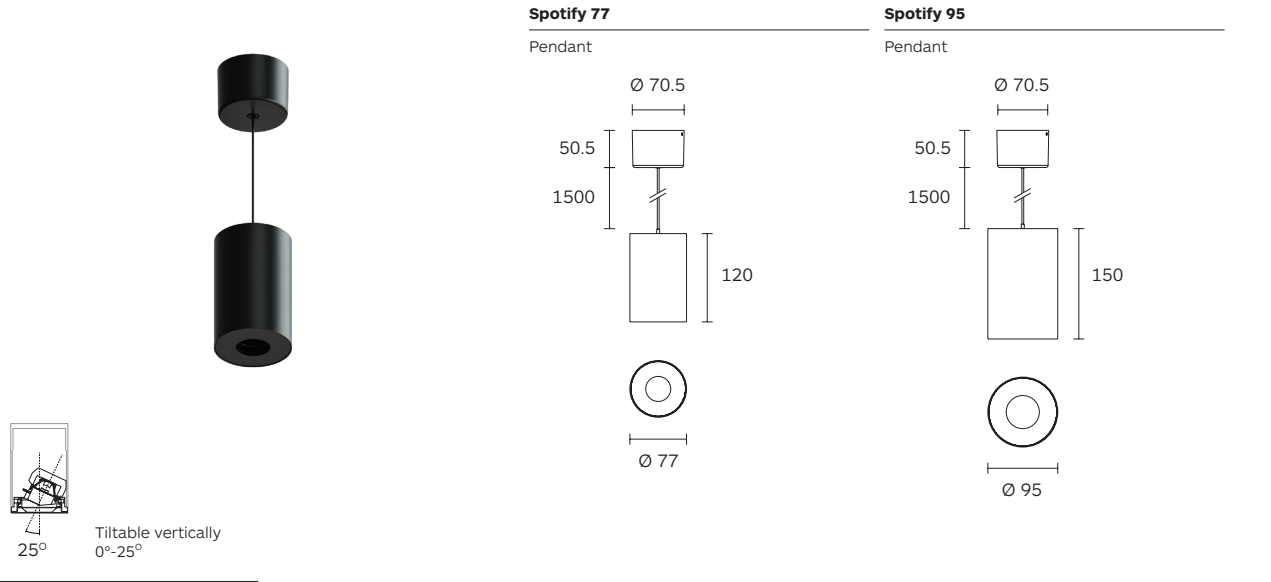

Code ordering example: **7 3 3 7 M C 3 6 - 9 0 2 7 2 0 D 0 1 0**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Spotify 77 Pendant	7337	MC36	High efficacy	90	27 2700K	5W	654 lm	D0 No Dim	10 ■ Black
					30 3000K		691 lm		65 ■ Matt Black
					35 3500K		723 lm		11 □ White
					40 4000K		738 lm		54 □ Matt White
Spotify 95 Pendant	7336				9W	1043 lm	12 / 21 / 28	D1 0-10V Dim	
						1101 lm			
						1152 lm			
						1176 lm			

Optical Accessories

Product / Optical Accessories	Honeycomb Louvre Colours 10, 65, 11, 17	Linear Spread Colours 10, 65, 11, 17	Concave Trim Colours 10, 65, 11, 17
Spotify 77 Pendant	2F54	2F55	2F56
Spotify 95 Pendant	2F57	2F58	2F59

Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For the most updated product information, please go to our website.

Pixo

Pendant 25 | 36 | 77



Body

Pendant mounted luminaire with light body in extruded aluminum.

Light body available in three diameters (25mm, 36mm and 77mm) and four different length, to fit any ceiling height .

Exchangable front ring in wide range of colours. Supplied with ceiling canopy and pre-installed 1.5m electrical cable.

LED sources

Light source options: High Power LED (Pixo 25). COB LED (Pixo 36 and Pixo 77). CRI: 90 | CCT: 3000K, 4000K, Tuneable White. Other CRI and CCT options available on request.

Optic

Lens. Beam Angle: Narrow / Medium / Wide.

Accessories

Honeycomb (Pixo 77). Decorative ring available in different colours. Transparent acrylic decorative diffuser. Check page 154 for details.

Finish

Powder coat in black (10), Embossed matt black (65), white (11), or Embossed matt white (54). Exchangable front ring in different colours.

Driver

Supplied with integrated non-dimmable driver. Dimming Options (only for Pixo 77): 0-10V Dim, Phase, CASAMBI. 220-240V 50/60Hz.

Applications

A cylindrical, minimalist pendant luminaire offering ambient light, designed to blur the line between architectural and decorative when accessorized or grouped with its various sizes. Application areas: residential, hotels, restaurants, retail, corridors.

Related Products


Pixo Semi-Recessed

P.14



Pixo Pendant Track

P.106




Pixo Surface

P.126



Pixo 25 & 36

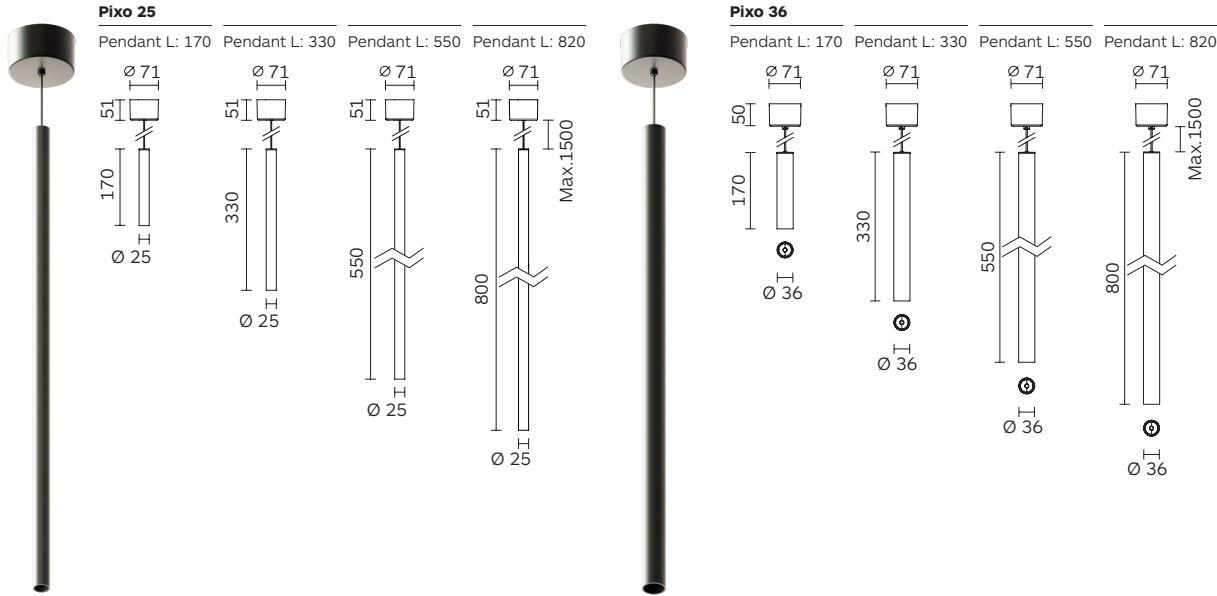


Code ordering example: **7 2 8 2 B N 1 1 - 9 0 3 0 1 4 D 0 1 0**

	Product Code	Product Length	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Pixo 25 Pendant	7282	170	BN11 High Power LED	90	30 3000K	2W	230 lm	14 / 20 / 26 / 32	D0 No Dim	10 ■ Black
	7283	330			40 4000K		260 lm			65 ■ Matt Black
	7284	550								11 □ White
	7285	800								54 □ Matt White
Pixo 36 Pendant	7235	170	BC31 COB LED			5W	500 lm	20 / 26 / 36	D0 No Dim	
	7236	330					550 lm			
	7238	550								
	7240	800								

Notes:

* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For related accessories, please see page 186.
For the most updated product information, please go to our website.




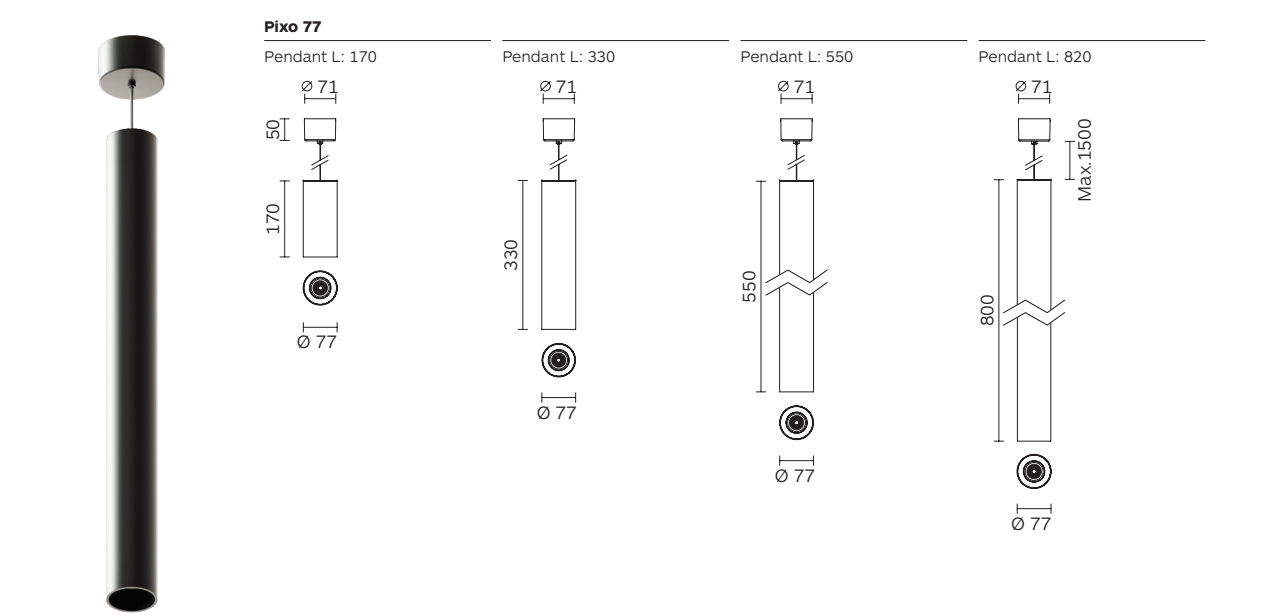

Pixo 77



Code ordering example: **7 2 3 4 B C 2 2 - 9 0 3 0 1 2 D 0 1 0**

	Product Code	Product Length	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Pixo 77 Pendant	7234	170	BC22 COB LED	90	30 3000K	12W	1570 lm	12 / 20 / 32	D0 No Dim	10 ■ Black
	7237	330			40 4000K		1600 lm		DP Phase Dim	65 ■ Matt Black
	7239	550							DC CASAMBI	11 □ White
	7241	800							D1 0-10V Dim	54 □ Matt White

Optical Accessories

Product / Optical Accessories	 Honeycomb Louvre Colour 10	 Acrylic diffuser	 Colour Ring Colour 33	 Colour Ring Colour 35	 Colour Ring Colour 55
Pixo 36	/	2E05	2E07	2E07	2E07
Pixo 77	2E09	2E06	2E08	2E08	2E08

Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For the most updated product information, please go to our website.



Lucciole

Pendant



Body

The Lucciole pendant suspension series brings a new perspective to the pendant lighting by incorporating non-toxic acrylic glass lamps, which are ceiling-mounted with a round chrome-plated fixture body of 95mm diameter, which not only enhances the visual appeal but also ensures the durability-supplied with a suspension cable of 2200mm (field adjustable included).

Inspired by Firefly's ability of natural glow, it features suspension lamps of various shapes, sizes, and designs. A very eco-friendly and 100% recyclable lamp with diffuse light distribution.

Accessories

Supplied with 2200mm suspension cables (field adjustable) included.

Finish

Decorative Black (10), Embossed matt black (65), white (11), Embossed matt white (54), Chrome (27), Bronze (30), Copper (35) or Brass (40).

LED sources

Light source options: Bridgelux - Vesta Series Dim to Warm LED COB.
CRI: 90 | CCT: 3000K – 1800K
COB LED 6.5W.
Other CCT options: 2700K, 3000K, 3500K, 4000K on request.

Optic

Acrylic glass, non-toxic, non-harmful.
More light and transparent than glass.




Driver

It is supplied with an integrated non-dimmable driver.
Dimming Options: Phase, CASAMBI.
220-240V 50/60Hz.


Applications

Lucciole's elegant and subtle lighting effects make these pendant luminaires appear as delicate jewels in their environments. Designed to blur the line between architectural and decorative as the series offers a play of forms. Application areas: residential, hotels, restaurants, retail, corridors.

Related Products



Lucciole Pendant

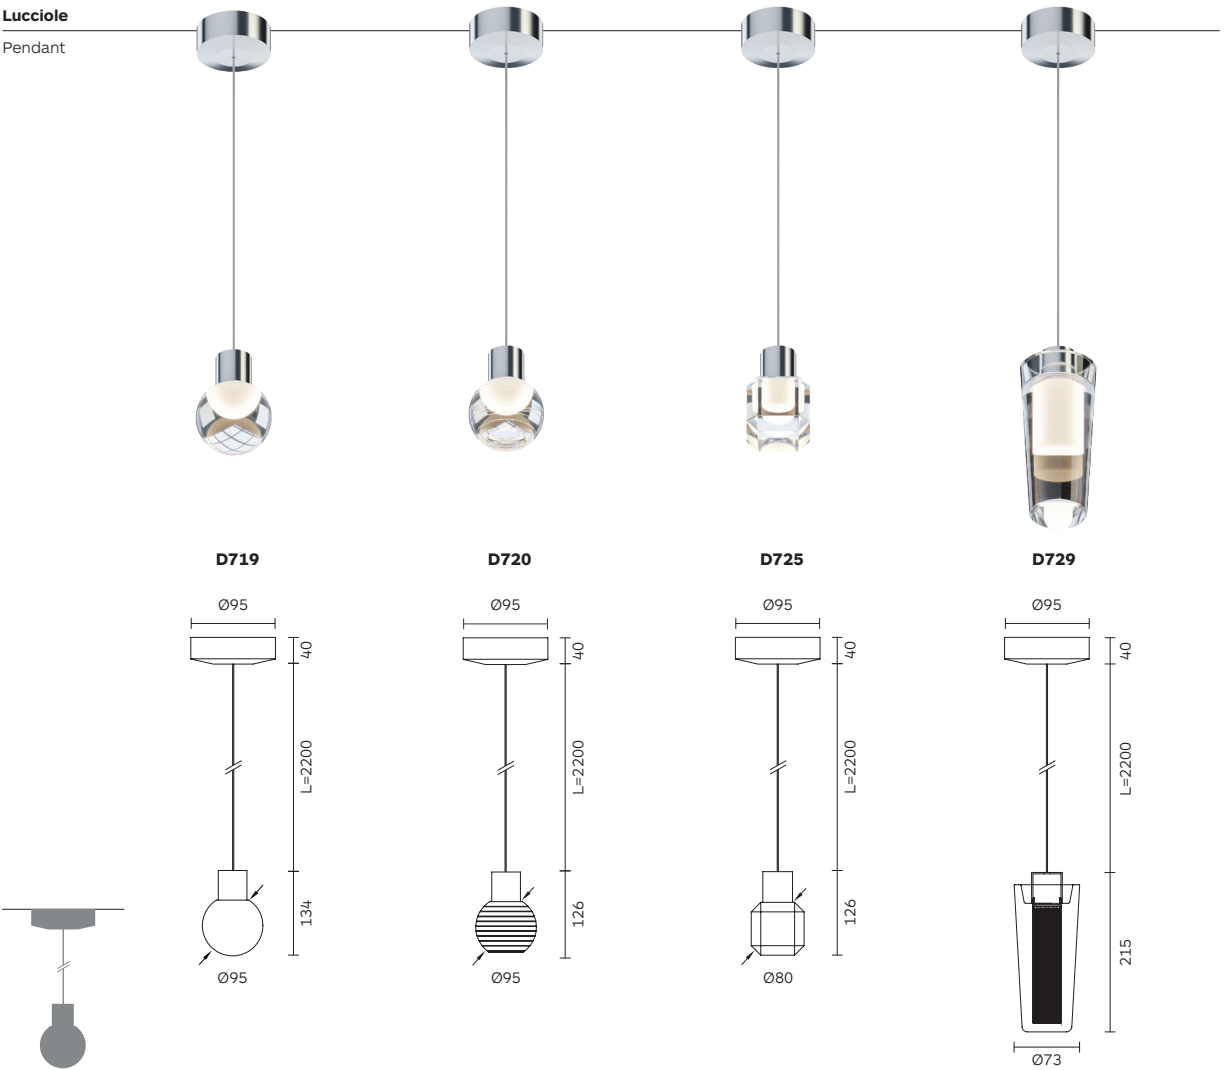

Code ordering example: **D 7 1 9 B B 3 2 - 9 0 D W 0 0 D P 1 0**

	Product Code	Light Source Code*		>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options		Finish
Lucciole Pendant	D719	BB32	COB LED	90	DW	from 3000K to 1800K	6.5W	724 lm	00	DP Phase Dim DC CASAMBI	10 ■ Black 65 ■ Matt Black
Lucciole Pendant	D720										11 □ White 54 □ Matt White
Lucciole Pendant	D725										27 ■ Chrome 30 ■ Bronze
Lucciole Pendant	D729										35 ■ Copper 40 ■ Brass

Notes:

* For complete code ordering information, please see pages 214-215.
** Other CCT options 2700K, 3000K, 3500K, 4000K on request.
For the most updated product information, please go to our website.

Zero

Pendant 66 | 100 | 130



Body

Pendant mounted spotlight with light body and mounting clamps in cast aluminum.

Supplied with ceiling canopy and pre-installed 1.5m electrical cable with 2 x 1.5m pendant steel wires.

Top cover options of different coloured finishes.

Available in three different sizes.

Versatile aiming angle tiltable vertically 0°-90° in two directions and rotatable horizontally 360°.

Accessories

Coloured filters, linear spread, honeycomb louvre, visor, anti-glare tube. Check page 159 for details.

Finish

Powder coat in black (10), Embossed matt black (65), white (11), or Embossed matt white (54).

LED sources

Light Source Options: High Power LED, COB LED. CRI: 90 | CCT: 3000K, 4000K. Other CRI and CCT options available on request.

Optic

Lens. Beam Angle: Narrow / Medium / Wide. (For COB) Beam Angle: Super Narrow 7°. (For High Power LED)

Driver

Supplied with non-dimmable driver. Dimming Options: 0-10V Dim, DALI, Phase, CASAMBI. 220-240V 50/60Hz.

Applications

A pendant luminaire featuring a clean aesthetic, ideal also for high ceiling spaces and for local 'task' lighting when placed over counters and tables. Application areas: restaurants, hotels, lobbies, residential, retail.

Related Products

- Zero Semi-Recessed

P.12
- Zero In & Out Recessed

P.36
- Zero Track Series


P.92-98
- Zero Projector Track

P.100-103
- Zero Due Surface

P.136
- Zero Projector Surface

P.138-141

Zero

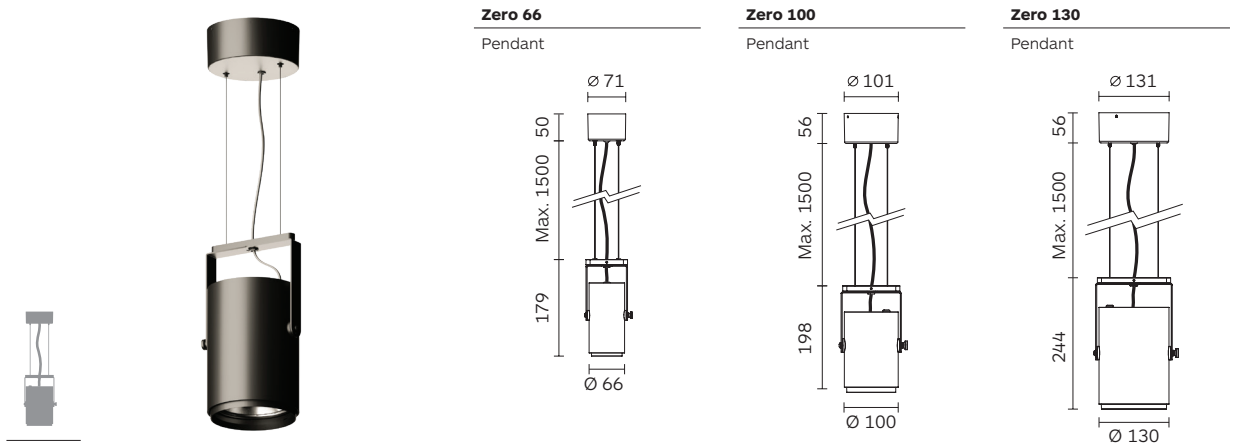

Code ordering example: **7 1 8 9 B R 2 1 - 9 0 3 0 0 5 D 0 1 0**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Zero 66 Pendant	7189	BR21 High Power LED	90	30 3000K 40 4000K	6W	574 lm	05	D0 No Dim	10 ■ Black 65 ■ Matt Black 11 □ White 54 □ Matt White
		BC31 COB LED			11W	636 lm 1160 lm 1258 lm		DP Phase Dim	
Zero 100 Pendant	7188	BR21 High Power LED			18W	1947 lm 2153 lm	07	D0 No Dim DA Dali Dim	
		BC33 COB LED			21W	2569 lm 2703 lm		DP Phase Dim DC CASAMBI	
Zero 130 Pendant	7168	BR21 High Power LED			27W	2920 lm 3230 lm	07	D1 0-10V Dim	
		BC33 COB LED			33W	3598 lm 3800 lm			

Optical Accessories

Product / Optical Accessories	Coloured Filters Colours 25, 42, 55, 85	Linear Spread Colour 41	Honeycomb Louvre Colour 10	Visor Colours 10, 65, 11, 17	Anti-glare Tube Colours 10, 65, 11, 17
Zero 66 Pendant	2D63*	2D62*	2C65	/	2D67
Zero 100 Pendant For BC33	2E10*	2E12*	2C66	2E14	2E16
Zero 100 Pendant For BR21	/	/	2C70	/	/
Zero 130 Pendant For BC33	2E11*	2E13*	2C67	2E15	2E17
Zero 130 Pendant For BR21	/	/	2E45	/	/


* With holder

Notes:

* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For the most updated product information, please go to our website.

Polaris

Pendant 20 & 30

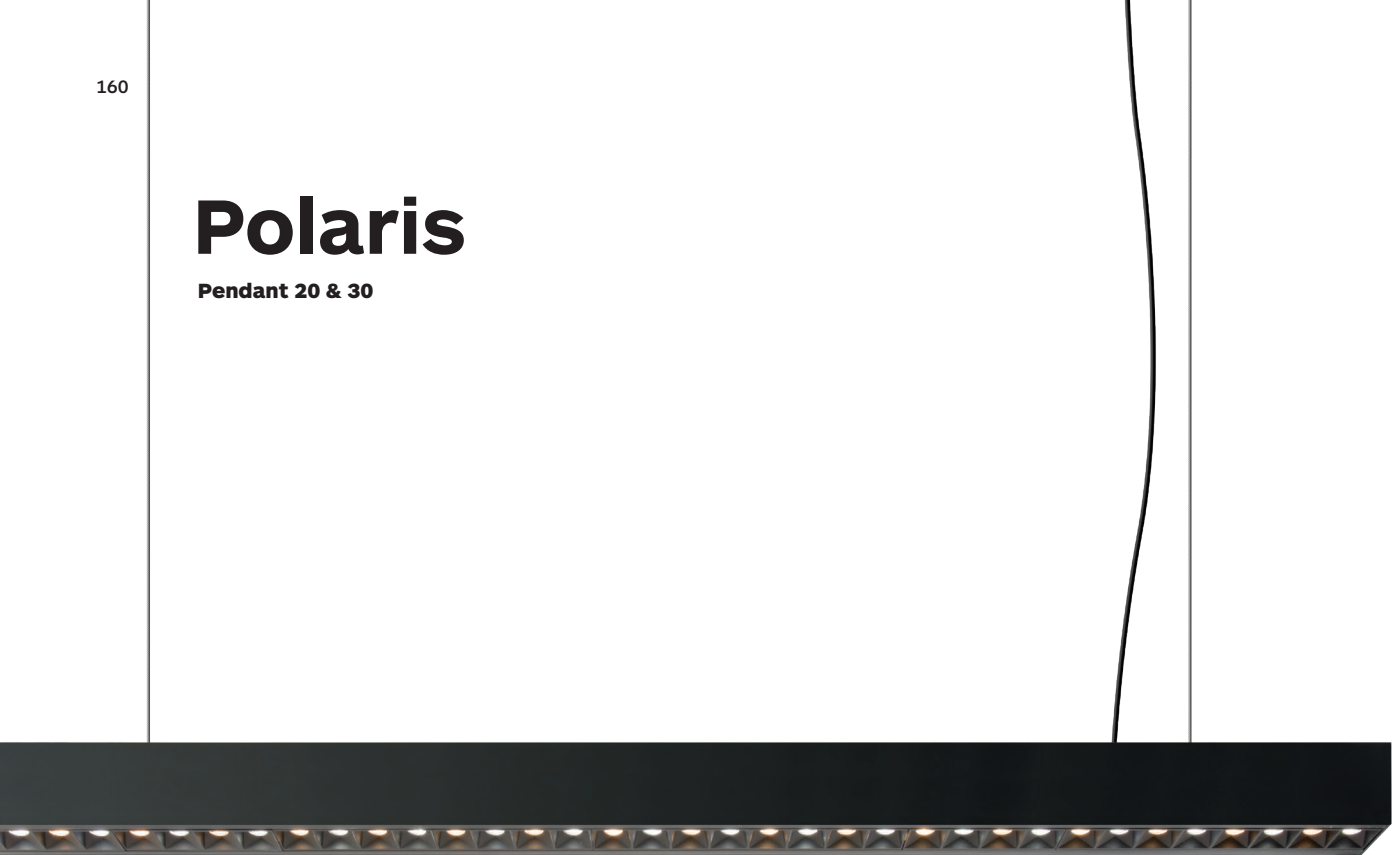

Body

Pendant mounted luminaire with light body in extruded aluminum. Available in two different sizes. Boths are available in a version inclusive of integrated diamond faceted no-dazzle screen in thermoplastic.

Polaris 20 comes also equipped with a satin opal diffuser. Supplied with ceiling canopy and pre-installed 1.5m electrical cable and with 2 x 1.5m pendant steel wires.

Accessories

N/A

Finish

Powder coat in black (10), Embossed matt black (65), white (11), or Embossed matt white (54). Option for either white or black integrated thermoplastic screen. Polaris 20: available with opal diffuser.

LED sources

High Power LED.
CRI: 90 | CCT: 3000K, 4000K.
Other CRI, CCT and Tuneable White options available on request.

Optic

Polaris 20 & 30: Lens plus thermoplastic screen.
UGR < 16.
Four different (medium and wide) beam angles available.
Polaris 20: acrylic opal satin diffuser.

Driver

Supplied with integrated non-dimmable driver.
Dimming Options: 0-10V Dim, DALI, Phase, CASAMBI.
220-240V 50/60Hz.

Applications

An innovative solution for high performance, uniform illumination with optimal visual comfort. The miniature light heads and optics in the pendant fixture, create a high definition, glare-controlled, circular light emission. Application areas: residential, hotels, restaurants, retail, corridors.

Related Products

Polaris Recessed Series
P.16-21

Polaris Wallwasher Series
P.22-25

Polaris Track
P.112

Polaris Surface
P.134


Polaris

Polaris 20




Polaris 20

Pendant with diffuse L:690

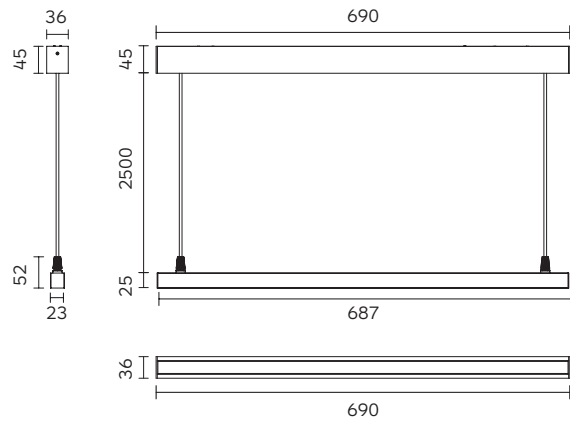

Polaris 20

Pendant with diffuse L:915

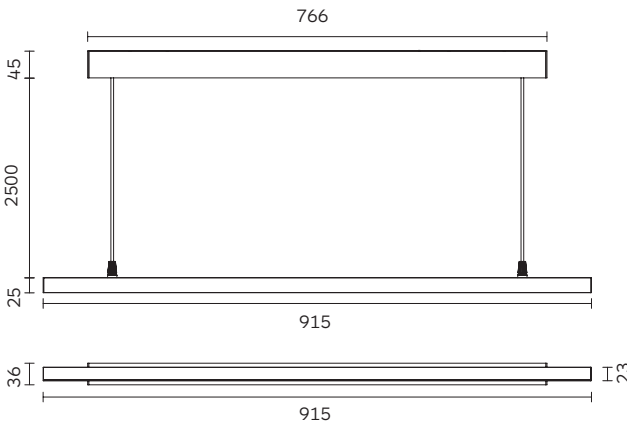

Code ordering example: **7 3 0 7 B T 2 1 - 9 7 3 0 O D D 0 1 0**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Polaris 20	7307	BT21	High Power LED	97	30	3000K	16W	2079 lm	OD Opal Diffuser
Pendant with diffuse L: 690				40	4000K			2200 lm	DA Dali Dim
Polaris 20	7308					22W	2835 lm		DP Phase Dim
Pendant with diffuse L: 915							3000 lm		DC CASAMBI
									D1 0-10V Dim

Notes:


* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For the most updated product information, please go to our website.

Polaris

Polaris 20



Polaris 20
Pendant with 36 LEDs

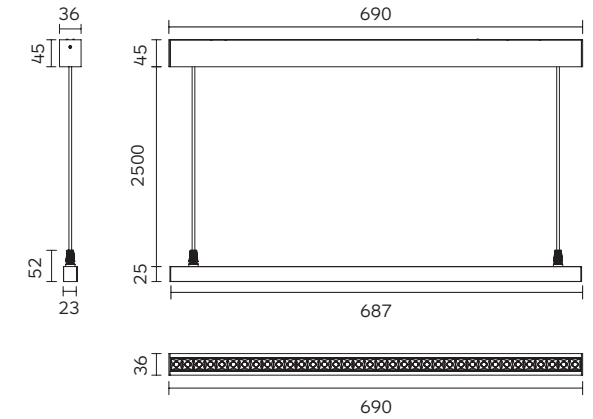

Code ordering example: **7 2 7 5 B O 1 1 - 9 0 3 0 2 1 D 0 0 1**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Polaris 20 Pendant with 36 LEDs	7275	BO11 High Power LED	90	30 3000K	36x1	4680 lm	21 / 30 / 45 / 60	D0 No Dim	01 ▮ W/B
				40 4000K		5400 lm		DA Dali Dim	10 ■ Black
Polaris 20 Pendant with 48 LEDs	7276				48x1	6240 lm		DP Phase Dim	65 ■ Matt Black
						7200 lm		DC CASAMBI	11 □ White
								D1 0-10V Dim	54 □ Matt White
									17 ▮ B/W


Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
01: Black light body with white integrated louvre. **17:** White light body with black integrated louvre.
For the most updated product information, please go to our website.

Polaris

Polaris 30



Polaris 30
Pendant 36 LEDs

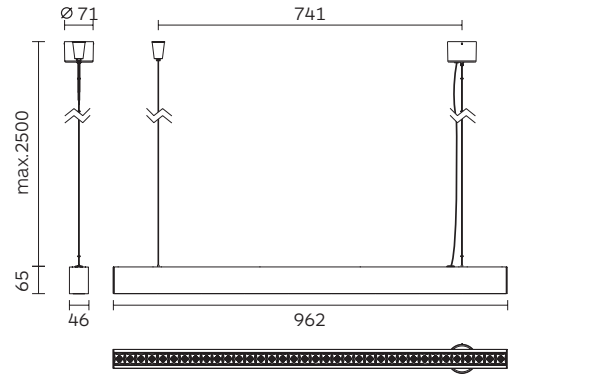

Code ordering example: **7 2 0 5 B O 1 1 - 9 0 3 0 3 4 D 0 0 1**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Polaris 30 Pendant 36 LEDs	7205	BO11 High Power LED	90	30 3000K	36x2W	6840 lm	34 / 50	D0 No Dim	01 ▮ W/B
				40 4000K		8640 lm		DA Dali Dim	10 ■ Black
Polaris 30 Pendant 48 LEDs	7211				48x2W	9120 lm		DP Phase Dim	65 ■ Matt Black
						11520 lm		DC CASAMBI	11 □ White
								D1 0-10V Dim	54 □ Matt White
									17 ▮ B/W

Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
01: Black light body with white integrated louvre. **17:** White light body with black integrated louvre.
For the most updated product information, please go to our website.

Circo Pro

Pendant Up & Down 350 | 450 | 600 | 900



Body

This next-generation Circo Pro, is designed as an ultra-slim, large circular light surface, delivering both direct and indirect light, with uniform and visually comfortable light distribution, boasting a UGR<19.

Ceiling canopy made of cast aluminum. Housing in aluminum extrusion. With patent-pending highly efficient installation mechanism, for easy use.

Available in four diameter sizes - 350mm, 450mm, 600mm and 900mm. In two versions for surface mounted or pendant installation.

Accessories

N/A

Finish

Powder Coated black (10), Embossed matt black (65), white (11), or Embossed matt white (54).

LED sources

LED.
Up: SMD LED. Power from 3.7W to 21W. Lumen from 616lm to 4104lm.
Down: SMD LED. Power from 11W to 45W. Lumen from 1903lm to 7728lm. CRI>80, CCT: 3000K | 4000K

Optic

Micro prismatic diffuser.

Driver

Integrated driver included.
220-240V 50/60Hz.

Applications

Perfect for office use.
Application areas: Retail, Education Healthcare, Hospitality, Hotels.

Related Products

Circo Pro Surface
P.144



Circo Pro




Circo Pro Up & Down

Pendant




Circo Pro Up & Down


Pendant with rod



Product Code	Lenght (L) in mm
7290	Ø 350
7291	Ø 450
7292	Ø 600
7293	Ø 900



Product Code	Lenght (L) in mm
7294	Ø 350
7295	Ø 450
7296	Ø 600
7297	Ø 900



Code ordering example: **7 2 9 0 B M 1 1 - 8 0 3 0 0 0 D 0 1 0**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power		Nominal Lumen		Beam Angle (BA°)	Driver Options	Finish
					Up	Down	Up	Down			
Circo Pro 350 Pendant	7290	BM11	SMD LED	80	3.7W	11W	616 lm	1903 lm	EW (00)	D0 No Dim	10 ■ Black
Circo Pro 450 Pendant	7291			40	8.3W	17W	1445 lm	2843 lm		DA Dali Dim	65 ■ Matt Black
Circo Pro 600 Pendant	7292				12W	28W	1469 lm	2922 lm		DP Phase Dim	11 □ White
Circo Pro 900 Pendant	7293				21W	45W	2624 lm	4046 lm		DC CASAMBI	54 □ Matt White
Circo Pro 350 Pendant with rod	7294				3.7W	11W	2678 lm	4106 lm		D1 0-10V Dim	
Circo Pro 450 Pendant with rod	7295				8.3W	17W	4027 lm	7624 lm			
Circo Pro 600 Pendant with rod	7296				12W	28W	4104 lm	7728 lm			
Circo Pro 900 Pendant with rod	7297				21W	45W					

Notes:

* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
EW = Extra Wide. Ordering code; **00**.
For the most updated product information, please go to our website.




Indoor Lighting Systems

<“Light and the rational forms are locked in combat; light sets them into motion, bends what is straight, makes parallels oval, inscribes circles in the intervals, makes the intervals active”>.

Paul Klee


Canali Edge

Edge Forms System

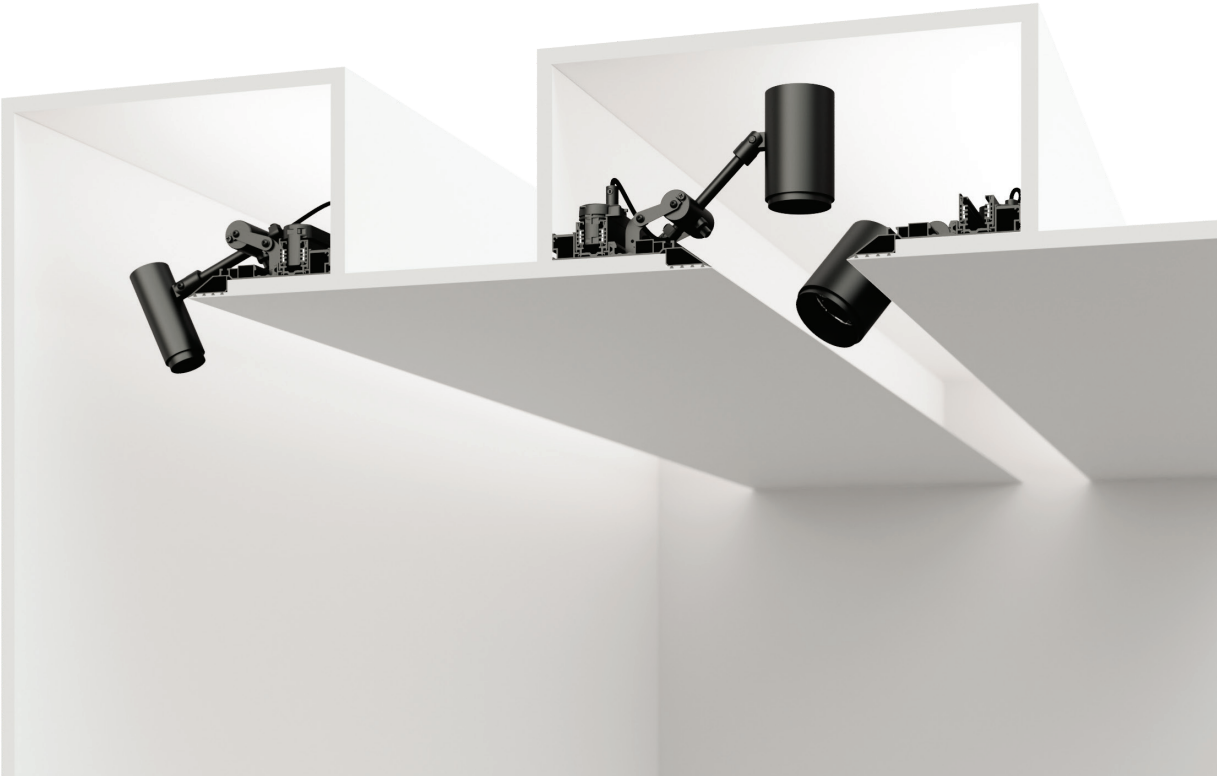

Body

The new Canali edge is a revolutionary edge-less lighting system featuring easy and clean installation, eliminating wired connections and gearboxes in the cove. Canali Edge profile features easy-to-clip on adjustable spotlights, together with a dedicated channel for linear cove lights fixed by magnets, all in extruded aluminum. The Integrated three phase track system with DALI bus enables full DALI control on both linear and track spots. Small and powerful in-track integrated drivers make it very easy to move and reposition the spotlights and the linear lights.

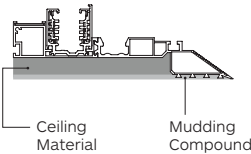

LED sources

Spotlights: Zero 42, Zero 66 & Zero 80 LED spotlights from Zero Track range, which can be easily-clip-on and move along the channel.

Cove Light: Microline, a high-performance LED linear light available in various length configurations and CCTs.

Accessories


Track Accessories: Feeder for left and right, Concealed Connector, End Cap. For more detailed information about the accessories, please go to page 118.

Accommodation modules for: fire sprinklers, surveillance camera, HVAC diffuser, speakers, WiFi access point available upon request.



Applications

New Canali edge is best suited for discreet lighting applications to enhance the architectural detail. It can be applied in multiple areas such as retail, museums, galleries, exhibits, jewelry, shops, residential, lift lobbies due to its versatile design property.

Canali Edge

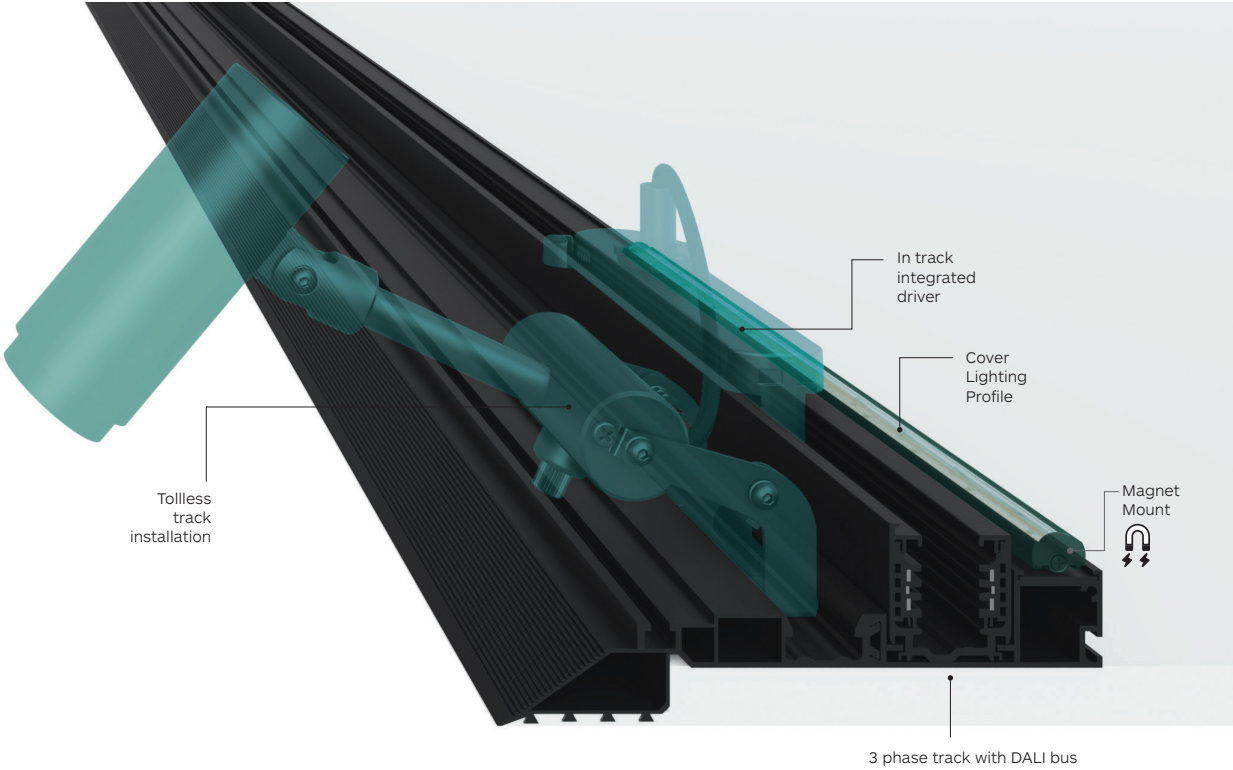

Canali Edge Traverse Profile

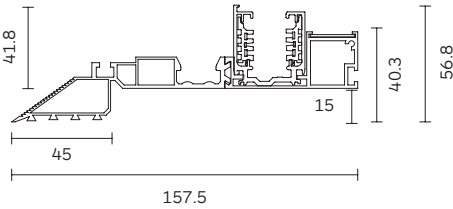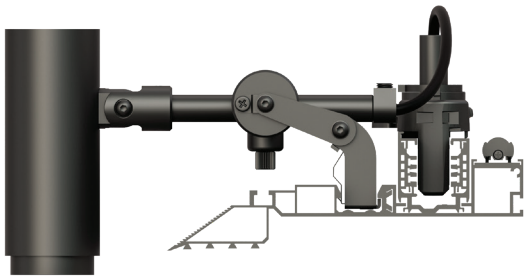

Code ordering example: 8 4 0 9 1 0 0 0 - 0 0 0 0 0 0 0 1 0


Product Code	Length Code	Length in mm	Length in m	>CRI	CCT	Driver Options	Finish
8409	1000	1000 mm	1 m	00	00	00 No Driver	10 ■ Black
	2000	2000 mm	2 m				65 ■ Matt Black
	3000	3000 mm	3 m				

Canali Edge - Spot Lights




Canali Edge Zero 40

Spot Lights

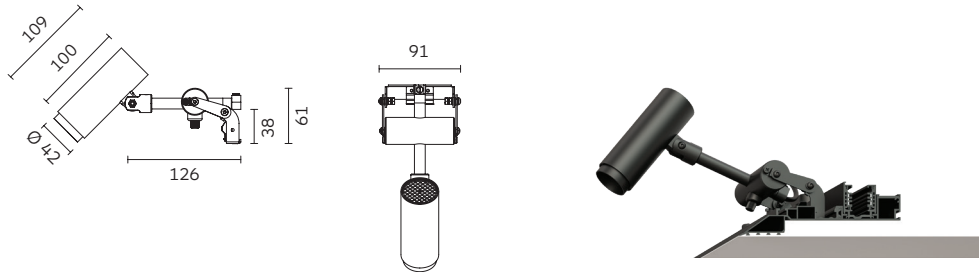


Canali Edge Zero 66

Spot Lights

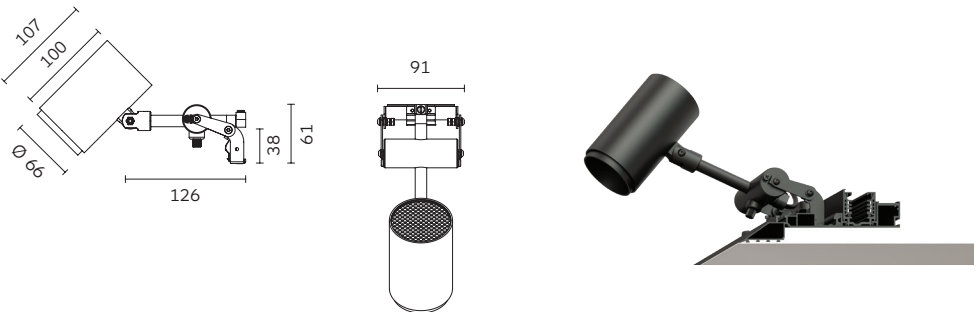

Canali Edge Zero 80

Spot Lights

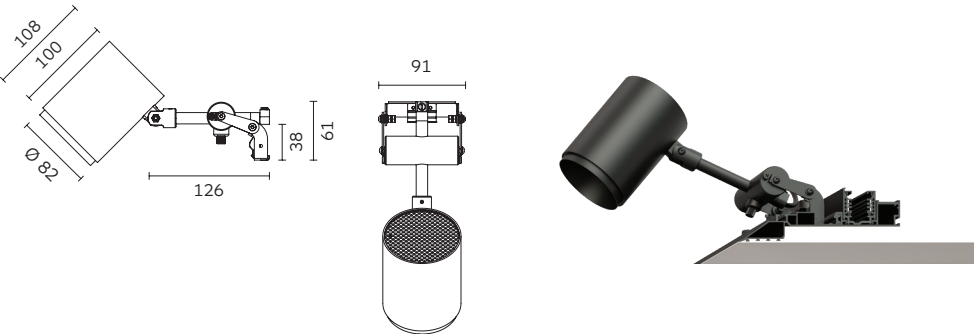

Code ordering example: **8 4 1 0 B N 2 1 - 9 0 3 0 1 6 D 0 1 0**

	Product code	Light source code	>CRI	CCT**	LED power	Nominal lumen	Beam angle (BA°)	Driver Options	Finish
Canali Edge Zero 40	8410	BN21 High Power LED	90	30 3000K 40 4000K	8W	961 lm 1070 lm	16 / 26 / 36	D0 No Dim DA Dali Dim	10 ■ Black 65 ■ Matt Black
Canali Edge Zero 66	8411				12W	1436 lm 1535 lm	11 / 16 / 32	DC CASAMBI DN On-board Dimmer	
Canali Edge Zero 80	8412				19W	2009 lm 2180 lm	10 / 22 / 26		


Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For related accessories, please see page 173.
Transformer and driver are not included. To be ordered separately.
For the most updated product information, please go to our website.

Canali Edge - Linear Cover Lights




Canali Edge Microline Ø14

Linear Cover Lights

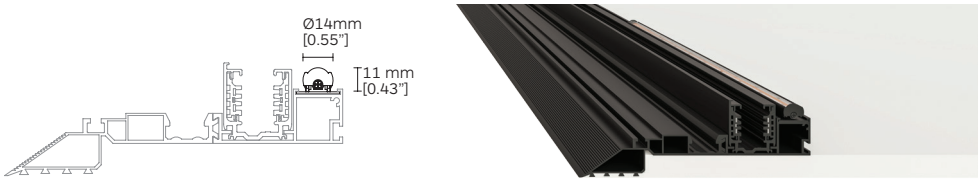


Min. L= 35mm (1.37")




Mounting options

With magnet



Max. L= 2105mm (82.87")


Increment: 30mm (1.18")

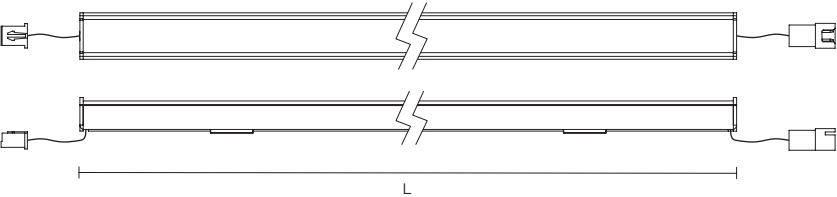

Code ordering example: **G 4 4 5 0 9 9 5 - 9 7 2 7 O D 0 0 1 0**

	Product code	Length code***	Light Source	>CRI	CCT**	LED power	Nominal lumen	Diffuser	Driver Options	Finish
Canali Edge Microline Ø14 16W/m	G445	0995	LED	97	27 2700K 30 3000K 35 3500K 40 4000K	16W/m	1287lm/m	OD TD RD	00 No Driver	10 ■ Black 65 ■ Matt Black 28 ■ Brass Polished 35 ■ Gold 70 ■ Aluminium

Recommended Driver: Driver to be ordered separately. Work with 24VDC Constant Voltage LED Driver positioned remotely. Please see page 211 for further information.

Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, Tuneable White  / RGB / RGBW version, please contact us.
*** For complete list of length codes, please see pages 172.
For the most updated product information, please go to our website.

OD = Opal diffuser. Ordering code; **OD**.
TD = Transparent lenticular diffuser. Ordering code; **TD**.
RD = Opal rigid diffuser. Ordering code; **RD**.

Complete Length Codes List

Microline Ø14 | 16W/m | G445


Available length codes

LED Power	Length code	Length in mm	Length in inches	Nominal Lumen	LED Power	Length code	Length in mm	Length in inches	Nominal Lumen	LED Power	Length code	Length in mm	Length in inches	Nominal Lumen
0.48W	0035	35	1.37	45 lm	12.00W	0755	755	29.72	972 lm	23.52W	1475	1475	58.07	1898 lm
0.96W	0065	65	2.56	84 lm	12.48W	0785	785	30.91	1010 lm	24.00W	1505	1505	59.25	1937 lm
1.44W	0095	95	3.74	122 lm	12.96W	0815	815	32.09	1049 lm	24.48W	1535	1535	60.43	1976 lm
1.92W	0125	125	4.92	161 lm	13.44W	0845	845	33.27	1088 lm	24.96W	1565	1565	61.61	2014 lm
2.40W	0155	155	6.10	199 lm	13.92W	0875	875	34.45	1126 lm	25.44W	1595	1595	62.80	2053 lm
2.88W	0185	185	7.28	238 lm	14.40W	0905	905	35.63	1165 lm	25.92W	1625	1625	63.98	2091 lm
3.36W	0215	215	8.46	277 lm	14.88W	0935	935	36.81	1203 lm	26.40W	1655	1655	65.16	2130 lm
3.84W	0245	245	9.65	315 lm	15.36W	0965	965	37.99	1242 lm	26.88W	1685	1685	66.34	2169 lm
4.32W	0275	275	10.83	354 lm	15.84W	0995	995	39.17	1281 lm	27.36W	1715	1715	67.52	2207 lm
4.80W	0305	305	12.01	393 lm	16.32W	1025	1025	40.35	1319 lm	27.84W	1745	1745	68.70	2246 lm
5.28W	0335	335	13.19	431 lm	16.80W	1055	1055	41.54	1358 lm	28.32W	1775	1775	69.88	2284 lm
5.76W	0365	365	14.37	470 lm	17.28W	1085	1085	42.72	1396 lm	28.80W	1805	1805	71.06	2323 lm
6.24W	0395	395	15.55	508 lm	17.76W	1115	1115	43.90	1435 lm	29.28W	1835	1835	72.24	2362 lm
6.72W	0425	425	16.73	547 lm	18.24W	1145	1145	45.08	1474 lm	29.76W	1865	1865	73.43	2400 lm
7.20W	0455	455	17.91	586 lm	18.72W	1175	1175	46.26	1512 lm	30.24W	1895	1895	74.61	2439 lm
7.68W	0485	485	19.09	624 lm	19.20W	1205	1205	47.44	1551 lm	30.72W	1925	1925	75.79	2477 lm
8.16W	0515	515	20.28	663 lm	19.68W	1235	1235	48.62	1589 lm	31.20W	1955	1955	76.97	2516 lm
8.64W	0545	545	21.46	701 lm	20.16W	1265	1265	49.80	1628 lm	31.68W	1985	1985	78.15	2555 lm
9.12W	0575	575	22.64	740 lm	20.64W	1295	1295	50.98	1667 lm	32.16W	2015	2015	79.33	2593 lm
9.60W	0605	605	23.82	779 lm	21.12W	1325	1325	52.17	1705 lm	32.64W	2045	2045	80.51	2632 lm
10.08W	0635	635	25.00	817 lm	21.60W	1355	1355	53.35	1744 lm	33.12W	2075	2075	81.69	2671 lm
10.56W	0665	665	26.18	856 lm	22.08W	1385	1385	54.53	1782 lm	33.60W	2105	2105	82.87	2709 lm
11.04W	0695	695	27.36	894 lm	22.56W	1415	1415	55.71	1821 lm					
11.52W	0725	725	28.54	933 lm	23.04W	1445	1445	56.89	1860 lm					

Driver Options


Constant Voltage for Linear Cover Lights

Microline Ø148141 Constant Voltage LED Adaptor Driver. 1 Driver for Maximum 2m long fixtures.

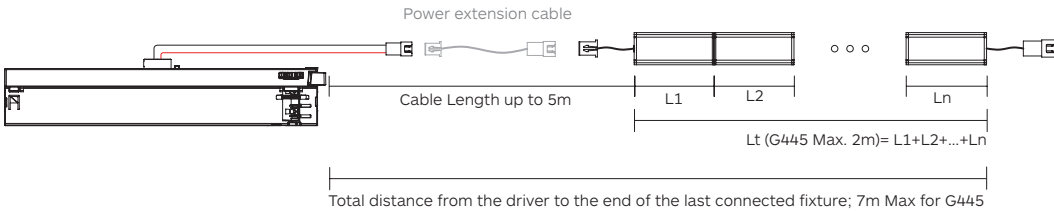

G445Power extension cable. Art. **2D58**. 1m (if necessary).

Optical Accessories



Product / Optical Accessories

Honeycomb Louvre
Colour 10

Canali Edge Zero 40

2E35

Canali Edge Zero 66


2C65

Canali Edge Zero 80

2F10

Canali

Edge Forms System

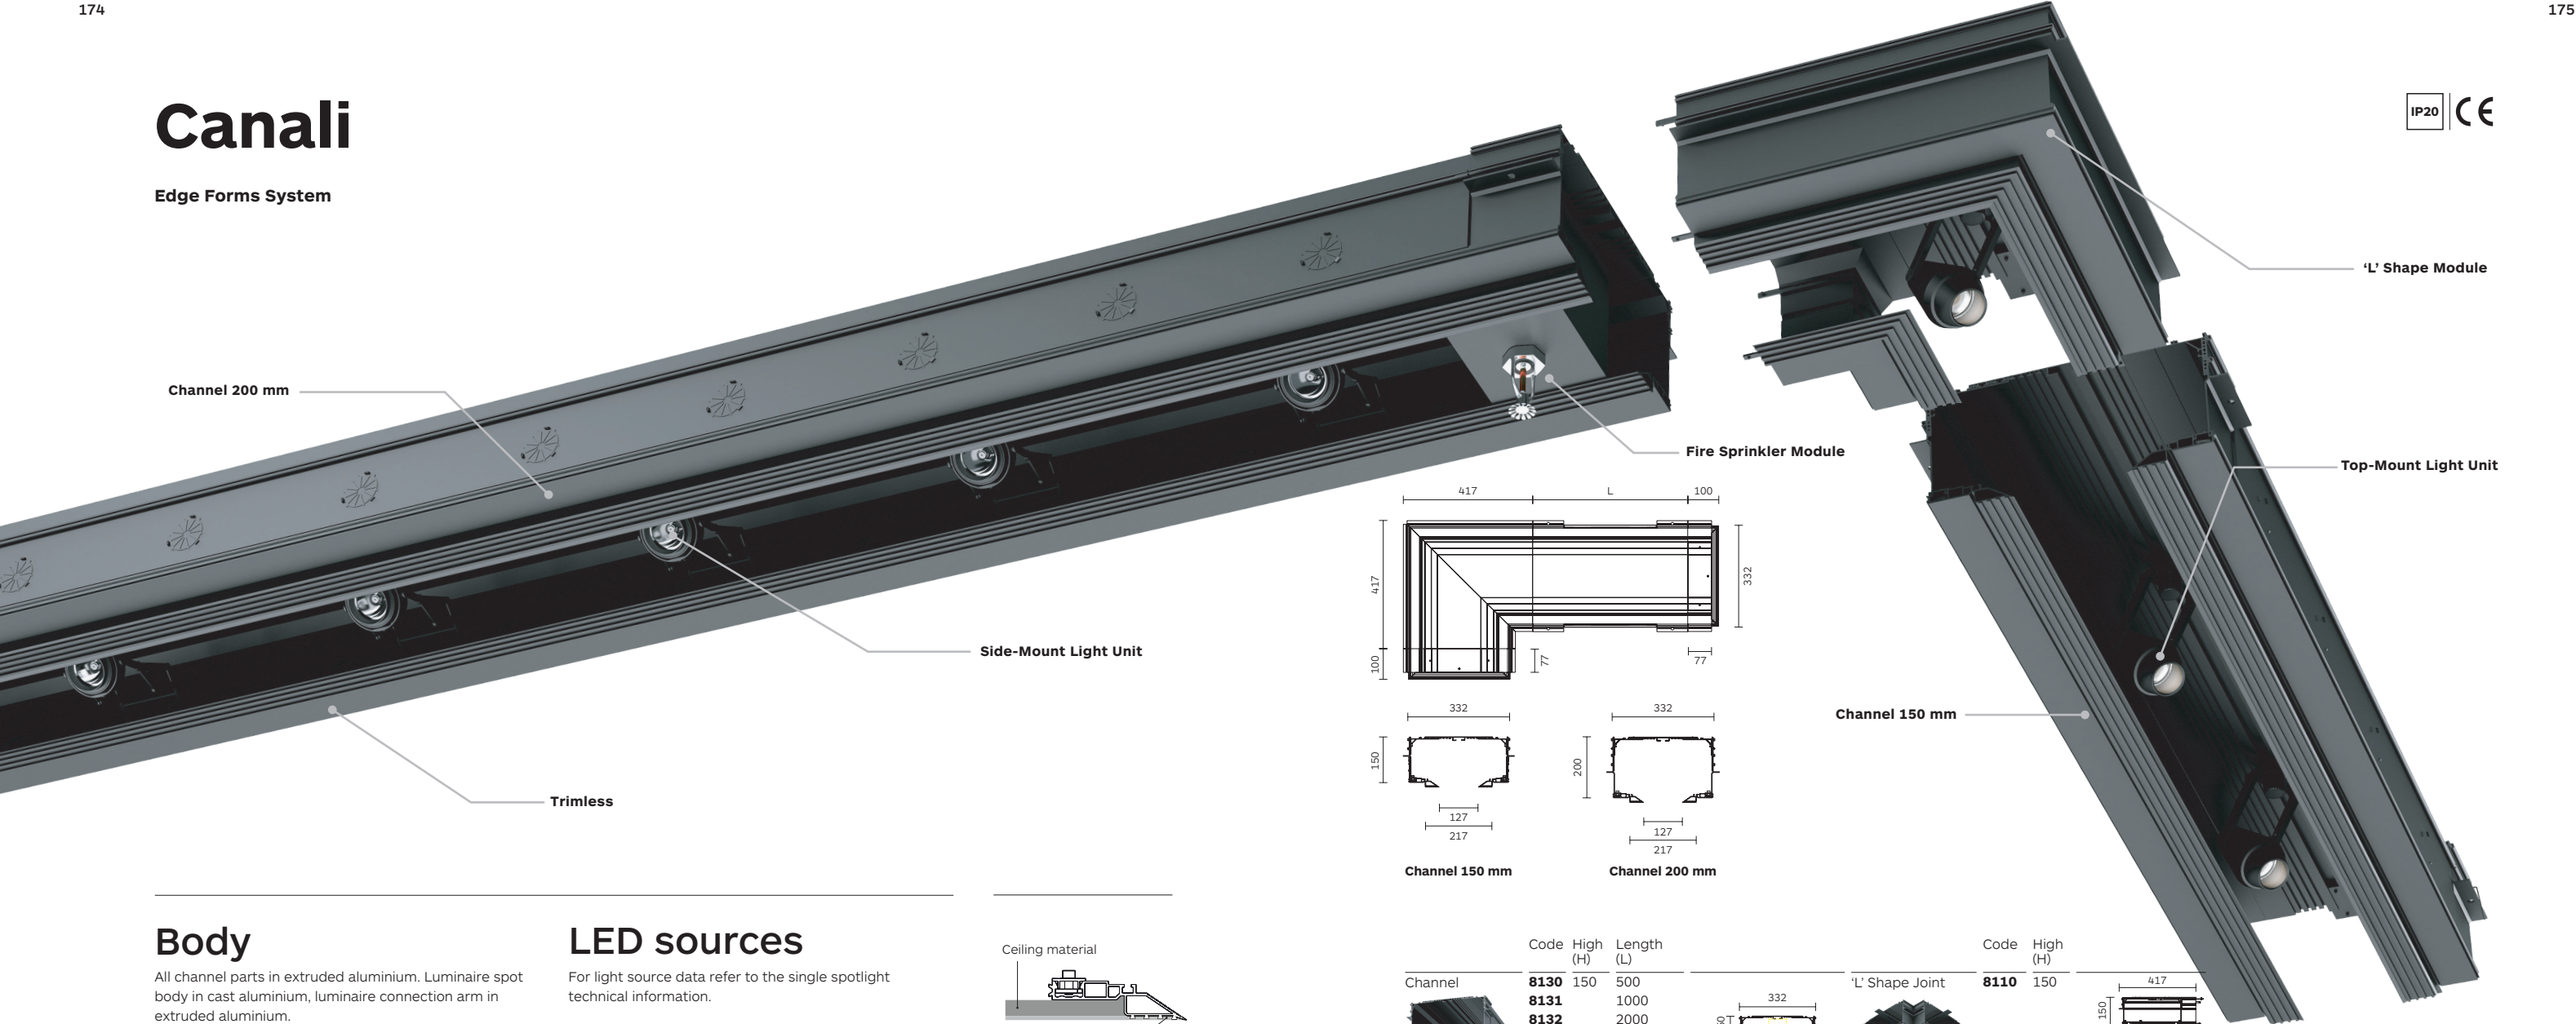

Body

All channel parts in extruded aluminium. Luminaire spot body in cast aluminium, luminaire connection arm in extruded aluminium.

Clean, unobtrusive trimless installation with above-ceiling suspension. Easy modular structure with 150mm, 200mm and 90° "L" unit.

The system is completed by traverse set, end set and end cover plate. 3 circuit track mounted inside the channel. Spotlight units are mounted on the top or side of channel interior.

Possibility to upgrade the system after the installation adding fixtures or circuits.

Accessories

Accommodation modules for: fire sprinklers, surveillance camera, HVAC diffuser, speakers, WiFi access point available upon request.

Finish

Powder coat in black (10) or Embossed matt black (65).

LED sources

For light source data refer to the single spotlight technical information.

Optic



Lens or reflector, according with the single spotlight technical information.

Driver

Driver not included or integrated, according with the chosen spotlight. Different dimming Options available on request.

Applications

A comprehensive range of multi-directional luminaires offered in a wide range of options, contained by a trimless display lighting system.
Application areas: retail, museums, galleries, exhibits, jewelry shops, residential, lift lobbies.

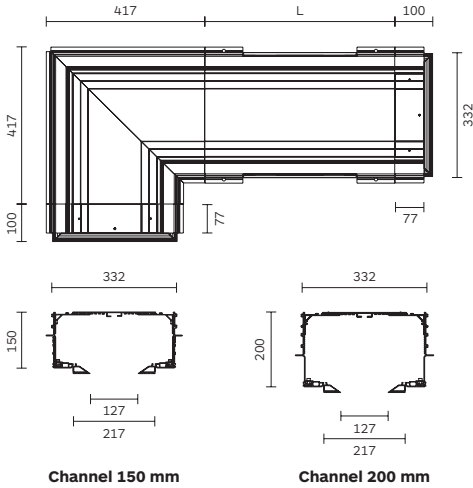

	Code	High (H)	Length (L)
Channel	8130	150	500
	8131		1000
	8132		2000
Traverse Set	8133	200	
	8134		
	8135		

	Code	High (H)	Length (L)
Traverse Set	8130	150	500
	8131		1000
	8132		2000
	8133	200	

	Code	High (H)	Length (L)
Traverse Set	8130	150	500
	8131		1000
	8132		2000
	8133	200	

	Code	High (H)	Length (L)
Traverse Set	8130	150	500
	8131		1000
	8132		2000
	8133	200	

	Code	High (H)	Length (L)
Traverse Set	8130	150	500
	8131		1000
	8132		2000
	8133	200	

	Code	High (H)	Length (L)
Traverse Set	8130	150	500
	8131		1000
	8132		2000
	8133	200	

	Code	High (H)	Length (L)
Traverse Set	8130	150	500
	8131		1000
	8132		2000
	8133	200	


	Code	High (H)	Length (L)
Traverse Set	8130	150	500
	8131		1000
	8132		2000
	8133	200	

Spotlights Side Mounted





Canali Micro Gimbal

Side mounted

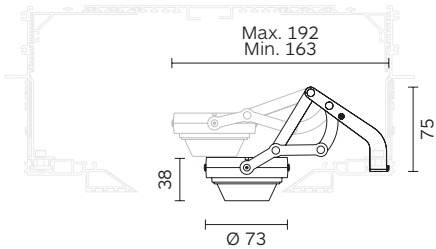


Canali Gimbal

Side mounted

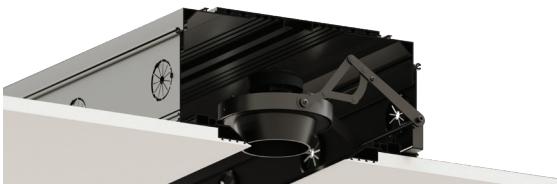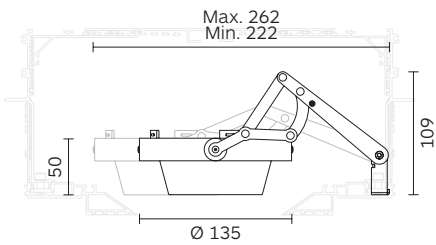

Canali Zero 66

Side mounted

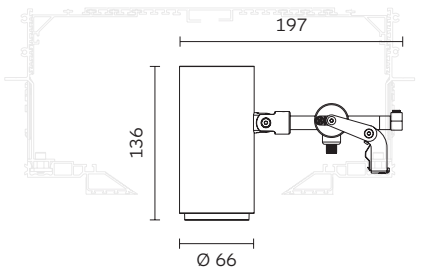

Code ordering example: 8 3 0 1 G U 5 3 - 0 0 0 0 0 D 0 1 0

	Product code	Light source code		>CRI	CCT**	LED power	Nominal lumen	Beam angle (BA°)	Driver Options	Finish
Canali Micro Gimbal	8301	GU53 Retrofit	MR16-GU5.3	00	00	/	/	00	D0 No Dim	10 ■ Black 65 ■ Matt Black
Canali Gimbal	8303	AR11	AR111-G53	00	00	/	/	00		
Canali Zero 66	8401	BC22 COB LED		90	30 3000K 40 4000K	22W	2422 lm 2577 lm	16 / 30 / 60	D0 No Dim DA Dali Dim DP Phase Dim DC CASAMBI D1 1-10V Dim	


Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
Transformer and driver are not included. To be ordered separately.
For the most updated product information, please go to our website.

Spotlights Top Mounted




Canali Mini Swinger

Top mounted

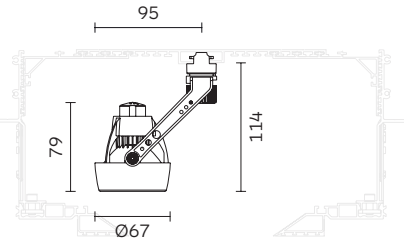

Canali Micro Conos

Top mounted

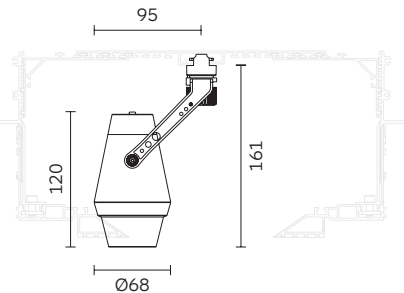

Code ordering example: 8 3 0 7 G U 5 3 - 0 0 0 0 0 D 0 1 0

	Product code	Light source code*		>CRI	CCT**	LED power	Nominal lumen	Beam angle (BA°)	Driver Options	Finish
Canali Mini Swinger	8307	GU53 Retrofit	MR16-GU5.3	00	00	/	/	00	D0 No Dim	10 ■ Black 65 ■ Matt Black
Canali Micro Conos	8309	AR11	AR111-G53	00	00	/	/	00		

Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
Transformer not included. To be ordered separately.
For channel height 150 mm only.
For the most updated product information, please go to our website.

Outdoor Lighting

Outdoor Lighting

Linear

Cobra Pro IP66
Fixed



194

Cobra Pro IP66
Adjustable



196

Ceiling / Wall Recessed

Scala



188

New

Logica 42
Recessed



200

Bullet
Recessed



202

Pendant / Surface Mounted


Pixo Retro
Catenary



183

New

Pixo Catenary



183

New

Bullet
Floodlight



204

Logica
Surface



206

GirasoLED
Round



210

GirasoLED
Square



210

Pixo Catenary

25 | 38

- 10 - Black
- 65 - Embossed matt black



Discreet, robust, and compact, the Pixo Catenary system consists of Pixo Retro Catenary features a classic filament look and Pixo Catenary a modern compact spotlight design.

The Pixo Catenary system offers luminaires with diameters of 25mm and 38mm and weights of approximately 100 grams each. There are no extra clunky power cables or typical catenary clutter, so the system is streamlined and simple. The Pixo Catenary system also requires minimal tension for mounting, reducing engineering complexity and project time.

Large public spaces, outdoor cafés, restaurants, and parks are ideal for indoor and outdoor applications.

For complete code ordering information, please see pages 214-215.

LED Sources:



Pixo Retro Catenary
Ambient light:
CRI: 80 | CCT: 2200K

Pixo Catenary
Spot light:
CRI: 90 | CCT: 3000K
Other CCT options: 2700K, 3500K, 4000K

Accessories:

- Suspension & Power Cable
 - Catenary plate mount
 - Eyebolt mount with concrete anchor screw
 - Pole / Tree Mounted
 - Waterproof connector
- See pages 184-185.

Pixo Catenary IP66

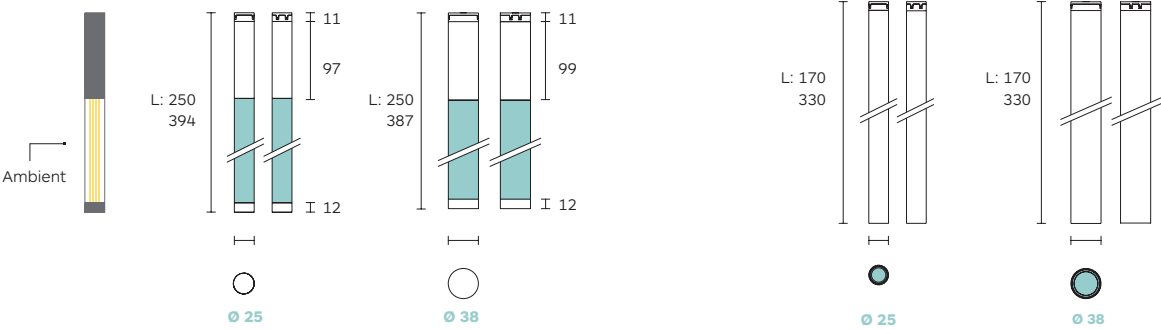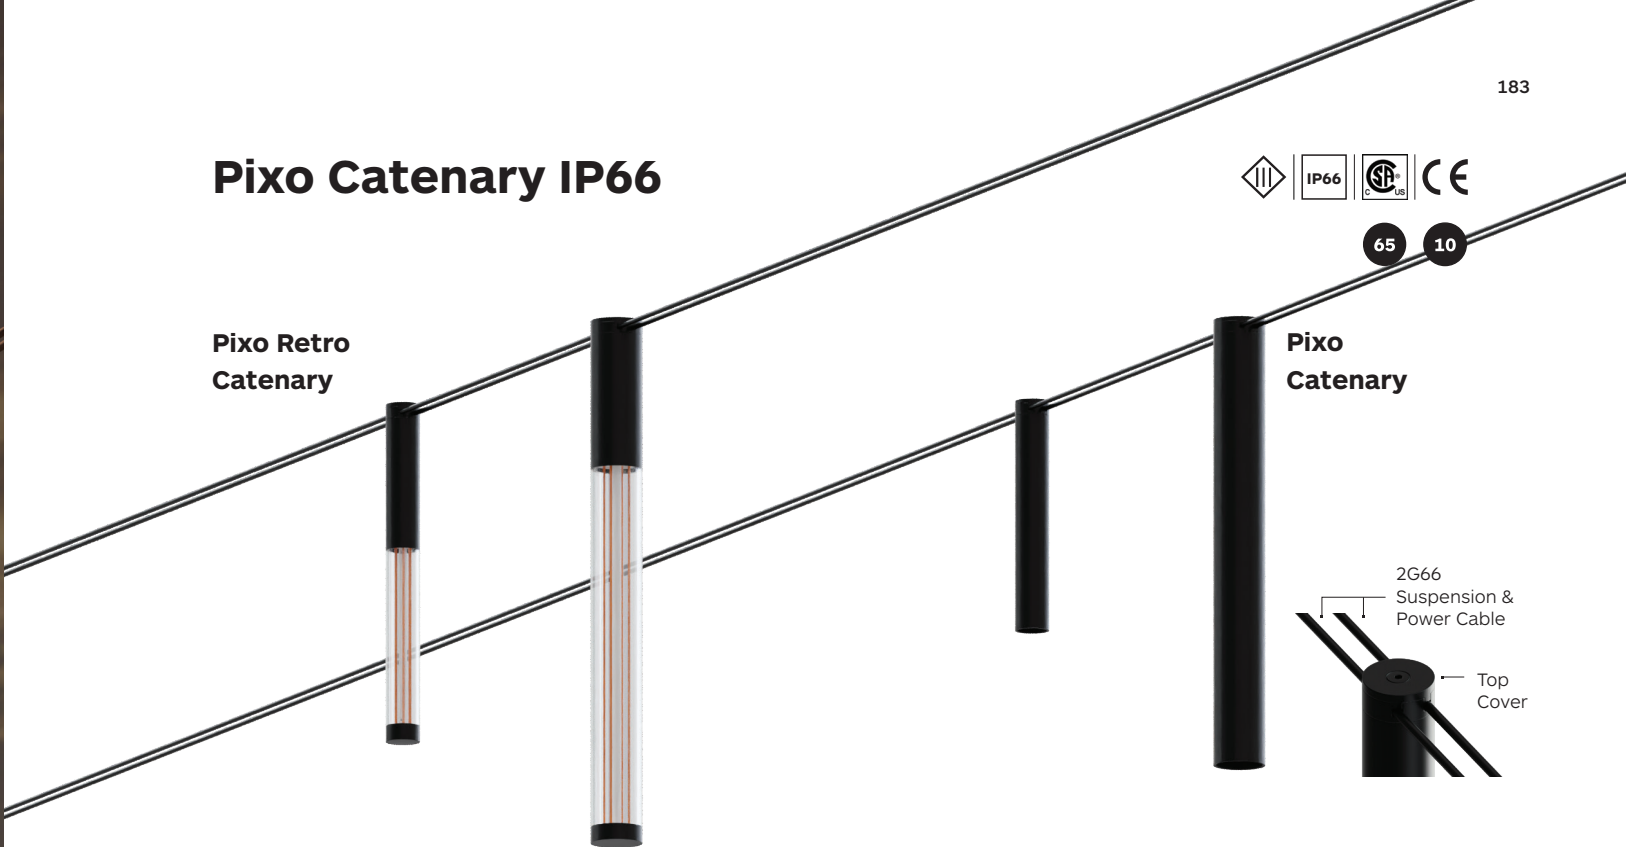



		Product Code	Light Source Code	LED Power	Nominal Lumen	Beam Angle	Dimming Options	CCT Options
CRI>80 2200K	Pixo Retro Catenary 25 L:250	7316	BW11	4.9W	397 lm	/	D0 No Dim	22 2200K
	Pixo Retro Catenary 25 L:394	7317						
	Pixo Retro Catenary 38 L:250	7322		4.9W	397 lm			
	Pixo Retro Catenary 38 L:387	7323						

CRI>90 3000K	Pixo Catenary 25 L:170	7312	BR21	2.8W	333 lm	15° / 20° / 32°	27	2700K
	Pixo Catenary 25 L:330	7313					30	3000K
	Pixo Catenary 38 L:170	7318	BC35	3.6W	426 lm	20° / 26° / 36°	35	3500K
	Pixo Catenary 38 L:330	7319					40	4000K



Accessories




Product / Accessories	Catenary plate mount Available in colour 84
Pixo Catenary	2G26
Pixo Retro Catenary	

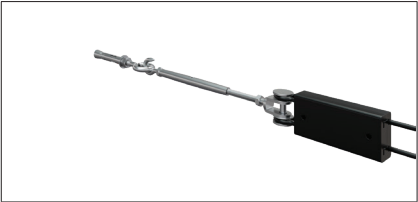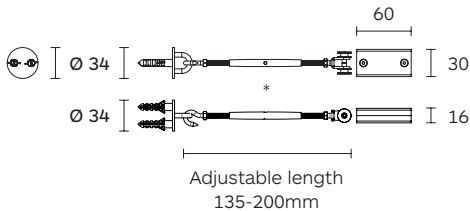


Product / Accessories	Eyebolt mount with concrete anchor screw Available in colour 84
Pixo Catenary	2G28
Pixo Retro Catenary	

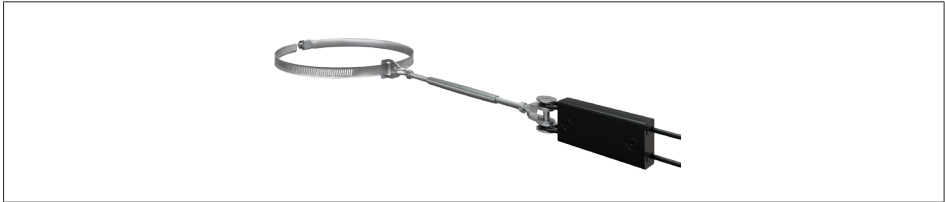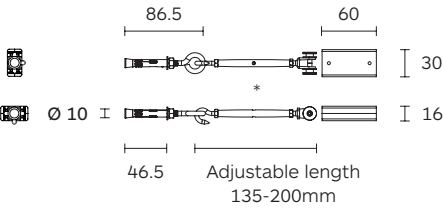

Product / Accessories	Tree or Pole mount Available in colour 84
Pixo Catenary	2G27
Pixo Retro Catenary	

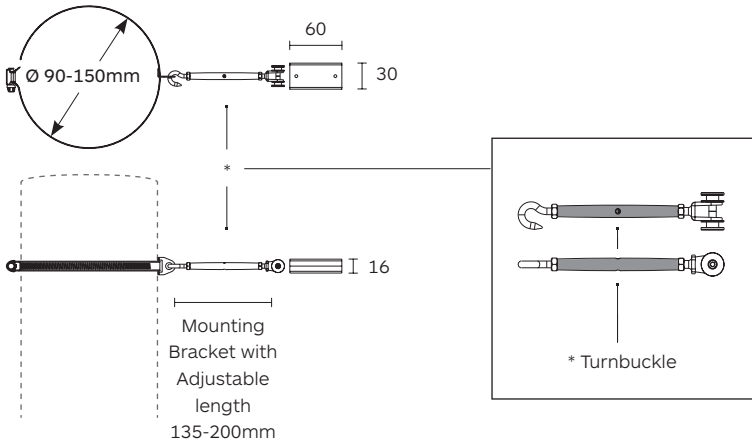


Accessories

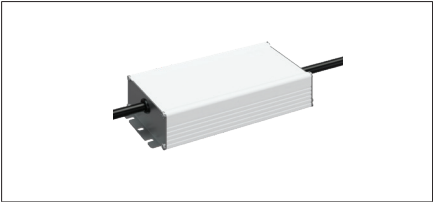


Product / Accessories	Power supply IP67 AC/DC Power, 220-240VAC input, 24VDC 150w output
Pixo Catenary	2G29 *
Pixo Retro Catenary	

* IP connectors are included with PSU Art#2G29.


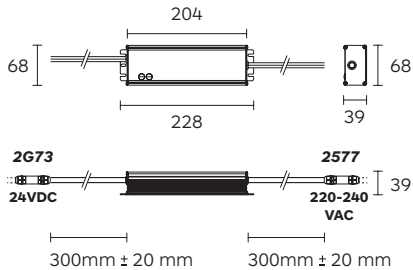


Product / Accessories	Waterproof connector IP68 For 220-240VAC input
Pixo Catenary	2577*
Pixo Retro Catenary	


* For outdoor applications, it is mandatory to use 2577 & 2G73.



Product / Accessories	Waterproof connector IP68 For 24VDC output
Pixo Catenary	2G73*
Pixo Retro Catenary	

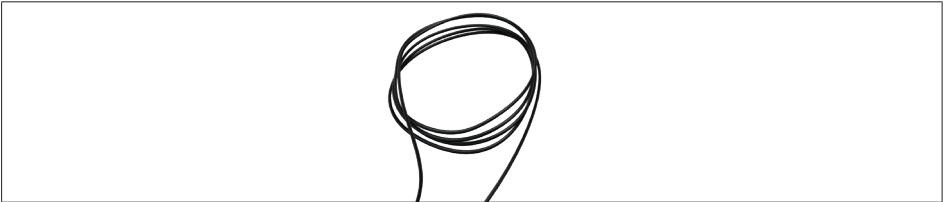

Product / Accessories	Suspension and Power Cable Available in colour 10
Pixo Catenary	2G66
Pixo Retro Catenary	

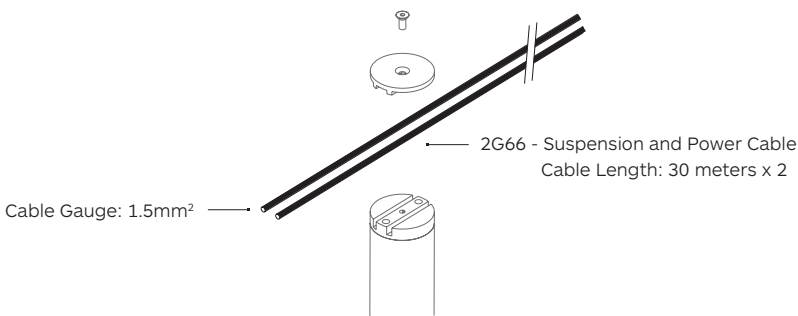


Installation Guideline

Pixo Catenary system can support up to 25 meters of point-to-point suspension cables.
The suspension cables are connected directly to a 24VDC power supply with a maximum power of 150W.

The maximum distance between the power supply and the last Pixo Catenary fixture can be 28m, assuming you use a Ø3mm, 1.5mm² cable and the max total weight load on the cables is 3.5kg.

Please refer to the weight and power table on the right to ensure that the total number of fixtures will not exceed the total power and weight limits.

Product Name	Product Code	Fixture Weight	LED Power	Max. Number of Units
Pixo Retro Catenary 25 L:250	7316	107g	4.9W	20 pcs
Pixo Retro Catenary 25 L:394	7317	135g	4.9W	20 pcs
Pixo Retro Catenary 38 L:250	7322	201g	4.9W	17 pcs
Pixo Retro Catenary 38 L:387	7323	263g	4.9W	13 pcs
Pixo Catenary 25 L:170	7312	122g	2.8W	20 pcs
Pixo Catenary 25 L:330	7313	200g	2.8W	17 pcs
Pixo Catenary 38 L:170	7318	237g	3.6W	14 pcs
Pixo Catenary 38 L:330	7319	360g	3.6W	9 pcs

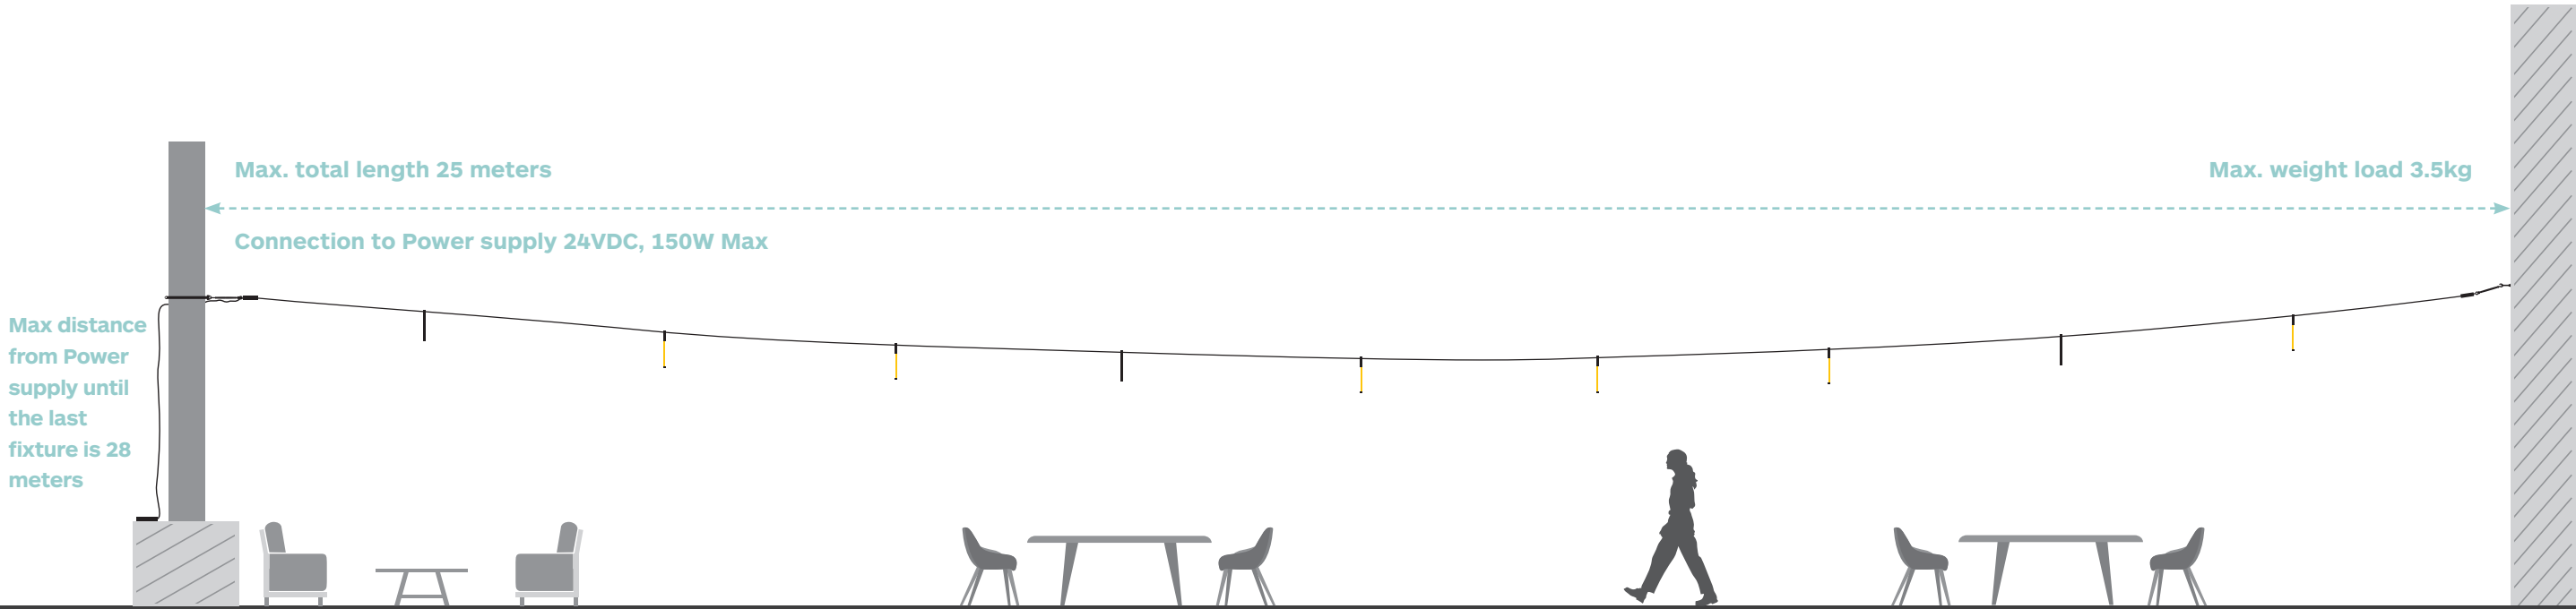

Pixo Catenary works with standard 24VCD power supply units, for optimal results designated 24VDC Power Supply model **HLG-150H-24** is recommended.

Scala



Body

Scala is a miniature weatherproof LED notes, made of 316 stainless-steel designed to be installed inside curved surfaces such as handrails and poles or flat in flat architectural surfaces.

Scala offers neat solution for handrail light, easy and fast installation and long lasting.

Mounting Options:
Recessed
For Curved surfaces Min (Ø35mm)

Accessories

IP68 connectors included.
Drill Jig 2F60 to be ordered separately.
Check page 192 for details.

Finish

Stainless steel (84).
Other finish options on request.

LED sources

High Efficacy.
CRI: 80 | CCT: 2700K, 3000K, 3500K, 4000K.
Other CRI and CCT options available on request.

Optic

Wide beam Symmetric.
Wide beam Asymmetric.
Spot Lens - 29° / 33° / 54° / 60°. Elliptical Beam 29° x 44°.


Driver

Remote driver not included.


Applications

Simple compact design makes Scala an ideal solution for today's architectural design; weatherproof design and compact form faction to be integrated in various architectural structure.
Application are: Handrail, walkways, entrances.


Scala Symmetrical



Scala Asymmetrical





Scala Optica




Scala Symmetric



Scala Symmetrical Curved

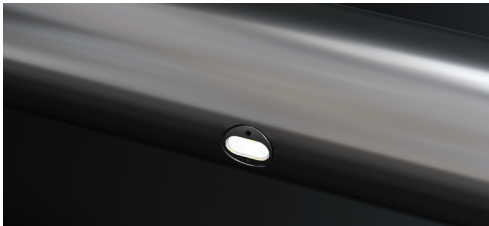

Scala Symmetrical Flat



Code ordering example: **3 6 5 8 B R 1 1 - 8 0 3 0 0 0 D 0 8 4**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Scala Symmetrical Curved	3658	BR11 High Efficacy	80	30 3000K	1.3W	204 lm	00	D0 No Dim	84 Stainless Steel
				40 4000K		226 lm		DA Dali Dim	
Scala Symmetrical Flat	3661							DP Phase Dim	
								DC CASAMBI	
								D1 0-10V Dim	

Notes:

* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For related accessories, please see page 192.




EW = Extra Wide. Ordering code; **00**.

Scala Asymmetric



Scala Asymmetrical Curved

Scala Asymmetrical Flat

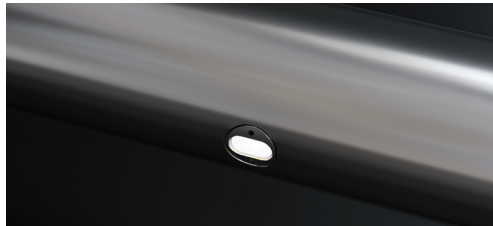

Code ordering example: 3 6 5 7 B R 1 1 - 8 0 3 0 W W D 0 8 4

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Scala Asymmetrical Curved	3657	BR11 High Efficacy	80	30 3000K	1.3W	204 lm	WW	D0 No Dim	84 Stainless Steel
				40 4000K		226 lm		DA Dali Dim	
Scala Asymmetrical Flat	3662							DP Phase Dim	
								DC CASAMBI	
								D1 0-10V Dim	

Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For related accessories, please see page 192.




WW = Wallwasher optics. Ordering code; **WW**.

Scala Optica



Scala Optica Curved

Scala Optica Flat

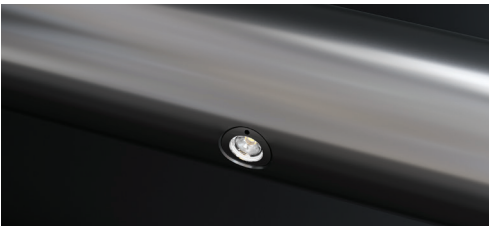


Code ordering example: 3 6 6 0 B R 1 1 - 8 0 3 0 2 9 D 0 8 4

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Scala Optica Curved	3660	BR11 High Efficacy	80	30 3000K	1.3W	204 lm	29 / 33 / 54 / 60 / EL	D0 No Dim	84 Stainless Steel
				40 4000K		226 lm		DA Dali Dim	
Scala Optica Flat	3663							DP Phase Dim	
								DC CASAMBI	
								D1 0-10V Dim	

Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For related accessories, please see page 192.

EL = Elliptical Beam (29° x 44°). Ordering code; **EL**.

Accessories

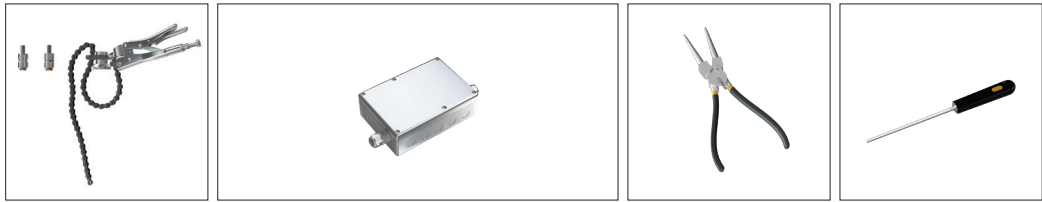

Product / Accessories	Drill Jig	Driver	Sharp-nozzle circlip pliers	Round Rasp
		IP66		
		Input: 220-240V 50/60Hz. Output: 2-50Vdc 400mA Max.20W. 1 Driver for Maximum 15 pcs fixtures.		

Scala Symmetrical Scala Asymmetrical Scala Optica	2F60	2F63	2F64	2F65
	15mm Cutter			
	16mm Cutter			



Scala

Image credits: formalighting's Design Department

Cobra Pro IP66

Fixed

Surface mounted LED modular system in die cast aluminium. Available in different length configurations based on a 83mm link (2 LEDs per link) with a 76mm increments. Section 34x36.6mm. Its flexible structure maintains a constant 38mm pitch between the LEDs.

For complete code ordering information, please see pages 214-215.



Mounting options:

- Mounting U Clip
Mounting options are included.

Accessories:


- Louvre
For more information, please see page 199.

LED Sources:


High Rendering:
CRI: 75 | CCT: 2100K, 2400K
CRI: 90 | CCT: 2700K, 3000K, 3500K, 4000K

- 10 - Black
- 65 - Embossed matt black
- 11 - White
- 54 - Embossed matt white
- 29 - Grey (Outdoor)

Cobra Pro IP66 Fixed




Accessories:




Mounting Options:


Mounting U Clip



G301 without honeycomb

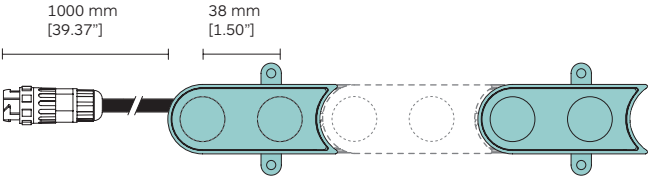

G306 with honeycomb

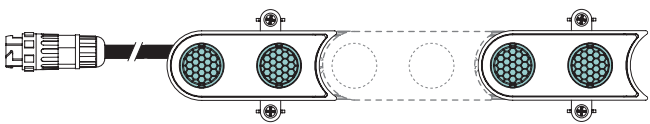

		Product Code	Length Code	CCT Options		LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	
<div>CRI > 90</div> <div>High Rendering</div>	Cobra Pro IP66 Fixed	G301	Min. 0083	27	2700K	1.5W/LED	183 lm/LED	17° / 29° / EL / WW	D0	No Dim
		G306	⋮	30	3000K				D1	0-10V Dim
			Max. 1023	35	3500K				DA	Dali Dim
				40	4000K					
				21	2100K					173 lm/LED
				24	2400K					

For complete list of length codes, please see page 198.
For other CCT options, please contact us.

¹ To be ordered separately.
EL = Elliptical Beam (15° x 50°). **WW** = Wallwasher optics.

Recommended Driver: Driver included.

Cobra Pro IP66

Adjustable

Surface mounted LED modular system in die cast aluminium. Available in different length configurations based on a 83mm link (2 LEDs per link) with a 76mm increments. Section 31.9x32.6mm. Its flexible structure maintains a constant 38mm pitch between the LEDs.

For complete code ordering information, please see pages 214-215.



Mounting options:

- Adjustable Brackets
Mounting options are included.

Accessories:


- Louvre
For more information, please see page 199.

LED Sources:


High Rendering:
CRI: 75 | CCT: 2100K, 2400K
CRI: 90 | CCT: 2700K, 3000K, 3500K, 4000K

- 10 - Black
- 65 - Embossed matt black
- 11 - White
- 54 - Embossed matt white
- 29 - Grey (Outdoor)

Cobra Pro IP66 Adjustable




Accessories:

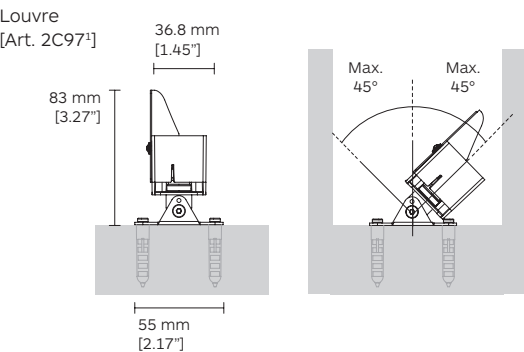


Mounting Options:

Adjustable Brackets

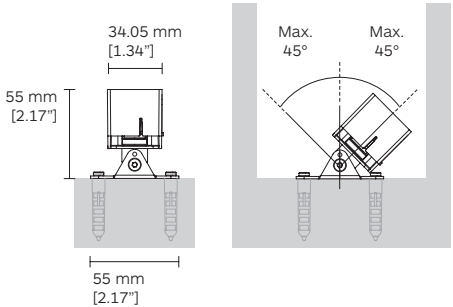


G302
without
honeycomb

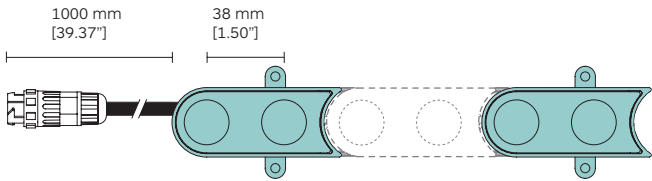

Min.: 83 mm [3.27"], 2 LEDs, 1 Link
Max.: 1223 mm [48.15"], 32 LEDs, 16 Links

G307
with
honeycomb



		Product Code	Length Code	CCT Options		LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	
<div>CRI > 90</div> <div>High Rendering</div>	Cobra Pro IP66 Adjustable	G302	Min. 0083	27	2700K	1.5W/LED	183 lm/LED	17° / 29° / EL / WW	D0	No Dim
		G307	⋮	30	3000K				D1	0-10V Dim
			Max. 1223	35	3500K				DA	Dali Dim
				40	4000K					
			21	2100K					173 lm/LED	
				24	2400K					

For complete list of length codes, please see page 198.
For other CCT options, please contact us.

¹ To be ordered separately.
EL = Elliptical Beam (15° x 50°). **WW** = Wallwasher optics.


Recommended Driver: Driver to be ordered separately. Work with 24VDC Constant Voltage LED Driver positioned remotely. Suggested Driver: 2V24D0, 2V24D1, 2V24DA. Please see page 199 for further information.

Complete Length Codes List


Cobra Pro IP66 Fixed | Cobra Pro IP66 Adjustable

G301 | G306


G302 | G307

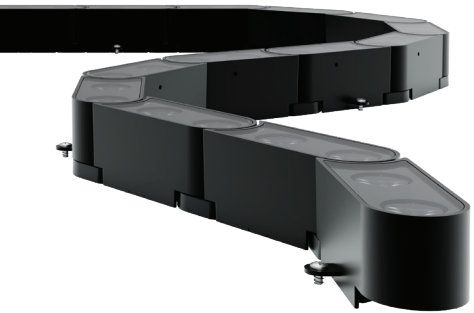



Cobra Pro IP66 Fixed




G301 without honeycomb

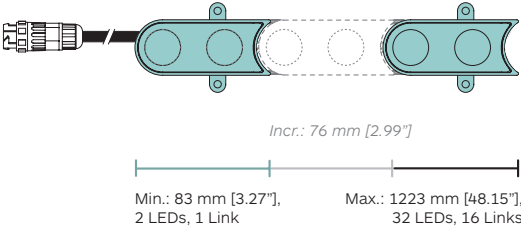


G306 with honeycomb

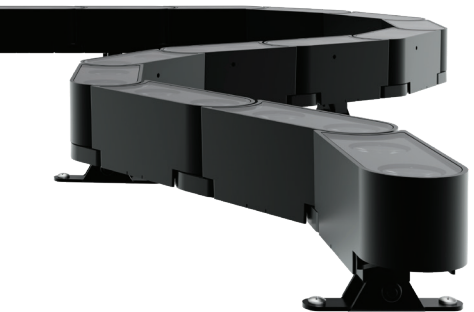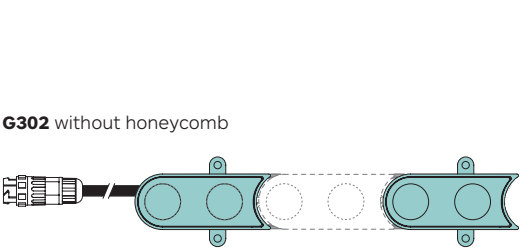

Cobra Pro IP66 Adjustable



G302 without honeycomb

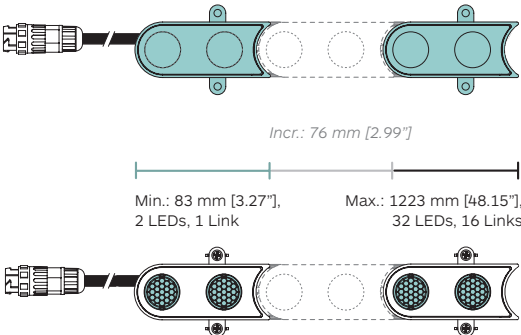

G307 with honeycomb

Available length codes ¹


No. of Links	LED Power	Length Code	Length in mm	Length in inches	Nominal Lumen	No. of Links	LED Power	Length code	Length in mm	Length in inches	Nominal Lumen
1	3.1W	0083	83	3.26	366 lm	9	28.3W	0691	691	27.20	3294 lm
2	6.3W	0159	159	6.25	732 lm	10	31.5W	0767	767	30.19	3660 lm
3	9.4W	0235	235	9.25	1098 lm	11	34.6W	0843	843	33.18	4026 lm
4	12.6W	0311	311	12.24	1464 lm	12	37.8W	0919	919	36.18	4392 lm
5	15.7W	0387	387	15.23	1830 lm	13	40.9W	0995	995	39.17	4758 lm
6	18.9W	0463	463	18.22	2196 lm	14	44.1W	1071	1071	42.16	5124 lm
7	22W	0539	539	21.22	2562 lm	15	47.2W	1147	1147	45.15	5490 lm
8	25.2W	0615	615	24.21	2928 lm	16	50.4W	1223	1223	48.14	5856 lm

¹ Information in the chart above is related to 3000K LED.


Driver Options

Constant Current


Cobra Pro IP66 | G301 / G302

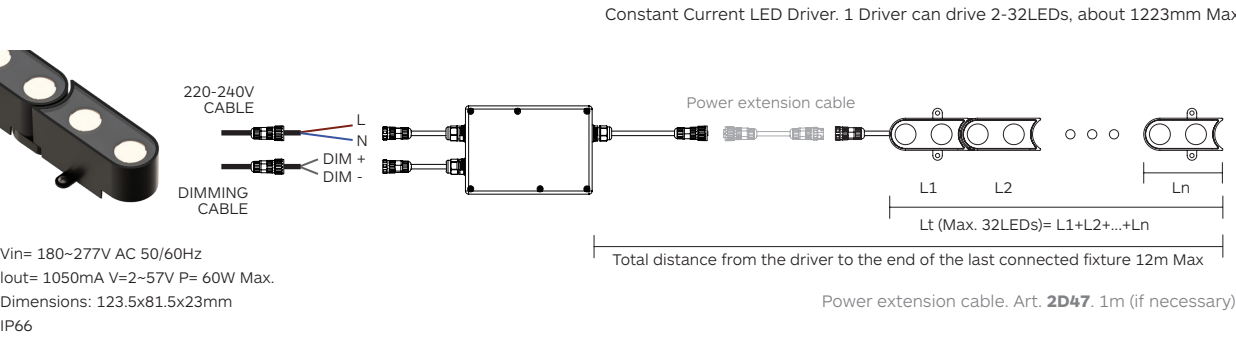

Cobra Pro IP66 with honeycomb | G306 / G307

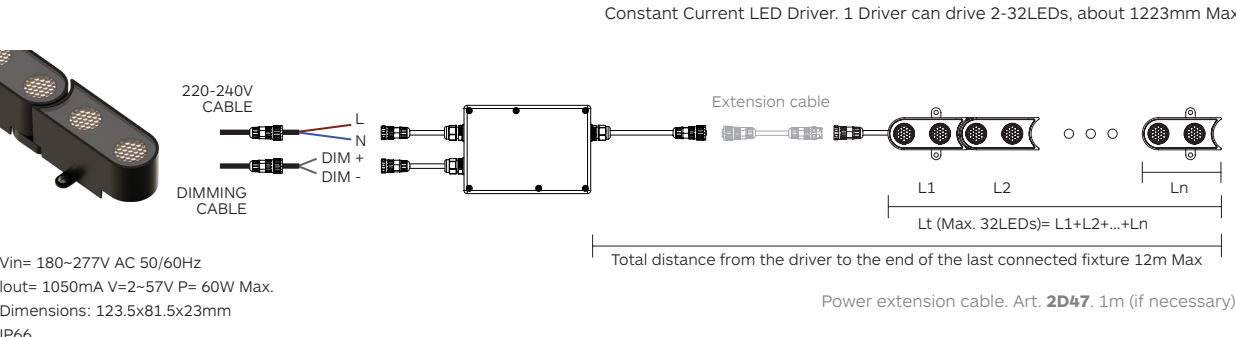

Accessories

Product / Accessories		
	Louvre Colours 10, 65	Extension cable 1000mm long
Cobra Pro IP66 Fixed	2C97	2D47
Cobra Pro IP66 Adjustable		

* Please refer to the user manuals for further details.

Logica

Ceiling recessed downlight



Body

Logica is a round recessed outdoor ceiling lighting featuring minimal glare and light dispersion, housing in aluminum extrusion.

It integrates toughened safety glass and a weatherproof long-lasting silicone gasket that guarantees durability and excellent dust and water protection (IP66).

Easy installation via clamping wings for ceiling thickness 1 to max 30mm, with aluminum or stainless trim.

Accessories

Honeycomb Louvre, T Joint Connectors, Extension Cable. Check page 201 for details.

Finish

Superior Polyester powder coat in black (10), Embossed matt black (65), grey (29) or Stainless Steel (84).

LED sources

SMD LED
CRI: 90 | CCT: 3000K, 4000K.
Other CRI and CCT options available on request.

Optic

Lens.
Beam Angle: Narrow / Medium / Wide.

Driver

Remote power supply not included, to be ordered separately.
Product operates on 24V DC Driver (IP67 Driver).

Applications

Application areas: Canopies, entrances, warehouses, garages, facades, gardens, residential.

Related Products

Logica
Surface

P. 206


Logica

DC
24V



IP66

IK06

CE

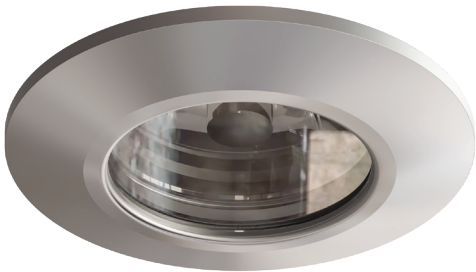

Logica 42
Recessed

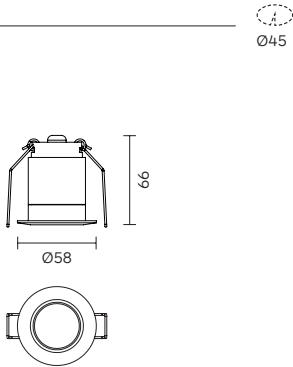

Code ordering example: **R Q 0 6 B R 2 1 - 9 0 3 0 0 7 D 0 1 0**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Logica 42 Recessed	RQ06	BR21	High Power LED	90	30 3000K	410 lm	07	D0 No Dim	10 ■ Black
				40 4000K		480 lm			65 ■ Matt Black
									29 ■ Grey
									84 ■ Stainless Steel

Accessories

Product / Accessories	Honeycomb Louvre	T Joint Connectors	Extension signal cable
	Available in colour 10	Available in colour 10	IP67 L : 1000mm / 2000mm
		IP67	
Logica 42 Recessed	2390	2E60	2E61

Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.

Bullet

Ceiling recessed uplight



Body

Recessed mounted luminaire with light housing in aluminum extrusion. Inclusive of toughened safety glass, weatherproof durable silicone gasket and external screws made of stainless steel. Ring and back plug cover in cast aluminum.

Front cover designed to avoid accumulation of dust and water.

Recessed ceiling installation via clamping wings for ceiling thickness 1 to max. 30mm.

Accessories

N/A

Finish

Superior polyester powder coat in black (10), Embossed matt black (65), or grey (29).

LED sources

COB.
CRI: 80 | CCT: 3000K, 4000K.
Other CRI and CCT options available on request.

Optic

Lens.
Beam Angle: Narrow / Medium / Wide.

Driver

Supplied with remote non-dimmable driver.
Dimming Options: 0-10V Dim, DALI, Phase, CASAMBI.
220-240V 50/60Hz.

Applications

Versatile luminaire, Bullet recessed provides a pleasant illumination with a high level of lumen. The ideal solution in moist environments such as swimming pools or garages. Application areas: canopies, entrances, warehouses, garages.


Related Products


**Bullet
Floodlight**
P.204





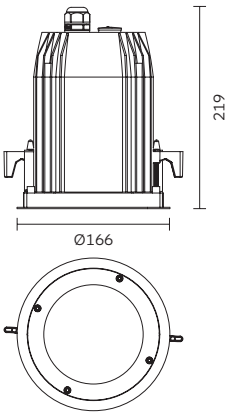
Bullet



Bullet 127
Recessed  Ø118



Bullet 166
Recessed  Ø158



Code ordering example: **3 4 9 9 B B 1 2 - 8 0 3 0 1 4 D 0 1 0**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Bullet 127	3499	BB12 COB LED	80	30 3000K	14W	2152 lm	14 / 22 / 32	D0 No Dim	10 ■ Black
				40 4000K		2220 lm		DX DMX	65 ■ Matt Black
Bullet 166	3497	BB13 COB LED			20W	3067 lm	16 / 28 / 40	DA Dali Dim	29 ■ Grey (Outdoor)
						3170 lm		D1 0-10V Dim	
								DP Phase	
								DC CASAMBI	

Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.

Bullet

Surface Mounted



Body

Surface mounted luminaire with light body, luminaire base and brackets in aluminum extrusion. Inclusive of toughened safety glass, weatherproof durable silicone gasket and external screws made of stainless steel.

Front cover designed to avoid accumulation of dust and water.

Surface version tiltable vertically 0°-140° and rotatable horizontally 350°, inclusive of mechanical locking system to ensure aiming stability.

Accessories

Coloured filters, linear spread, Visor, spikes.

Check page 205 for details.

Finish

Superior polyester powder coat in black (10), Embossed matt black (65), or grey (29).

LED sources

COB.
CRI: 80 | CCT: 3000K, 4000K.
Other CRI and CCT options available on request.

Optic

Lens.
Beam Angle: Narrow / Medium / Wide.

Driver

Supplied with integrated non-dimmable driver.
Dimming Options Surface: 0-10V, Phase.
220-240V 50/60Hz.

Applications

Versatile luminaire offering accent illumination to enhance elements of the outdoor landscape. The visor shield protects the environment from unpleasant bright light.
Application areas: facades, gardens, signboards, sculptures, residential.

Related Products

Bullet Recessed




P.202


Bullet




Extendable pole available for all the range.



Bullet 89
Floodlight



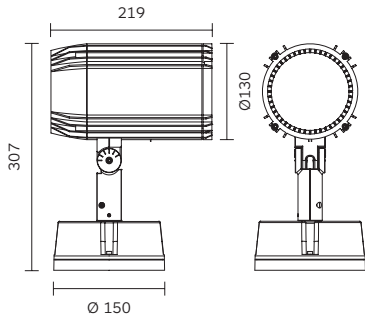



Bullet 130
Floodlight



Code ordering example: **3 4 9 8 B B 1 2 - 8 0 3 0 1 4 D 0 1 0**

	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Bullet 89	3498	BB12	COB LED	80	30 3000K 40 4000K	14W 2152 lm 2220 lm	14 / 22 / 32	D0 No Dim D1 0-10V Dim	10 ■ Black 65 ■ Matt Black
Bullet 130	3496	BB13	COB LED		20W	3067 lm 3170 lm	16 / 28 / 40	DP Phase	29 ■ Grey (Outdoor)

Accessories

Product / Accessories	Coloured Filters	Linear Spread	Visor	Spike
	 Colours 25, 42, 55, 85	 Colour 41	 Colours 10, 65	 Colour 10
Bullet 89	2607	2608	2328	2330 / 2322
Bullet 130	2610*	2609	2329	2330

In plastic.
• H: 235 for code 2330.
• H: 230 for code 2322.
The 50mm upper part must stay above ground level according to standards.

Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
* Available only for white colour version.

Logica

Surface mounted 42



Body

Accent floodlights with body in stainless steel (AISI 316), inclusive of toughened safety glass and weatherproof durable silicone gasket. Front cover is designed to avoid accumulation of dust and water.

Tiltable vertically 0°-90° and rotatable horizontally 0°-350°.

LED sources

High Power LED.
CRI: 90 | CCT: 3000K, 4000K.
Other CRI and CCT options available on request.

Related Products

Logica
Recessed

P.200

Optic

Reflector.
Beam Angle: Narrow / Medium / Wide.

Accessories

Spikes, Honeycomb Louvre, DALI Dimmable Driver, T Joint Connectors.
Check page 208 for details.

Finish

External finish in stainless steel (AISI 316).

Driver

Work with 24V DC power supply unit positioned remotely.
Power supply unit not included to be ordered separately.

Applications

Floodlights with a subtle and comfortable light emission. Ideal solution for a proper illumination of outdoor green areas and sculptures. The earth spike allows a portable and temporary use.
Application areas: trees, landscapes, gardens, golf courses, pathways, billboards, sculptures.

Logica

DC
24V




IP66

IK06

CE

Logica 42

Surface Mounted

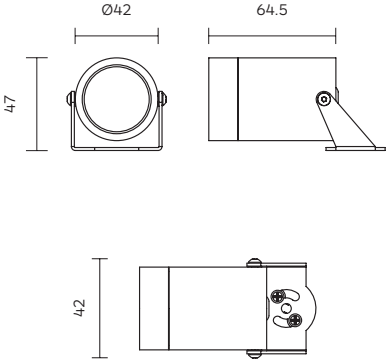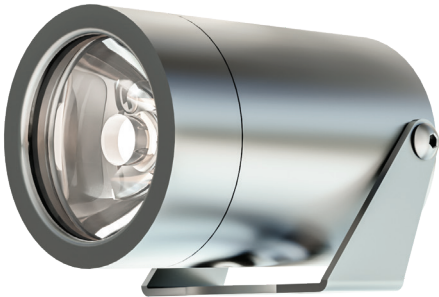




Code ordering example: **3 6 1 3 B R 2 1 - 9 0 3 0 0 7 D 0 8 4**



	Product Code	Light Source Code*	>CRI	CCT**	LED Power	Nominal Lumen	Beam Angle (BA°)	Driver Options	Finish
Logica 42	3613	BR21	High Power LED	90	30 3000K	4W	410 lm	07 No Dim	84 Stainless Steel
				40 4000K			480 lm		

Recommended Driver: Driver to be ordered separately. Work with 24VDC LED Driver positioned remotely.
Suggested Driver: 2V24D0.

Notes:
* For complete code ordering information, please see pages 214-215.
** For other CCT options, please contact us.
For related accessories, please see page 300.


Accessories

Product / Accessories			
	Honeycomb Louvre	Spike	Power Supply
	Available in colour 10	Available in colour 10 In plastic.	IP67 AC/DC 24V Power supply 220-240VAC
	Logica 42 Surface Mounted	2390	2373

Product / Accessories		
	T Joint Connectors	Extension signal cable
	Available in colour 10	
	IP67	IP67 L : 1000mm / 2000mm
Logica 42 Surface Mounted	2E60	2E61

Wiring Diagram

For Art. 3613

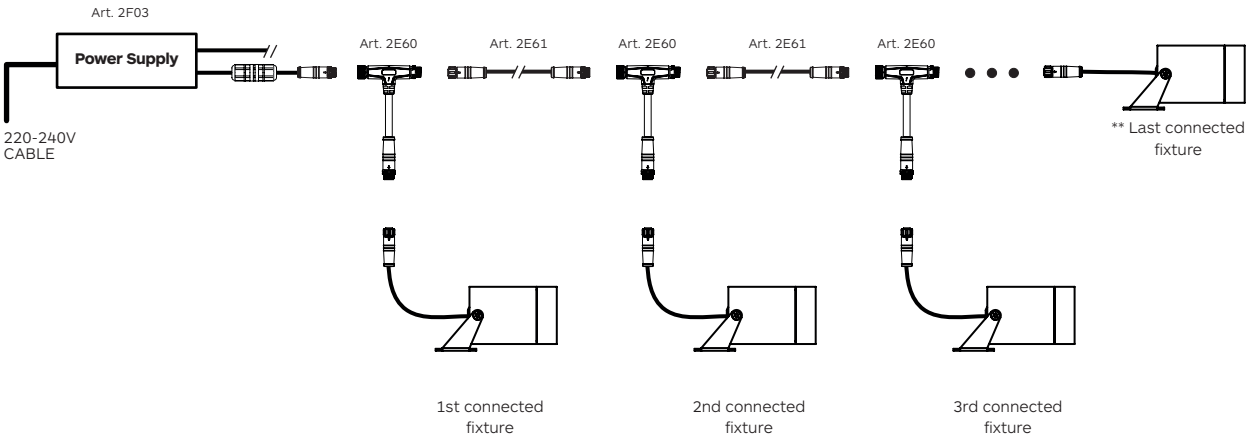

** Maximum 20 connected fixtures on the 1 driver.

GirasoLED

Surface mounted grazing light

Surface mounted light with body in cast aluminum, toughened thermal shock clear glass diffusers, weatherproof durable silicone gasket and external screws made of stainless steel.

Simple to install via cable entry with grommet. Can be connected directly to the main power. Available in two versions - Round and Square.

For complete code ordering information, please see pages 214-215.

LED Sources:

CRI: 80 | CCT: 3000K, 4000K.

- 10 - Black
- 65 - Embossed matt black
- 29 - Grey (Outdoor)

GirasoLED

AC220-240V

IP65

850°


CE

10


65

29

GirasoLED Round



GirasoLED Round



























		Product Code	Light Source Codes	LED Power	Nominal Lumen	Beam Angle	Dimming Options	CCT Options
<div>CRI>803000K</div> <div>High Rendering</div>	GirasoLED Round	3419	BN11	4 x 1W	240 lm	10°	D0 No Dim	30 3000K
	GirasoLED Square	3418						40 4000K

Symbols & Icons

Code system

Global presence

Symbols & Icons

Trim Round	
Trim Square	
Trimless Round	
Trimless Square	
Round ceiling cut	
Square ceiling cut	
CE Mark - Product complies with CE Standard.	
Other third party product approvals Our products include electrical and electronic components that carry other worldwide Test House approvals such as those shown:	
CSA Mark - Product complies with USA & Canada Standard.	
CB Mark - Product complies with CB Standard.	
KC Mark - Product complies with Korean Standard.	
UL Mark - Product complies with USA & Canada Standard.	
CLASS I Luminaires of insulation Class I - with earth connector.	
CLASS II Luminaires of insulation Class II - With safety isolation, this means the tension conductions elements are protected by additional isolation. The isolation of an earth wire it is not necessary and the connection to it is not allowed.	
CLASS III Luminaires of isolation Class III - designed for operation of protected low voltage supply (>42V).	
Passes the 850° glow wire test in accordance with IEC 695-2-1.	
Passes the 960° glow wire test in accordance with IEC 695-2-1.	
Dim2Warm	
Tuneable White	
Zoom	
Recyclable	
220-240V Alternating Current	
24V Direct Current	
Circular Economy	

IP__ Degree of Ingress Protection IP__


1st Number	Protection Against Dust and Solid Objects	2nd Number	Protection Against Moisture and Liquids
0	No-Protection	0	No-Protection
1	Protection against solid objects >50 mm	1	Protection against dripping water
2	Protection against solid objects >12 mm	2	Protection against dripping water tilted > 15 deg
3	Protection against solid objects >2.5 mm	3	Protection against spraying water > 30 deg
4	Protection against solid objects >1 mm	4	Protection against spraying water
5	Dust - protected	5	Protection against water jet
6	Dust - tight	6	Protection against waves
		7	Protection against the effects of immersion
		8	Protection against submersion

Level of Shock Resistance

IK00	Not protected	<div>IK00</div>
IK01	Protected against 0.15 J shocks	<div>IK01</div>
IK02	Protected against 0.2 J shocks	<div>IK02</div>
IK03	Protected against 0.35 J shocks	<div>IK03</div>
IK04	Protected against 0.5 J shocks	<div>IK04</div>
IK05	Protected against 0.7 J shocks	<div>IK05</div>
IK06	Protected against 1 J shocks	<div>IK06</div>
IK07	Protected against 2 J shocks	<div>IK07</div>
IK08	Protected against 5 J shocks	<div>IK08</div>
IK09	Protected against 10 J shocks	<div>IK09</div>
IK10	Protected against 20 J shocks	<div>IK10</div>


Code System

Code ordering example: **6 3 3 1 B C 2 2 - 9 0 3 0 1 6 D 0 1 0**

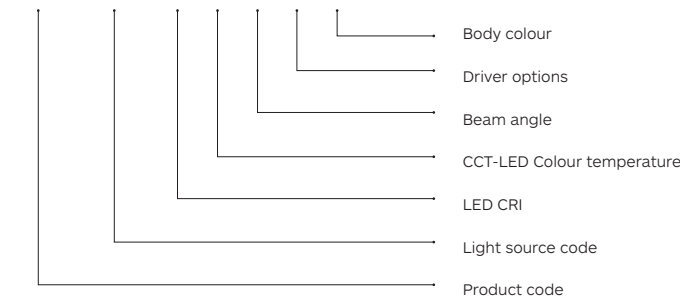


LED CRI		CCT-LED Colour temperature		Driver Options		Body Colour	
80	CRI > 80	27	Warm White 2700K	00	No Driver	01	White / Black (W&B)
90	CRI > 90	30	Warm White 3000K	D0	No dimming	10	Black
95	CRI > 95	40	Neutral White 4000K	DL	Laser Dim	11	White
97	CRI > 97	50	Cool White 5000K	DA	Dali Dim	17	Black / White (B&W)
		57	Cool White 5700K	DP	Phase	26	White / Gold (W&G)
		C1	Multi CCT Options 2700K, 4000K, 6000K	DX	DMX	27	Chrome Polished
		C2	Multi CCT Options 3000K, 4000K, 5700K	DC	CASAMBI	28	Brass Polished
		DW	Dim2Warm™ 3000K - 1800K	D1	0-10V Dim	29	Grey (for Outdoor use)
		TW	Tuneable White 1800K - 6000K	DN	On-board Dimmer	33	Silver
						34	Nickel
						35	Gold
						54	Sanded White (for outdoor use)
						55	Red
						74	Nickel Polished
						75	Grey (RAL 9006)
						79	Natural Aluminium
						84	Stainless Steel
						92	Black / Grey (B&G)

How to order for Standard Products

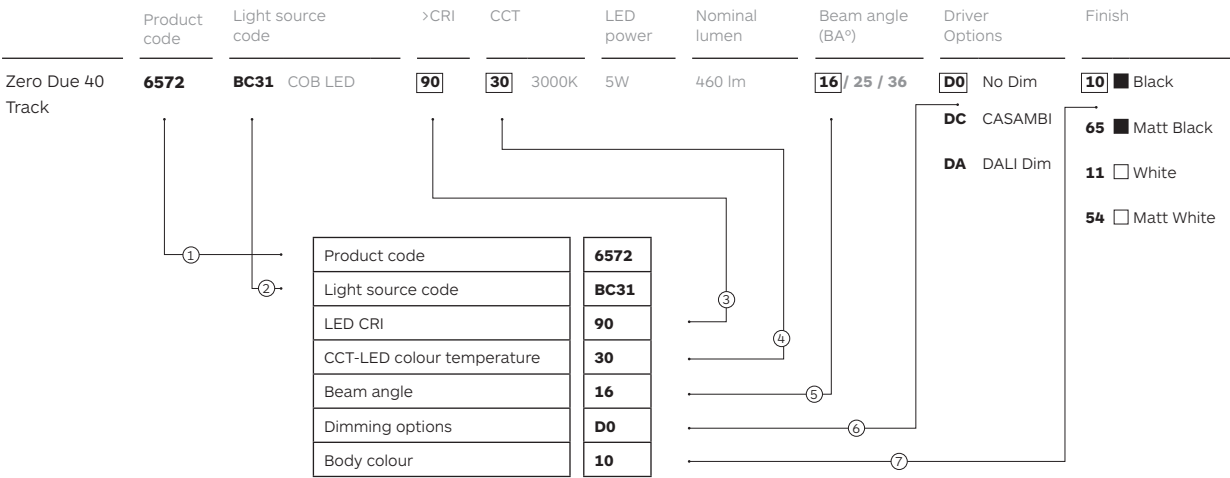

How to order for Pixo Catenary

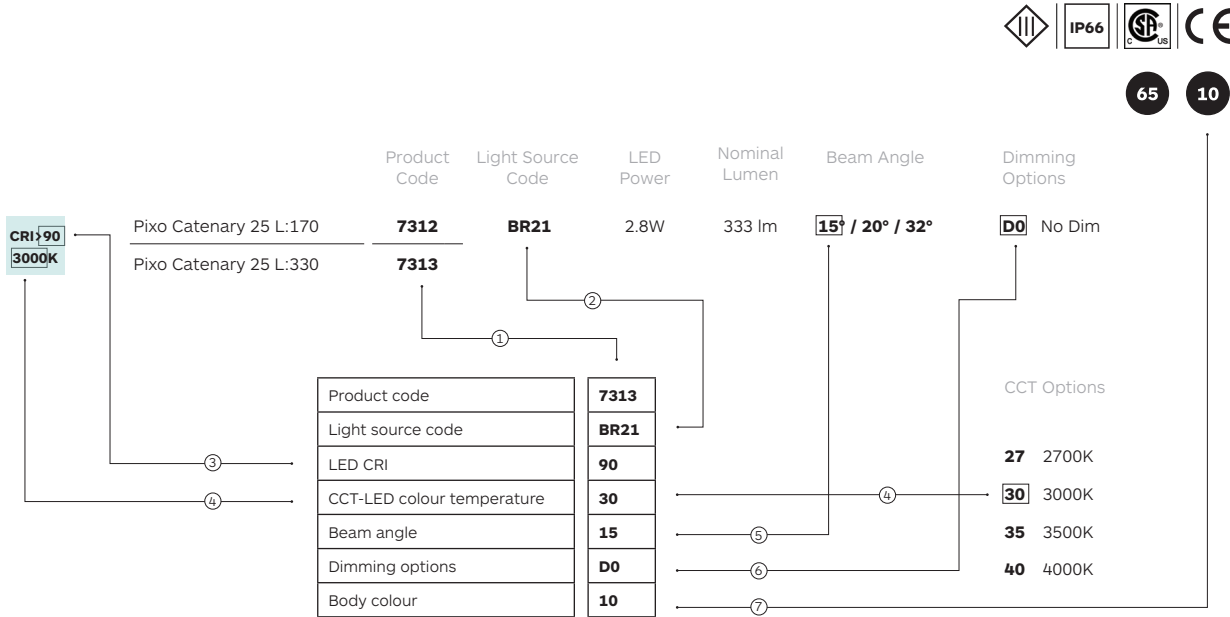

All dimensions in the catalogue in mm.

Global presence

Celebrating over 50 years of vision, dedication and innovation, formalighting's versatile and high-quality product offerings extends internationally via our headquarters in Hong Kong, London, Milan and Shanghai. Our well chosen and selected partners as well as our affiliated international offices broaden our global presence further in markets such as USA, Australia, Japan, South East Asia, India and the Middle East.

Through our commitment to growth and investment within formalighting's professional team, infrastructure and product ranges, we are able to provide increasing service to our global retail and hospitality clients as well as lighting designers and specifiers strengthening our position as a leading international supplier of innovative architectural lighting solutions and systems.

With over 50 years' experience in designing and manufacturing architectural lighting, formalighting's comprehensive portfolio offers a competitive range of European designed and expertly engineered products that carry CB, CE, CCC and UL certifications.

Furthermore formalighting's latest award-winning motorized range of track, pendant, and recessed fixtures, featuring remote-controlled adjustable pan and tilt, dim, dim to warm, tuneable white and beam shaping lens, are available worldwide incorporating the latest, most advanced lighting technologies.

MILAN

EUROPE HEADQUARTERS

Tel (+39) 02 9354 0300

Fax (+39) 02 9343 5117

E- mail info-europe@formalighting.com

HONG KONG

ASIA HEADQUARTERS

Tel (+ 852) 2516 6500

Fax (+ 852) 2516 6525

E- mail info-asia@formalighting.com

NEW YORK

LOCAL SALES OFFICE

Tel (+1) 470 419 4003

E- mail info-us@formalighting.com

SHANGHAI

LOCAL SALES OFFICE

E- mail info-china@formalighting.com

LONDON

LOCAL SALES OFFICE

E- mail info-uk@formalighting.com

AUSTRALIA

LOCAL SALES OFFICE

Tel (+61) 488 567 388

E- mail info-australia@formalighting.com

INDIA

LOCAL SALES OFFICE

Tel (+91) 9686351257

E- mail info-india@formalighting.com

formalighting is constantly developing and improving its products therefore all information, drawings illustrations, specifications, photometric values in this catalogue are indicative and shall not form part of any commitment by our company that reserves the right to change specifications without prior notification or public announcement. Technical information on the installation-instruction has precedence over the information in the catalogue. Our general terms and conditions shall apply notwithstanding any stipulation on the contrary to all the orders and agreement with formalighting. You can obtain a copy of these conditions on demand.

Publication date: May 2024
©Copyright formalighting

With thanks to all contributors for the realization of this catalogue

Designed by formalighting's Graphic Design Department

No part of this catalogue may be copied without written authorization of formalighting

Working Catalogue 2024

formalighting

HONG KONG

-

LONDON

-

MILAN

-

SHANGHAI

-

NEW YORK

-

INDIA

www.formalighting.com