



formalighting

EVO

48V Track System

2025

EVO 48V Track System

Page 16

Vivo

Page 22

TicTok

Page 30

Zero

Page 40

Polaris

Page 46

Filo

Page 52

Pixo Retro



Page 54

Pixo

Page 56

Lucciole

Vivo

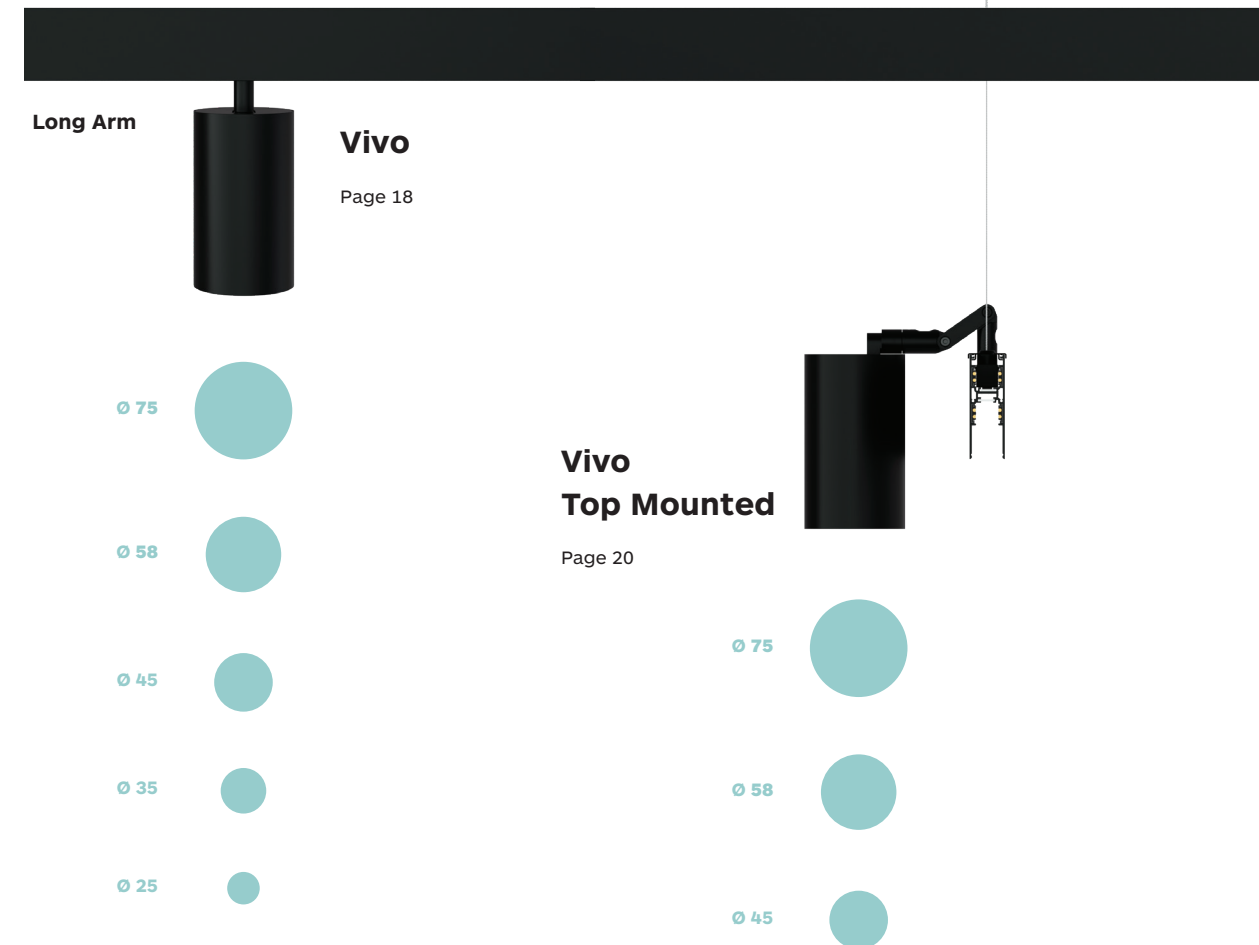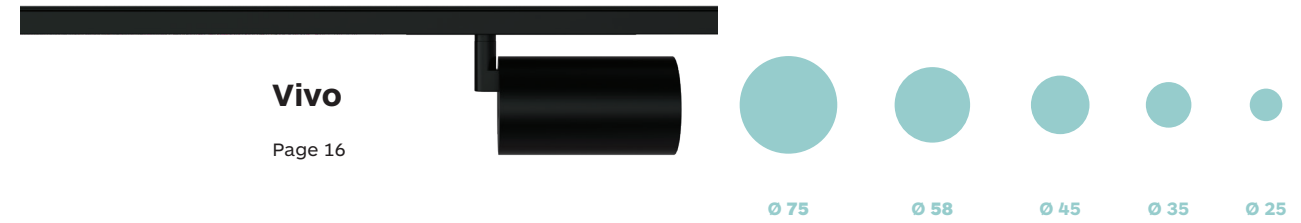

TicTok




TicTok
Page 22

- Ø 75
- Ø 58
- Ø 45
- Ø 35
- Ø 25



TicTok Zoom
Page 26



- Ø 58
- Ø 45

TicTok Top Mounted
Page 28




- Ø 75
- Ø 58
- Ø 45

Long Arm



TicTok Zoom
Page 26

- Ø 58
- Ø 45



Zero Framing Projector



Zero 28 Framing Projector
Page 30

- Ø 28



Zero 38 Framing Projector
Page 32

- Ø 38

Long Arm



TicTok
Page 24

- Ø 75
- Ø 58
- Ø 45
- Ø 35
- Ø 25

Long Arm



Zero 38 Framing Projector
Page 30

- Ø 38

Zero

**Zero
Compasso
Wallwasher**

Page 32



Zero 33

Page 36



Ø 33



Ø 42



Ø 66



Ø 100

Long Arm

Zero

Page 38



Ø 100



Ø 66



Ø 42



Polaris

Long Arm

**Zero
Compasso
Wallwasher**

Page 32



Zero 33

Page 36



Ø 33



Ø 42



Ø 66



Ø 100

Zero

Page 38



Ø 100



Ø 66



Ø 42




Polaris 20

Page 40



Polaris 20

Page 40



Polaris 20 Wallwasher

Page 40




Polaris 20 Adjustable

Page 44



Polaris 20 Opal Diffuser

Page 42





Filo

Page 46

Pixo

Page 54

Pixo Retro

Page 52



Ø 38



Ø 25



Ø 38



Ø 25




Lucciole

Page 56



EVO 48V Track Options

Pages 64-69

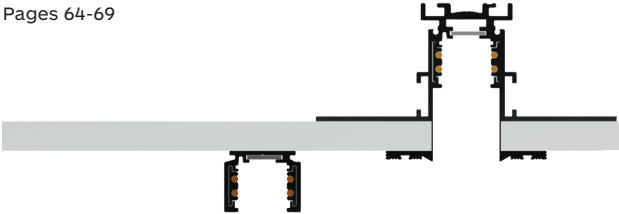


Power Supply

Page 72



Mounting Accessories


Page 66

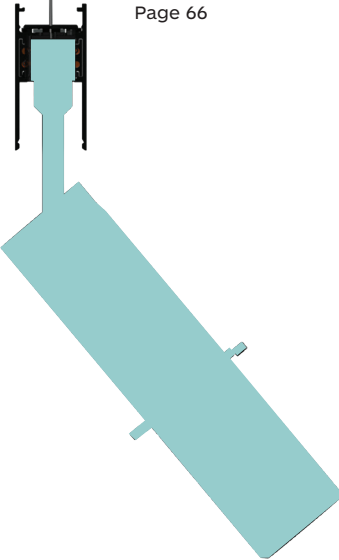

Code Ordering System

Page 77

EVO 48V Track, High Performance Luminaires

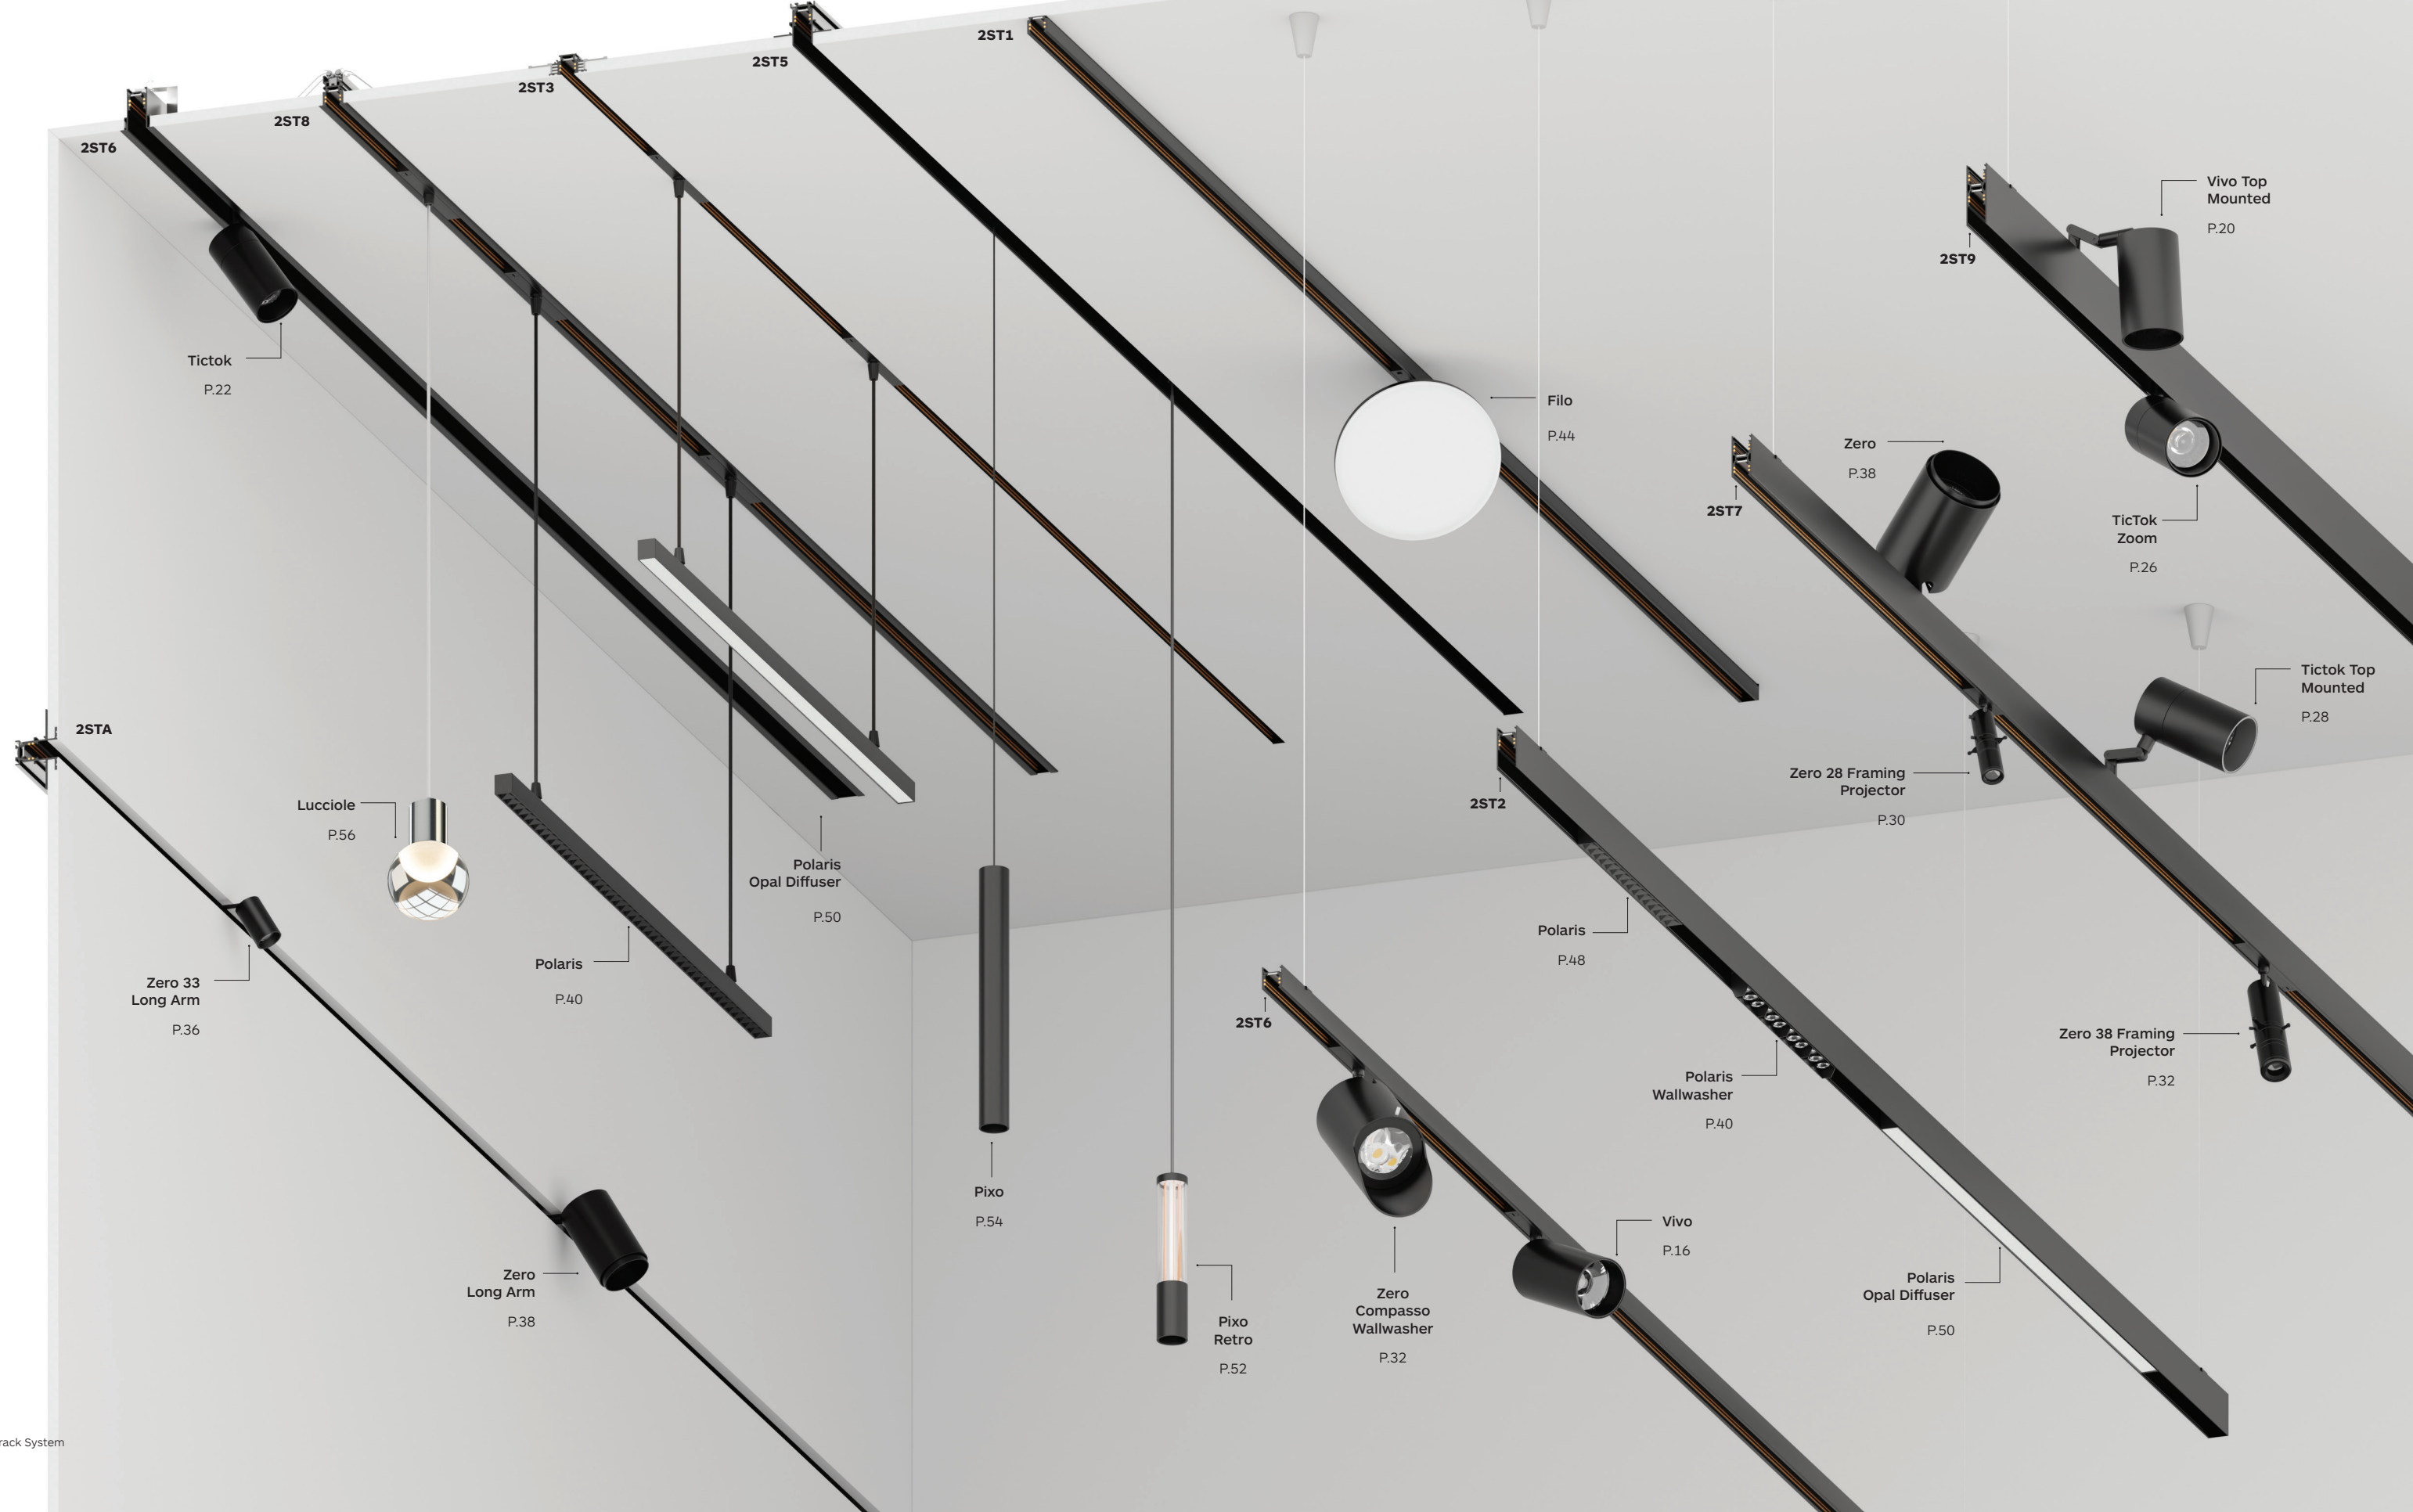

formalighting

EVO 48V

Track System


formalighting

Vivo

Designed by Ponctuelle Studio

25 | 35 | 45 | 58 | 75
EVO 48V Track

- 10 - Black
- 65 - Embossed matt black
- 11 - White
- 54 - Embossed matt white



Regular Arm + Regular Track

Vivo enables users to create unique lighting schemes and configurations.

Energy-saving, track mounted on a EVO 48V track system, with integrated driver in the track adaptor - the focus is on eco-friendly design and modularity.

Tool-free interchangeable LED modules facilitate design flexibility and ease of on-site maintenance. Available in five different adjustable light head sizes Ø25, Ø35, Ø45, Ø58 and Ø75mm, with versatile aiming angle tiltable 0°-90° and rotatable 360°.

Available in embossed matt black/white finishing; make it the perfect solution for retail, hospitality, and high-end residences.

Vivo is available with Casambi and DALI control options. DALI dimmable fixtures can also be controlled by Casambi DALI Broadcast device, please see pages 64-65 for details.

For complete code ordering information, please see page 79.



LED Sources:



High Efficacy:
CRI: 90 & 93 | CCT: 2700K, 3000K, 3500K, 4000K.

High Rendering:
CRI: 95 & 98 | CCT: 2700K, 3000K, 3500K, 4000K.

Accessories:

- Wide & Dense Texture Honeycomb Louvre
 - Elliptical Beam Diffuser
 - Coloured Glasses Diffuser
 - Opal Lens
 - Spread Lens
 - Cross blade Louvre
 - Barn doors
 - Wallwasher Cone 45°
- Please see page 60 for details.

Vivo

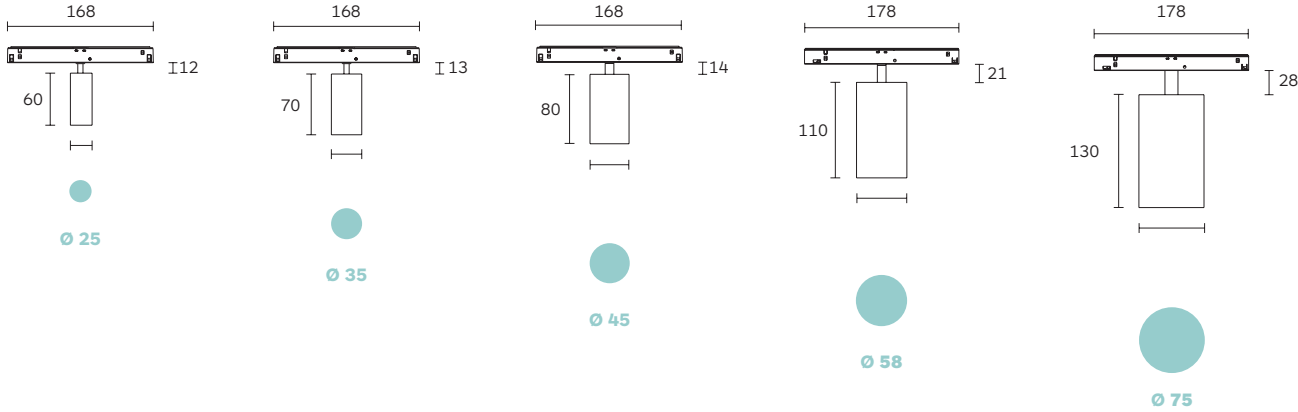

		Product Code	LED Module Code	LED Power	Nominal Lumen	Beam Angle
CRI>90 3000K High Efficacy	Vivo 25	96A8	E017	3.4W	370 lm	15° / 20° / 32°
	Vivo 35	96A9	E063	2.1W	195 lm	05°
CRI>93 3000K High Efficacy	Vivo 35	96A9	E013	5W	691 lm	20° / 24° / 38°
	Vivo 45	96B0	E025	9W	1208 lm	18° / 28° / 36°
	Vivo 58	96B1	E031	15W	1740 lm	14° / 24° / 36°
			E026	14W	1932 lm	18° / 25° / 37°
	Vivo 75	96C7	E029	18W	2305 lm	12° / 26° / 36°
CRI>95 3000K High Rendering	Vivo 45	96B0	E051	8W	738 lm	08°
CRI>98 3000K High Rendering	Vivo 45	96B0	E020	9W	901 lm	18° / 26° / 36°
	Vivo 58	96B1	E027	14W	1458 lm	18° / 25° / 37°
	Vivo 75	96C7	E006	18W	1765 lm	14° / 26° / 37°

Dimming Options

- D0 No Dim
- DA Dali Dim
- DC CASAMBI

CCT Options


- 27 2700K
- 30 3000K
- 35 3500K
- 40 4000K

Vivo Long Arm

Designed by Ponctuelle Studio

25 | 35 | 45 | 58 | 75
EVO 48V Track

- 10 - Black
- 65 - Embossed matt black
- 11 - White
- 54 - Embossed matt white

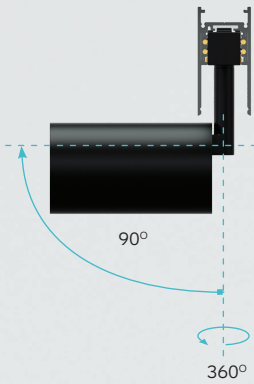

Long Arm + Deep Track

Vivo Long Arm is designed for deep recessed and pendant EVO 48V track applications. Energy-saving, track mounted on a EVO 48V track system, with integrated driver in the track adaptor - the focus is on eco-friendly design and modularity.

Tool-free interchangeable LED modules facilitate design flexibility and ease of on-site maintenance. Available in five different adjustable light head sizes Ø25, Ø35, Ø45, Ø58 and Ø75mm, with versatile aiming angle tiltable 0°-90° and rotatable 360°.

Available in embossed matt black/white finishing; make it the perfect solution for retail, hospitality, and high-end residences.

Vivo Long Arm is available with Casambi and DALI control options. DALI dimmable fixtures can also be controlled by Casambi DALI Broadcast device, please see pages 64-65 for details.

For complete code ordering information, please see page 79.



LED Sources:



High Efficacy:
CRI: 90 & 93 | CCT: 2700K, 3000K, 3500K, 4000K.

High Rendering:
CRI: 95 & 98 | CCT: 2700K, 3000K, 3500K, 4000K.

Accessories:

- Wide & Dense Texture Honeycomb Louvre
 - Elliptical Beam Diffuser
 - Coloured Glasses Filters
 - Opal Lens
 - Spread Lens
 - Cross blade Louvre
 - Barn doors
 - Wallwasher Cone 45°
- Please see page 60 for details.

Vivo Long Arm

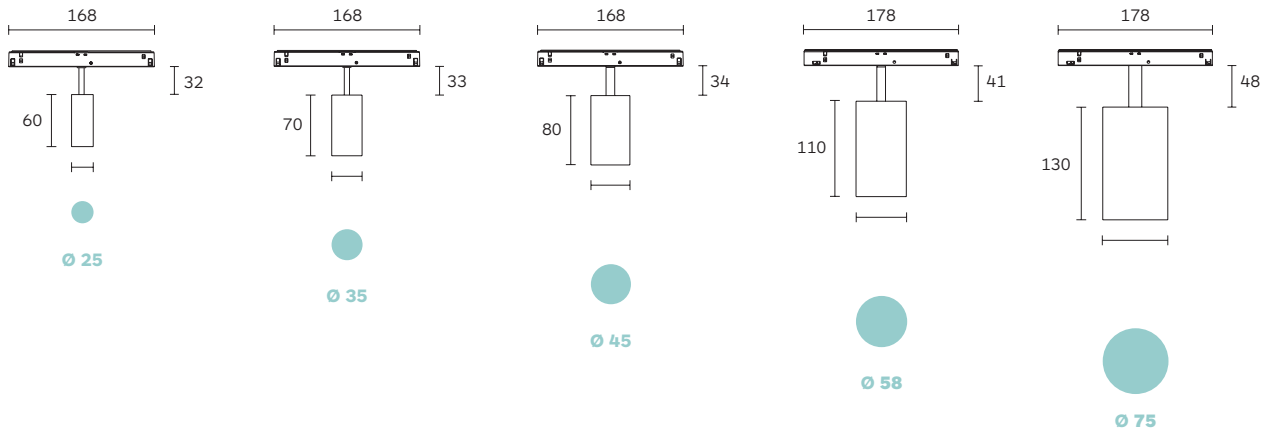

		Product Code	LED Module Code	LED Power	Nominal Lumen	Beam Angle
CRI>90 3000K High Efficacy	Vivo 25	96C8	E017	3.4W	370 lm	15° / 20° / 32°
	Vivo 35	96C9	E063	2.1W	195 lm	05°
CRI>93 3000K High Efficacy	Vivo 35	96C9	E013	5W	691 lm	20° / 24° / 38°
	Vivo 45	96D0	E025	9W	1208 lm	18° / 28° / 36°
	Vivo 58	96D1	E031	15W	1740 lm	14° / 24° / 36°
			E026	14W	1932 lm	18° / 25° / 37°
	Vivo 75	96D2	E029	18W	2305 lm	12° / 26° / 36°
CRI>95 3000K High Rendering	Vivo 45	96D0	E051	8W	738 lm	08°
CRI>98 3000K High Rendering	Vivo 45	96D0	E020	9W	901 lm	18° / 26° / 36°
	Vivo 58	96D1	E027	14W	1458 lm	18° / 25° / 37°
	Vivo 75	96D2	E006	18W	1765 lm	14° / 26° / 37°

Dimming Options

- D0 No Dim
- DA Dali Dim
- DC CASAMBI

CCT Options

- 27 2700K
- 30 3000K
- 35 3500K
- 40 4000K

Vivo Top Mounted

45 | 58 | 75
EVO 48V Track

Vivo Top Mount is designed for H-shaped pendant profiles and is available in 48V EVO track applications.

Vivo Series focuses on eco-friendly design and modularity. TicTok's tool-free, and interchangeable LED module facilitate design flexibility and ease of on-site maintenance. The tool-free interchangeable LED module is available in Ø45, Ø58 and Ø75mm head sizes, the extended arm of the top mount design provides extra vertical tilt and rotation angles: an eco-friendly onsite maintainable solution.

- 10 - Black
- 65 - Embossed matt black
- 11 - White
- 54 - Embossed matt white



LED Sources:


High Efficacy:
CRI: 93 | CCT: 2700K, 3000K, 3500K, 4000K

High Rendering:
CRI: 98 | CCT: 2700K, 3000K, 3500K, 4000K


Accessories:

- Wide & Dense Texture Honeycomb Louvre
 - Elliptical Beam Diffuser
 - Coloured Glasses Diffuser
 - Opal Lens
 - Spread Lens
 - Cross blade Louvre
 - Barn doors
 - Wallwasher Cone 45°
- Please see page 60 for details.

Vivo Top Mounted



Angle Adjustment:

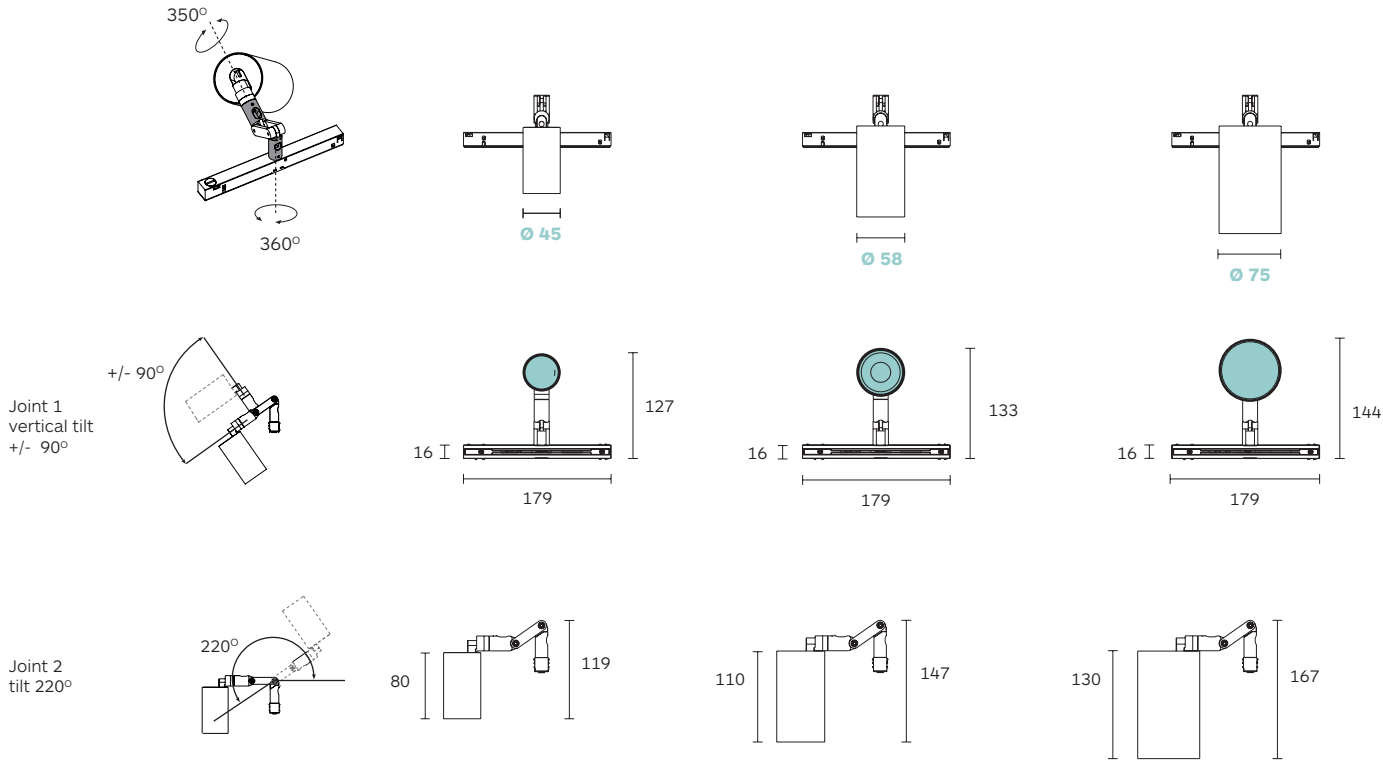

		Product Code	LED Module Code	LED Power	Nominal Lumen	Beam Angle	Dimming Options	CCT Options
CRI>93 3000K High Efficacy	Vivo 45	96J1	E025	9W	1208 lm	18° / 28° / 36°	D0 No Dim	27 2700K
	Vivo 58	96J2	E031	15W	1740 lm	14° / 24° / 36°	DC CASAMBI	30 3000K
			E026	14W	1932 lm	18° / 25° / 37°	DA Dali Dim	35 3500K
	Vivo 75	96J3	E029	18W	2305 lm	13° / 26° / 36°	D1 0-10V Dim	40 4000K
CRI>98 3000K High Rendering	Vivo 45	96J1	E020	9W	901 lm	18° / 28° / 36°		
	Vivo 58	96J2	E027	15W	1458 lm	18° / 25° / 37°		
	Vivo 75	96J3	E006	18W	1765 lm	14° / 26° / 37°		

TicTok

25 | 35 | 45 | 58 | 75
EVO 48V Track



- 10 - Black
- 65 - Embossed matt black
- 11 - White
- 54 - Embossed matt white

TicTok enables users to create unique lighting schemes and configurations.

Energy-saving, track mounted on a EVO 48V track system, with integrated driver in the track adaptor - the focus is on eco-friendly design and modularity.

TicTok's tool-free interchangeable LED module facilitates design flexibility and ease of on-site maintenance. Available in five different adjustable light head sizes Ø25, Ø35, Ø45, Ø58 and Ø75mm, with versatile aiming angle tiltable 0°-70° and rotatable 360°.

Designed to be the perfect solution for accent lighting in sustainable lighting design schemes for retail, hospitality and high-end residences. A ready-to-use solution for greater flexibility, energy efficiency, and sustainability.

TicTok is available with Casambi or DALI control options. DALI dimmable fixtures can also be controlled by Casambi DALI Broadcast device, please see pages 64-65 for details.

For complete code ordering information, please see page 79.




LED Sources:

High Efficacy:
CRI: 90 & 93 | CCT: 2700K, 3000K, 3500K, 4000K.

High Rendering:
CRI: 95 & 98 | CCT: 2700K, 3000K, 3500K, 4000K.



Accessories:

- Wide & Dense Texture Honeycomb Louvre
 - Elliptical Beam Diffuser
 - Coloured Glasses Filters
 - Opal Lens
 - Spread Lens
 - Cross blade Louvre
 - Barn doors
 - Wallwasher Cone 45°
- Please see page 60 for details.



Regular Arm + Regular Track

TicTok

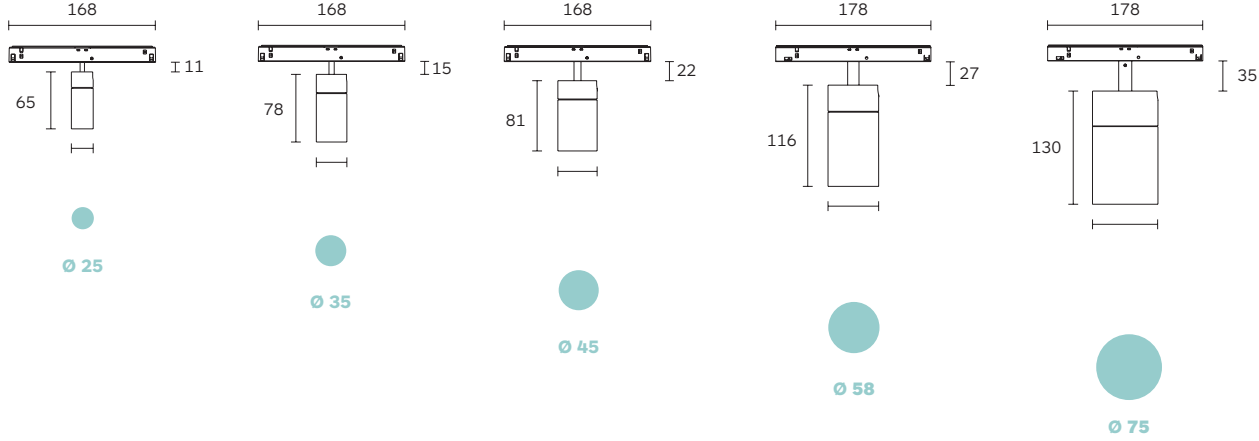

		Product Code	LED Module Code	LED Power	Nominal Lumen	Beam Angle
CRI>90 3000K High Efficacy	TicTok 25	96B2	E017	3.4W	370 lm	15° / 20° / 32°
	TicTok 35	96B3	E063	2.1W	195 lm	05°
CRI>93 3000K High Efficacy	TicTok 35	96B3	E013	5W	691 lm	20° / 24° / 38°
	TicTok 45	9662	E025	9W	1208 lm	18° / 28° / 36°
	TicTok 58	9664	E031	15W	1740 lm	14° / 24° / 36°
			E026	14W	1932 lm	18° / 25° / 37°
	TicTok 75	9666	E029	18W	2305 lm	12° / 26° / 36°
CRI>95 3000K High Rendering	TicTok 45	9662	E051	8W	738 lm	08°
CRI>98 3000K High Rendering	TicTok 45	9662	E020	9W	901 lm	18° / 28° / 36°
	TicTok 58	9664	E027	14W	1458 lm	18° / 25° / 37°
	TicTok 75	9666	E006	18W	1765 lm	14° / 26° / 37°

Dimming Options

- D0 No Dim
- DA Dali Dim
- DC CASAMBI

CCT Options

- 27 2700K
- 30 3000K
- 35 3500K
- 40 4000K

TicTok Long Arm

25 | 35 | 45 | 58 | 75
EVO 48V Track

- 10 - Black
- 65 - Embossed matt black
- 11 - White
- 54 - Embossed matt white

TicTok Long Arm is designed for deep recessed and pendant EVO 48V track applications.


TicTok focus on eco-friendly design and modularity.

TicTok's tool-free, and interchangeable LED module facilitates design flexibility and ease of on-site maintenance. Available in five different adjustable light head sizes Ø25, Ø35, Ø45, Ø58 and Ø75mm, with versatile aiming angle tiltable 0°-70° and rotatable 360°.

Perfect solution for accent lighting in sustainable lighting design schemes for retail, hospitality and high-end residences. A ready-to-use solution for greater flexibility, energy efficiency, and sustainability.

TicTok is available with Casambi or DALI control options. DALI dimmable fixtures can also be controlled by Casambi DALI Broadcast device, please see pages 64-65 for details.

For complete code ordering information, please see page 79.

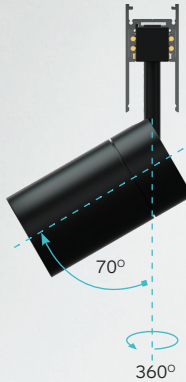

Long Arm + Deep Track





LED Sources:

- High Efficacy:
CRI: 90 & 93 | CCT: 2700K, 3000K, 3500K, 4000K.
- High Rendering:
CRI: 95 & 98 | CCT: 2700K, 3000K, 3500K, 4000K.

Accessories:

- Wide & Dense Texture Honeycomb Louvre
- Elliptical Beam Diffuser
- Coloured Glasses Filters
- Opal Lens
- Spread Lens
- Cross blade Louvre
- Barn doors
- Wallwasher Cone 45°
- Please see page 60 for details.

TicTok Long Arm

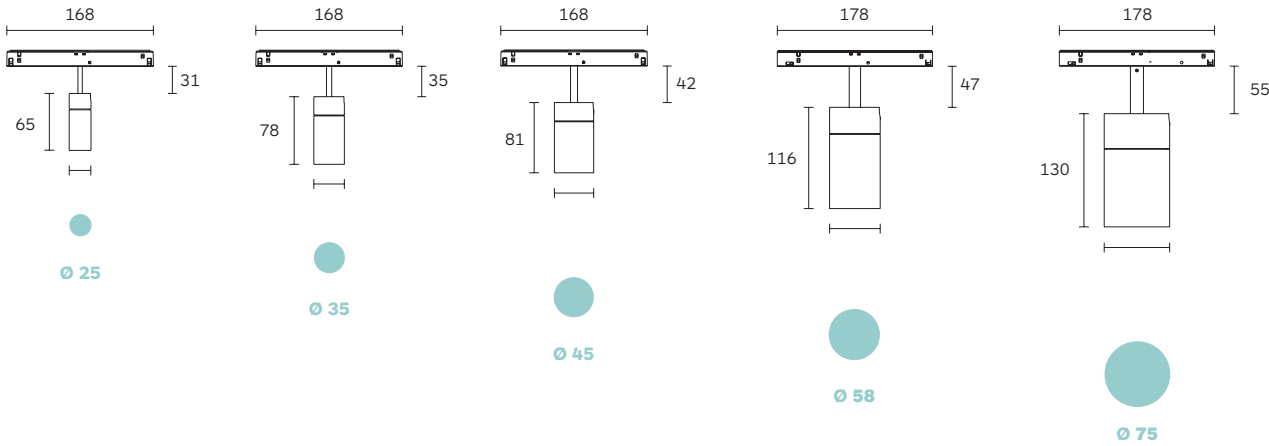

		Product Code	LED Module Code	LED Power	Nominal Lumen	Beam Angle
CRI>90 3000K High Efficacy	TicTok 25	96C3	E017	3.4W	370 lm	15° / 20° / 32°
	TicTok 35	96C4	E063	2.1W	195 lm	05°
CRI>93 3000K High Efficacy	TicTok 35	96C4	E013	5W	691 lm	20° / 24° / 38°
	TicTok 45	9663	E025	9W	1208 lm	18° / 28° / 36°
	TicTok 58	9665	E031	15W	1740 lm	14° / 24° / 36°
			E026	14W	1932 lm	18° / 25° / 37°
	TicTok 75	9667	E029	18W	2305 lm	12° / 26° / 36°
CRI>95 3000K High Rendering	TicTok 45	9663	E051	8W	738 lm	08°
CRI>98 3000K High Rendering	TicTok 45	9663	E020	9W	901 lm	18° / 28° / 36°
	TicTok 58	9665	E027	14W	1458 lm	18° / 25° / 37°
	TicTok 75	9667	E006	18W	1765 lm	14° / 26° / 37°

Dimming Options

- DO No Dim
- DA Dali Dim
- DC CASAMBI


CCT Options

- 27 2700K
- 30 3000K
- 35 3500K
- 40 4000K

TicTok Zoom

45 | 58
EVO 48V Track

- 10 - Black
- 65 - Embossed matt black
- 11 - White
- 54 - Embossed matt white

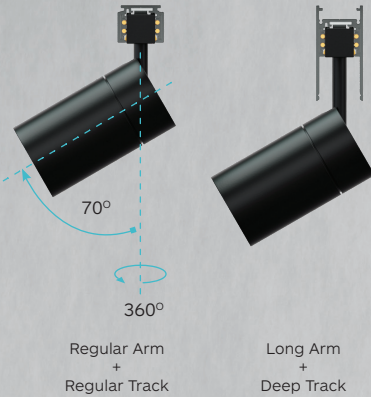

TicTok Zoom focus on eco-friendly design and modularity. TicTok Zoom tool-free interchangeable LED module facilitates design flexibility and ease of on-site maintenance.

Available in Ø45 and Ø58mm, with versatile aiming angle tiltable 0°-70° and rotatable 360°. The beam angle is manually adjustable through ring rotation, from 10° to 38°. It is available in standard surface, deep recessed, and pendant EVO 48V track applications.

A ready-to-use solution for greater flexibility, energy efficiency, and sustainability.

TicTok is available with Casambi or DALI control options. DALI dimmable fixtures can also be controlled by Casambi DALI Broadcast device, please see pages 64-65 for details.

For complete code ordering information, please see page 79.






LED Sources:

High Efficacy:
CRI: 90 | CCT: 2700K, 3000K, 3500K, 4000K.
CRI: 93 | CCT: 2700K, 3000K, 3500K, 4000K.

Accessories:

For more information about EVO 48V track accessories see pages 66-73.

TicTok Zoom

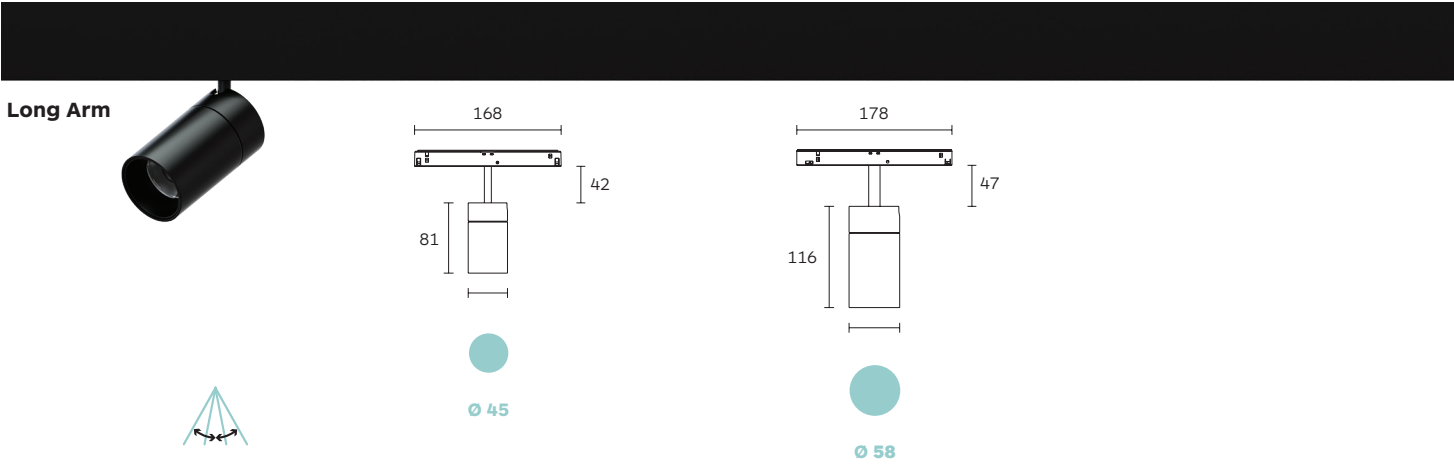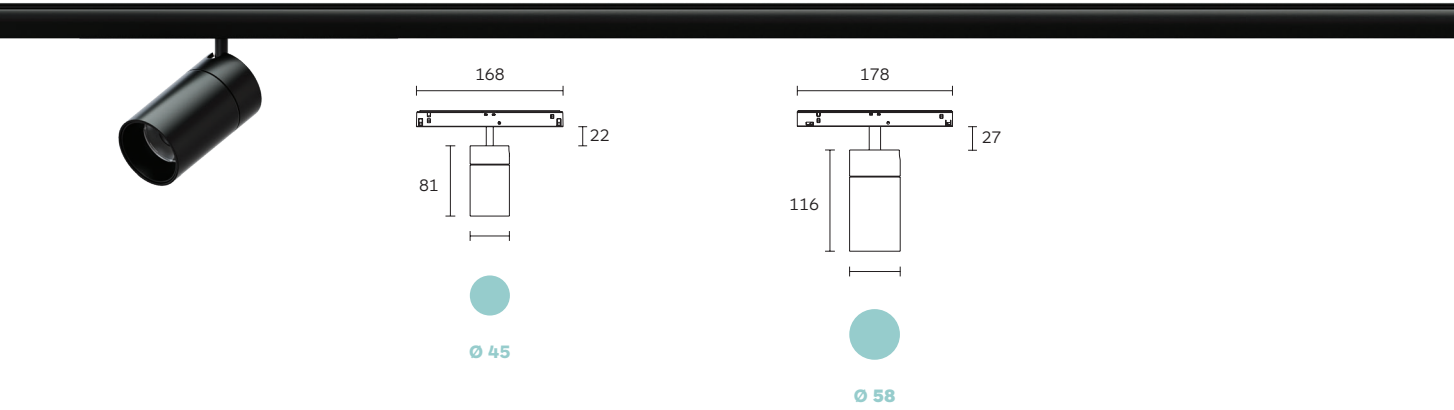

Zoom Spotlights



Zoom Spot 12° - 37°

		Product Code	LED Module Code	LED Power	Nominal Lumen	Beam Angle	Dimming Options	CCT Options
CRI>90 3000K High Efficacy	TicTok Zoom 45	96A6	E009	6W	549 lm	BS (12°-37°)	DO No Dim	27 2700K
	TicTok Zoom 45 Long Arm	96C5					DA Dali Dim	30 3000K
							DC CASAMBI	35 3500K
							DN On-board Dimmer	40 4000K
CRI>93 3000K High Efficacy	TicTok Zoom 58	96A7	E004	15W	1635 lm	BS (17°-27°)		
	TicTok Zoom 58 Long Arm	96C6						

TicTok Top Mounted

45 | 58 | 75
EVO 48V Track

TicTok Top Mount is designed for H-shaped pendant profiles and is available in 48V EVO track applications.

TicTok Series focuses on eco-friendly design and modularity. TicTok's tool-free, and interchangeable LED module facilitate design flexibility and ease of on-site maintenance. The tool-free interchangeable LED module is available in Ø45, Ø58 and Ø75mm head sizes, the extended arm of the top mount design provides extra vertical tilttable and rotation angles: an eco-friendly onsite maintainable solution.

LED Sources:

High Efficacy:
CRI: 93 | CCT: 2700K, 3000K, 3500K, 4000K


High Rendering:
CRI: 98 | CCT: 2700K, 3000K, 3500K, 4000K

Accessories:


- Wide & Dense Texture Honeycomb Louvre
 - Elliptical Beam Diffuser
 - Coloured Glasses Diffuser
 - Opal Lens
 - Spread Lens
 - Cross blade Louvre
 - Barn doors
 - Wallwasher Cone 45°
- Please see page 60 for details.

- 10 - Black
- 65 - Embossed matt black
- 11 - White
- 54 - Embossed matt white

TicTok Top Mounted



Angle Adjustment:

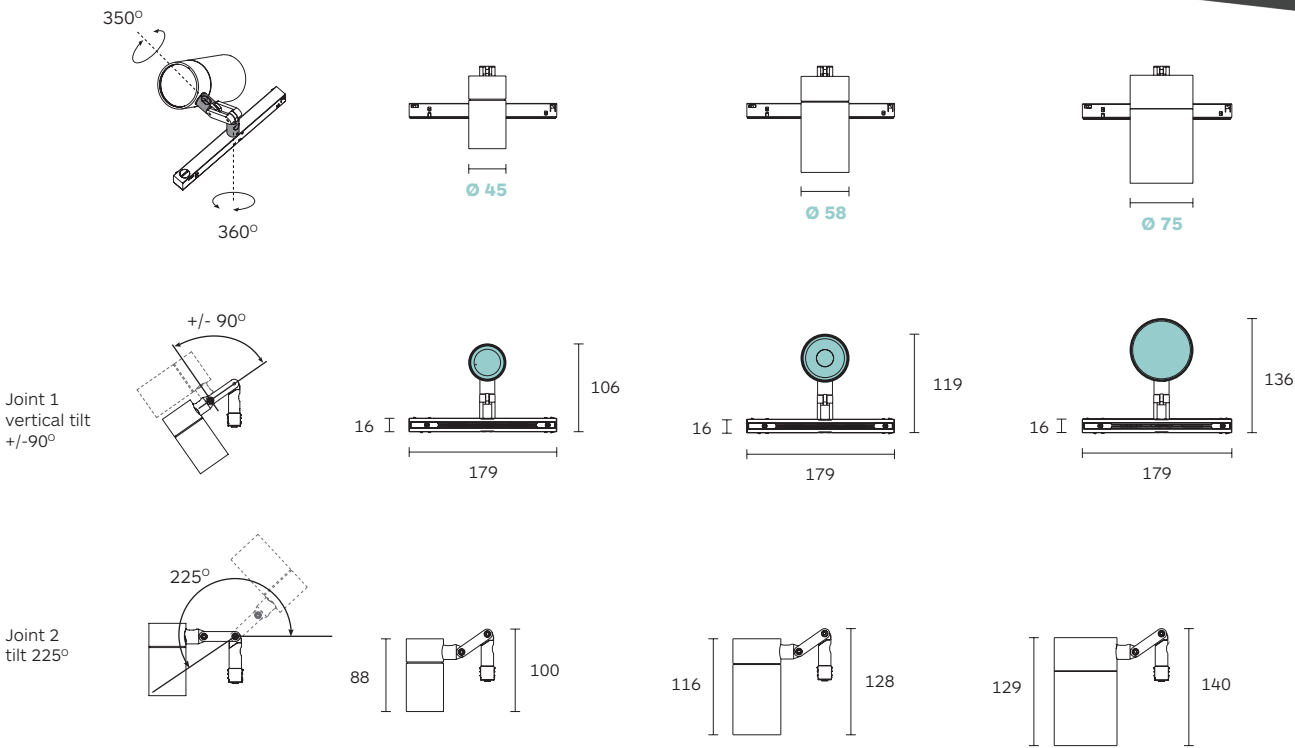

		Product Code	LED Module Code	LED Power	Nominal Lumen	Beam Angle	Dimming Options	CCT Options
CRI>93 3000K High Efficacy	TicTok 45	96H8	E025	9W	1208 lm	18° / 28° / 36°	D0 No Dim	27 2700K
	TicTok 58	96H9	E031	15W	1740 lm	14° / 24° / 36°	D1 0-10V Dim	30 3000K
			E026	14W	1932 lm	18° / 25° / 37°	DA Dali Dim	35 3500K
	TicTok 75	96J0	E029	18W	2305 lm	13° / 26° / 36°	DC CASAMBI	40 4000K
CRI>98 3000K High Rendering	TicTok 45	96H8	E020	9W	901 lm	18° / 28° / 36°		
	TicTok 58	96H9	E027	14W	1458 lm	18° / 25° / 37°		
	TicTok 75	96J0	E006	18W	1765 lm	14° / 26° / 37°		

Zero 28 Framing Projector

EVO 48V Track


- 10 - Black
- 11 - White

LED Sources:

High Rendering:
CRI: 97 | CCT: 2700K, 3000K, 3500K, 4000K

Accessories:

- Gobo Film, see page 61 for details.
Contact us for custom-made logo projection lens.



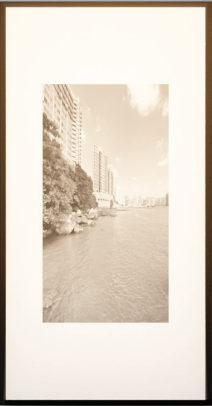


Zero 28 framing projector is an advanced, multi-functional EVO 48V track-mounted projector, tiltable vertically 0°-90° and rotatable horizontally 360°. With built-in bidirectional zooming lens with sharpness adjustability, and lens rotation. Available in regular and long arm version for deep recessed and pendant EVO 48V track.

Fully adjustable shutters to reframe the beam to the desired size and shape (circle, square/rectangle, or irregular four-sided shapes). Compatible with Gobo insertion for logo.
High-precision optics for sharp outlines and a high degree of lighting uniformity.

For complete code ordering information, please see page 79.

Zero 28 Framing Projector

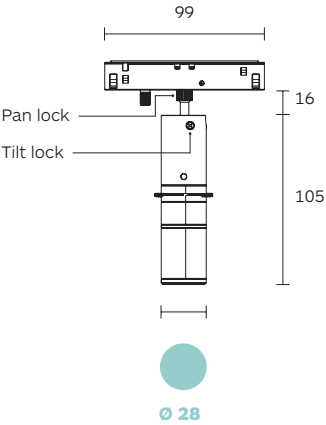

CRI>97
3000K

High
Rendering

Zero 28 Framing Projector

Product Code	LED Source Code	LED Power	Nominal Lumen	Beam Angle	Dimming Options	CCT Options
96H7	BC53	4.8W	470 lm	BS (11°- 32°)	D0 No Dim	27 2700K
					DC CASAMBI	30 3000K
					DA Dali Dim	35 3500K
					DN On Board Dimmer	40 4000K

Zero 38 Framing Projector

EVO 48V Track

- 10 - Black
- 65 - Embossed matt black
- 11 - White
- 54 - Embossed matt white

Zero 38 framing projector is an advanced, multi-functional EVO 48V track-mounted projector, tiltable vertically 0°-90° and rotatable horizontally 350°. With built-in bidirectional zooming lens with sharpness adjustability, and lens rotation. Available in regular and long arm version for deep recessed and pendant EVO 48V track.

Fully adjustable shutters to reframe the beam to the desired size and shape (circle, square/rectangle, or irregular four-sided shapes). Compatible with Gobo insertion for logo. High-precision optics for sharp outlines and a high degree of lighting uniformity.

Zero 38 framing projector is available with Casambi or DALI control options. DALI dimmable fixtures can also be controlled by Casambi DALI Broadcast device, please see pages 64-65 for details.

For complete code ordering information, please see page 79.

LED Sources:








High Rendering:
CRI: 97 | CCT: 2700K, 3000K, 3500K, 4000K.

Accessories:

- Gobo Film, see page 61 for details
- Contact us for custom-made logo projection lens.



Zero 38 Framing Projector





10

65

11


54

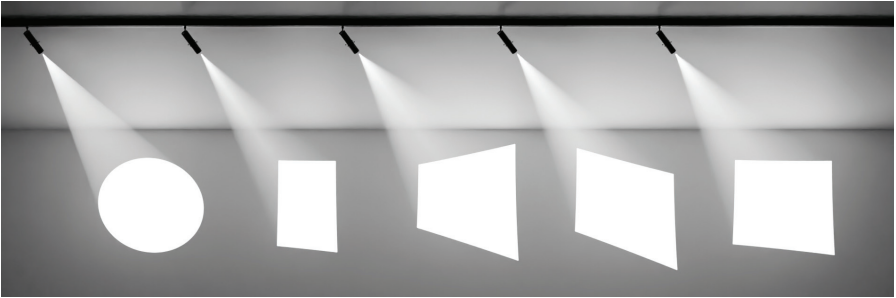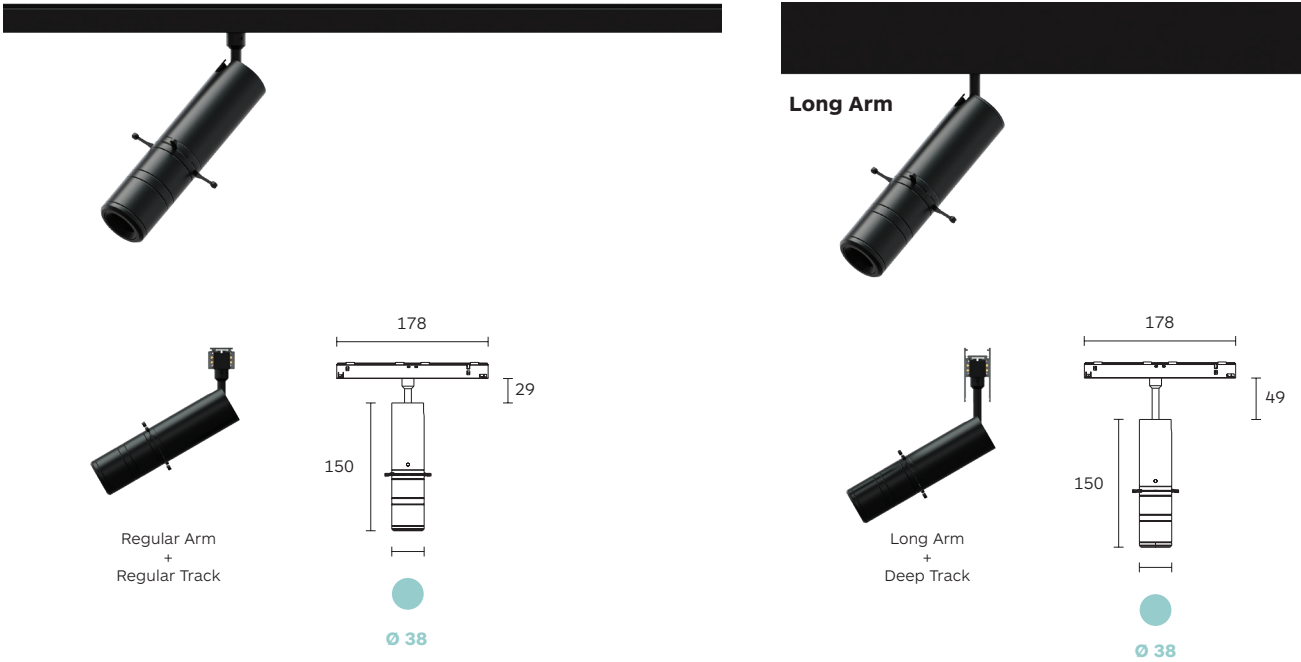

Recommended distance from fixture to wall between 0.5metres to 10metres.



Gobo Film logo projector lens.
Accessory Art. 2G24



	Product Code	LED Source Code	LED Power	Nominal Lumen	Beam Angle	Dimming Options	CCT Options
<div>CRI>97 3000K High Rendering</div>	Zero 38 Framing Projector	96A4	9.6W	922 lm	BS (14°-35°)	D0 No Dim	27 2700K
	Zero 38 Framing Projector Long Arm	96A5				DA Dali Dim	30 3000K
						DC CASAMBI	35 3500K
							40 4000K

Zero Compasso Wallwasher

42 | 66 | 100
EVO 48V Track

- 10 - Black
- 65 - Embossed matt black
- 11 - White
- 54 - Embossed matt white

EVO 48V track mounted Zero Compasso wallwasher, available in three sizes (Ø42, Ø66 and Ø100mm) versatile aiming angle tiltable vertically 0°-90° and rotatable horizontally 360°. Available in regular and long arm version for deep recessed and pendant EVO 48V track.

Perfect for museums and galleries applications. Wallwashing with high uniformity can be used to illuminate artwork and sculptures. Vertical uniformity creates a wide and distinguished spatial impression by brightening the entire height of the wall.

DALI dimmable fixtures can also be controlled by Casambi DALI Broadcast device, please see pages 64-65 for details.

For complete code ordering information, please see page 79.

LED Sources:








High Efficacy:
CRI: 90 | CCT: 2700K, 3000K, 3500K, 4000K.

High Rendering:
CRI: 97 | CCT: 2700K, 3000K, 3500K, 4000K.

Accessories:

For more information about EVO 48V track accessories see pages 66-73.

Zero Compasso Wallwasher





10

65

11

54

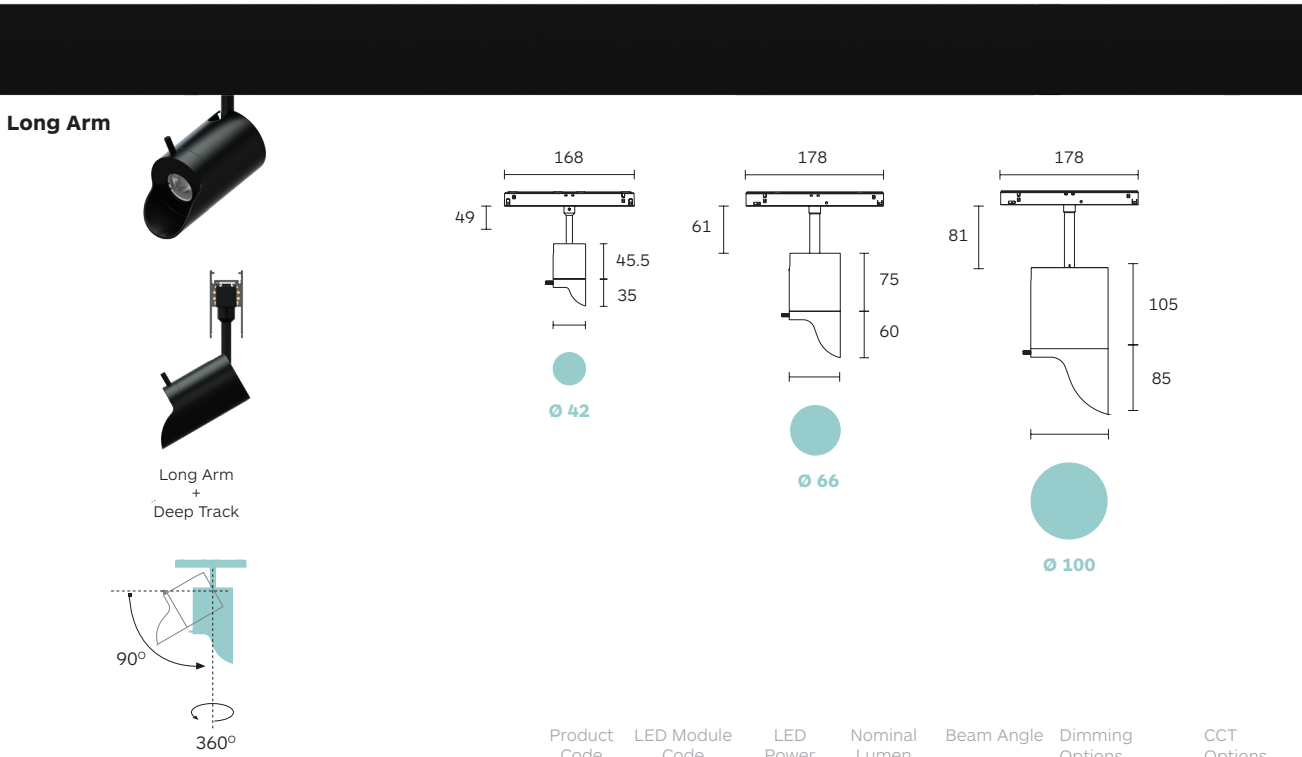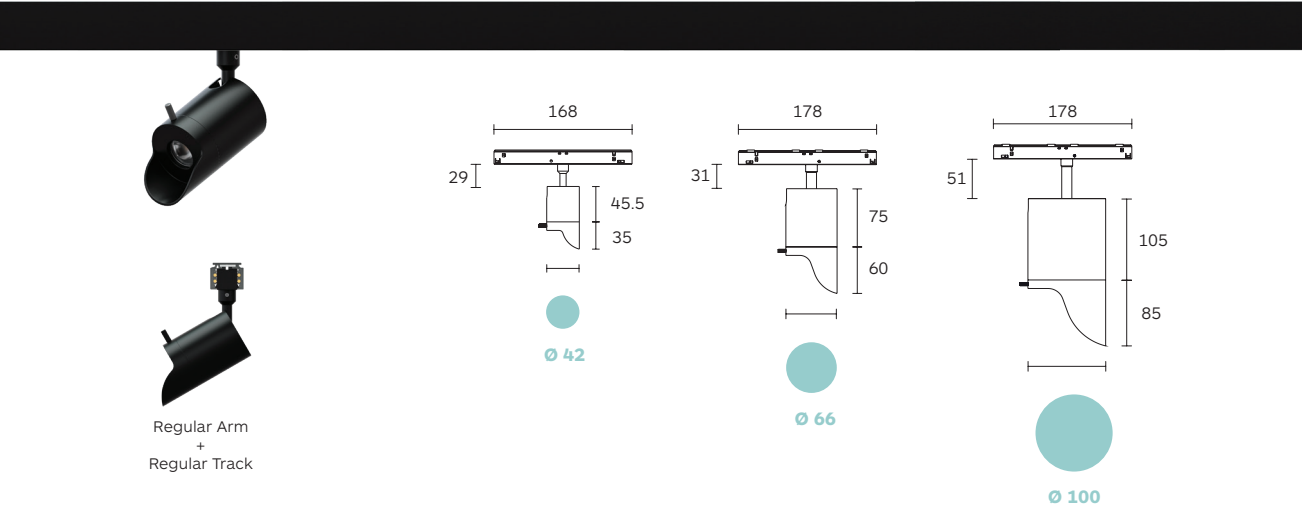

		Product Code	LED Module Code	LED Power	Nominal Lumen	Beam Angle	Dimming Options	CCT Options
CRI>90 3000K High Efficacy	Zero Compasso 42 Wallwasher	9673	BR21	4W	439 lm	WW	D0 No Dim	27 2700K
	Zero Compasso 42 Wallwasher Long Arm	96E5					DA Dali Dim	30 3000K
CRI>97 3000K High Rendering	Zero Compasso 66 Wallwasher	9671	BC22	12W	1550 lm		DC CASAMBI	35 3500K
	Zero Compasso 66 Wallwasher Long Arm	96E6						40 4000K
	Zero Compasso 100 Wallwasher	9672	BC33	14W	1789 lm			
	Zero Compasso 100 Wallwasher Long Arm	96E7						

WW = Wallwasher. Ordering code; **WW**.




Zero Compasso Wallwasher

Lighting Effects




Zero Compasso 66 Wallwasher

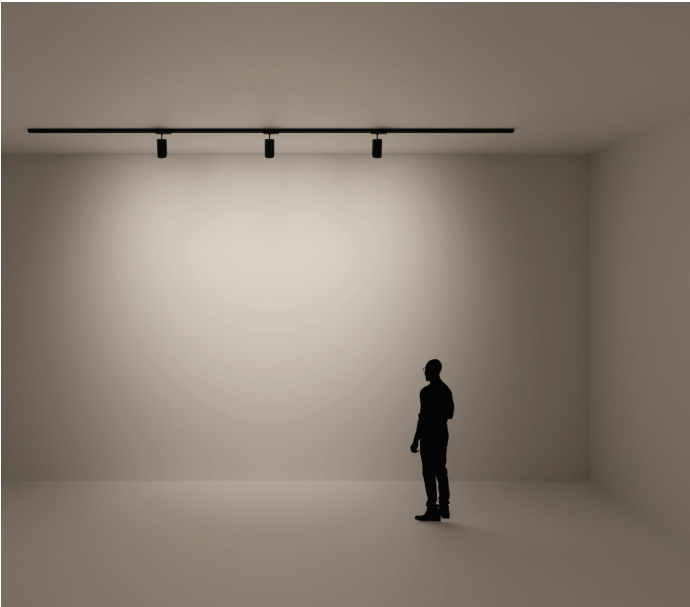

Zero Compasso 100 Wallwasher

Example of a wallwasher table

Illuminances 1x (Wall)								
	Zero Compasso 66 Wallwasher				Zero Compasso 100 Wallwasher			
Angle of tilt (α)	10°				0°			
Wall Height (m)	3				4			
Wall Width (m)	7				7			
Offset from Wall y	1.00	1.25	1.50	1.50	1.00	1.25	1.50	1.50
Luminaire spacing (m) x	0.83	1.00	1.25	1.50	1.00	1.25	1.50	1.50
Illuminance (lx) Average	141	117	105	78	126	105	93	70
Illuminance (lx) Max	242	201	180	134	223	186	165	124

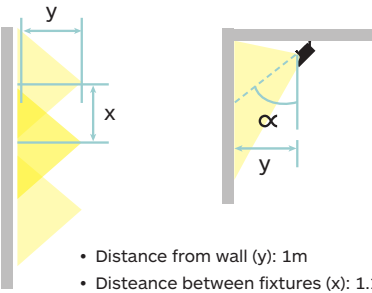

Luminaire spacing
The luminaire spacing (x) for some wallwashers can vary by up to 1.5 times the wall offset (y). Corresponding details are provided in the wallwasher table in catalog datasheets. Computerized beam calculations are recommended to check potential intersections with side walls.

Wallwasher angle of tilt
The lens wallwasher requires tilting. The product data sheet specifies the optimal tilt angle (α) for uniform light distribution on the wall.

Zero 33

EVO 48V Track

Zero 33 miniature design track spot projector with high lumen intensity values. Available in regular and long arm versions for deep recessed and pendant EVO 48V track.

Featuring an onboard beam angle adjustment (8-80°) to resolve the most complex focal points and dimming control (1-100%) to adjust the light's intensity while remaining invisible from short distances. Fully adjustable vertically tiltable 0°-90° and rotatable horizontally 330°.

Optical accessories are easy to install with a unique magnet system. DALI dimmable fixtures can also be controlled by Casambi DALI Broadcast device, please see pages 64-65 for details.

For complete code ordering information, please see page 79.

LED Sources:

High Efficacy:
CRI: 90 | CCT: 2700K, 3000K, 3500K, 4000K.

Accessories:

- Honeycomb Louvre
 - Diffuser
 - Barn doors
- Please see page 61 for details.

- 10 - Black
- 65 - Embossed matt black
- 11 - White
- 54 - Embossed matt white



EVO 48V Track System

Zero 33

10

65

11

54

Zoom Spotlights

Zoom Spot 8° - 80°

90°
330°

Dimmable control options

Zoom Spotlights 8° - 80°


		Product Code	LED Source Code	LED Power	Nominal Lumen	Beam Angle	Dimming Options	CCT Options
<div>CRI>90</div> <div>3000K</div> <div>High Efficacy</div>	Zero 33	9648	BR21	4.5W	448 lm	BS (8-80°)	DO No Dim	27 2700K
	Zero 33 Long Arm	9649					DA Dali Dim	30 3000K
							DC CASAMBI	35 3500K
							DN On-board Dimmer	40 4000K

Zero

40 | 66 | 100
EVO 48V Track



- 10 - Black
- 65 - Embossed matt black
- 11 - White
- 54 - Embossed matt white

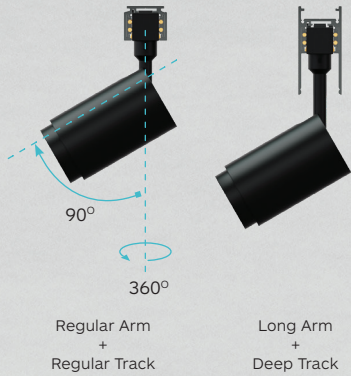

Zero compact aluminum housing designed for passive cooling. It is available in regular arm and long arm versions for deep recessed and pendant EVO 48V track.

Integrated dimmable driver in EVO 48V track adapter, available in Casambi or DALI control options. Available in three different sizes Ø40, Ø66, Ø100mm. Versatile aiming angle tiltable vertically 0°-90° and rotatable horizontally 360°.

DALI dimmable fixtures can also be controlled by Casambi DALI Broadcast device, please see pages 64-65 for details.

For complete code ordering information, please see page 79.



LED Sources:

High Efficacy:
CRI: 90 | CCT: 2700K, 3000K, 3500K, 4000K, Tuneable White.

Accessories:

- Coloured Glasses Diffuser
 - Linear Spread
 - Honeycomb Louvre
 - Visor
 - Anti-Glare Tube
- Please see page 61 for details.

Zero

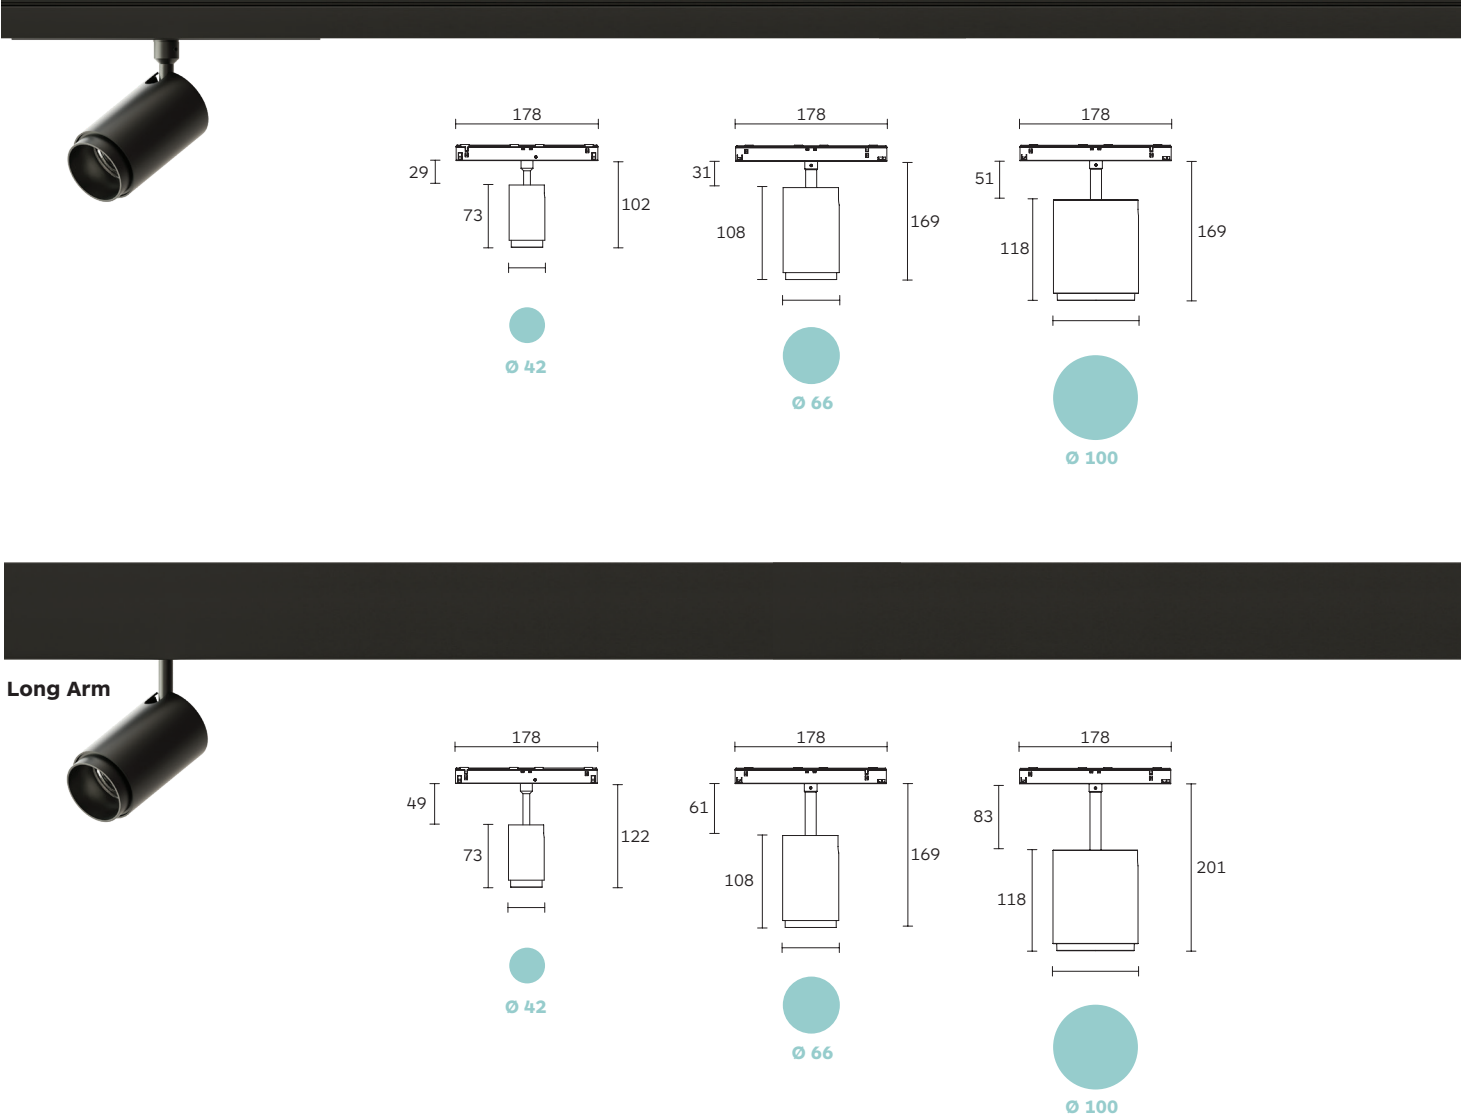


	Product Code	LED Source Code	LED Power	Nominal Lumen	Beam Angle	Dimming Options	CCT Options
CRI>90 3000K High Efficacy	Zero 40	9614	BR21	4W	439 lm	07°	27 2700K
	Zero 40 Long Arm	9631	BC31	6W	705 lm	16° / 26° / 36°	30 3000K
			BU11 (T2*)	7W	831 lm	26° / 32°	35 3500K
	Zero 66	9615	BR21	6W	574 lm	05°	40 4000K
	Zero 66 Long Arm	9632	BC22	12W	1550 lm	16° / 25° / 36°	*T2 2700K-6500K
			BC31	11W	1160 lm	11° / 16° / 32°	
			IU21 (T2*)	13W	1482 lm	24° / 30° / 43°	
	Zero 100	9616	BR21	16W	1756 lm	07°	
	Zero 100 Long Arm	9634	BC33	21W	2569 lm	15° / 24° / 38°	
			BB31 (T2*)	21W	2411 lm	18° / 26° / 34°	

T2 = Tuneable White

Polaris

20 | 20 Wallwasher
EVO 48V Track

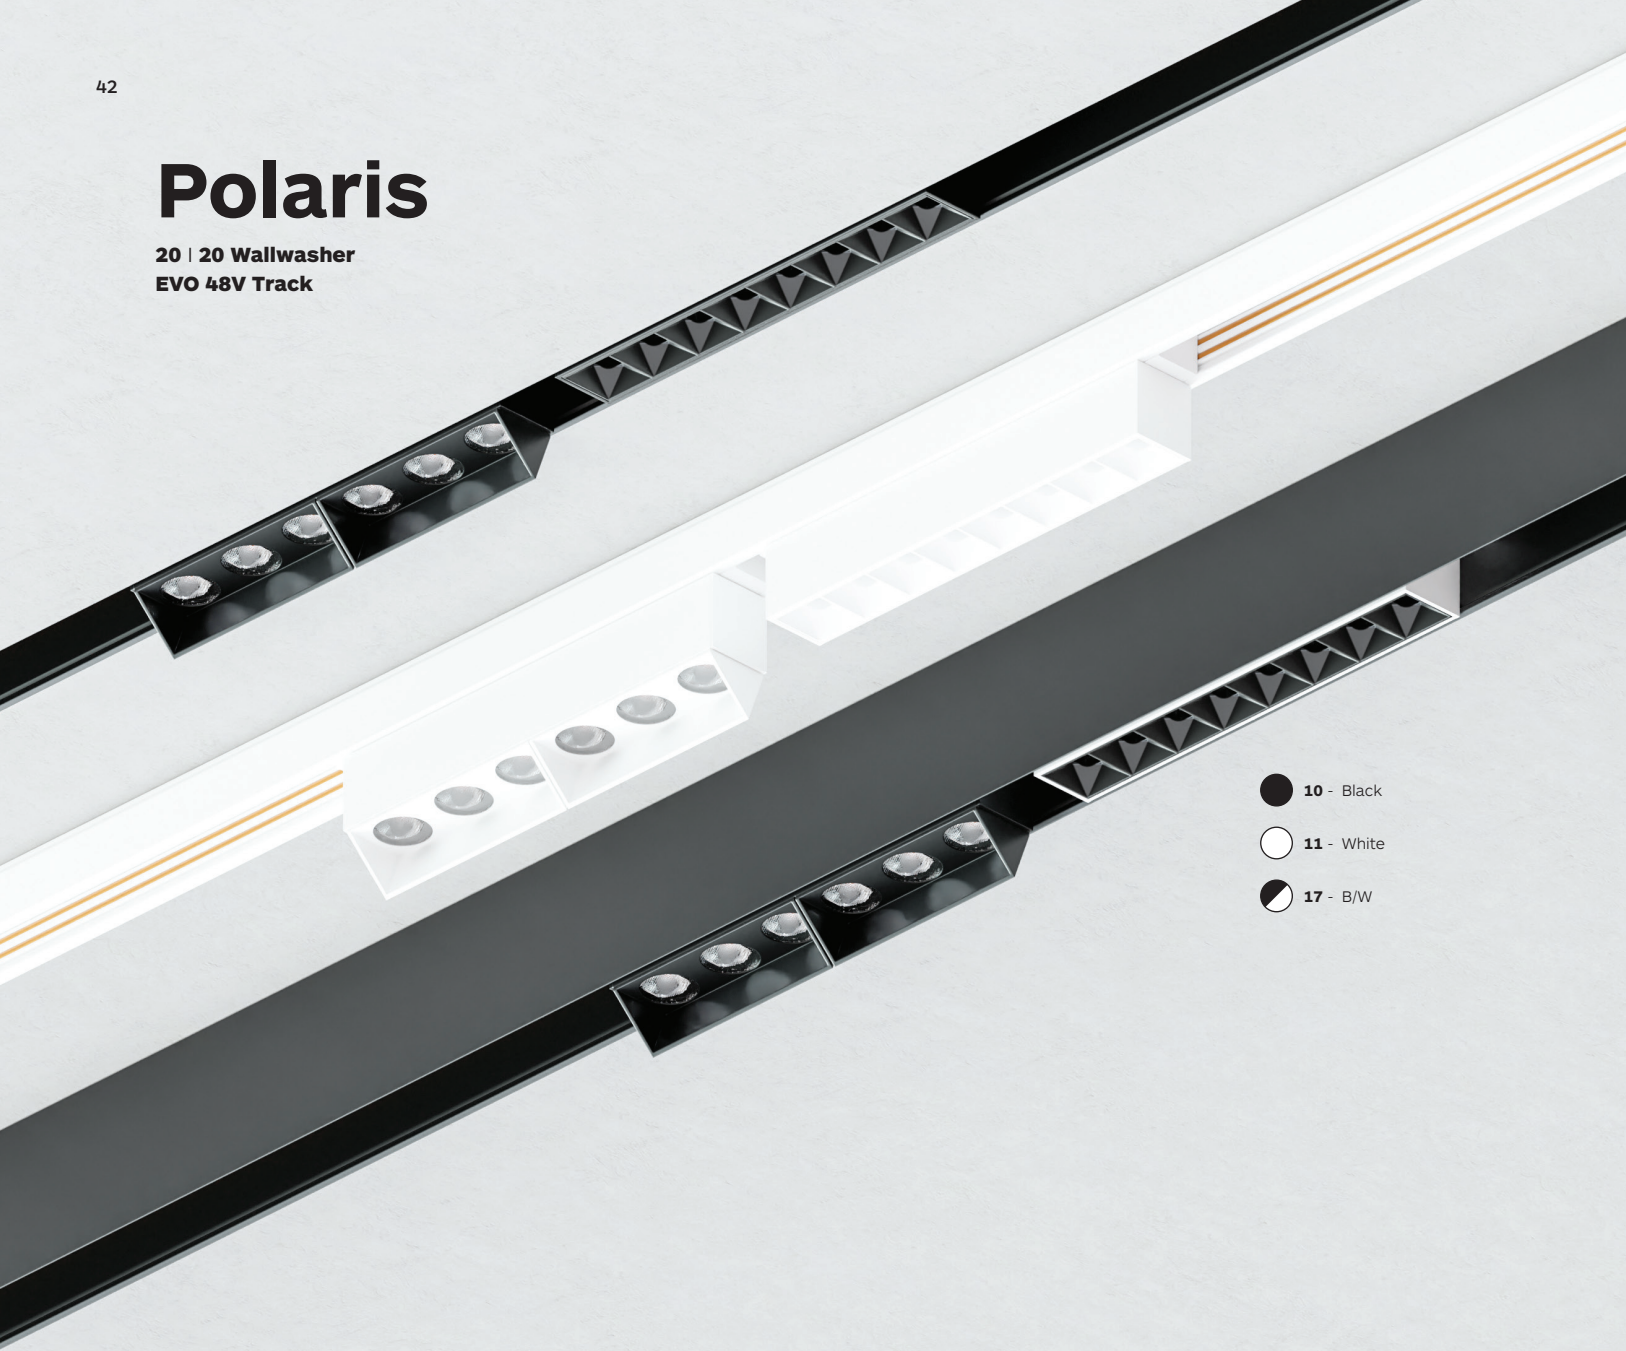

- 10 - Black
- 11 - White
- 17 - B/W

Polaris 20 and Polaris 20 wallwasher compact design linear spotlight, for EVO 48V track and deep recessed track.

The standard version is inclusive of an Integrated diamond faceted no-dazzle screen in thermoplastic. The wallwasher version is inclusive of the integrated louvre.

Integrated track adapter, compatible with different models of EVO 48V track system. Easy to insert and remove from the track. Available in different configurations.

DALI dimmable fixtures can also be controlled by Casambi DALI Broadcast device, please see pages 64-65 for details.

For complete code ordering information, please see page 79.



LED Sources:

High Efficacy:
CRI: 90 | CCT: 2700K, 3000K, 3500K, 4000K, Tuneable White.

Accessories:

For more information about EVO 48V track accessories see pages 66-73.

Polaris 20 & Polaris 20 Wallwasher

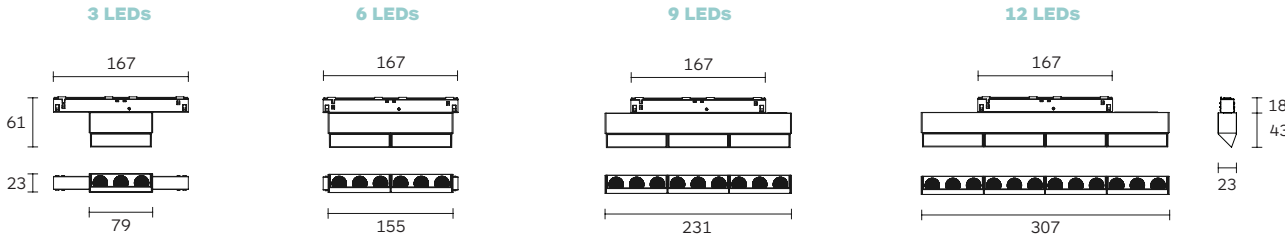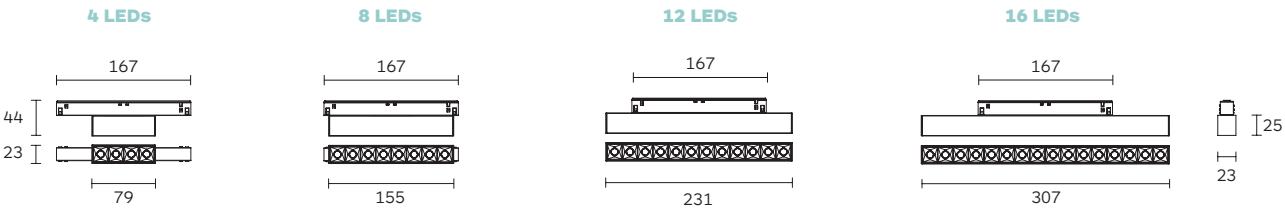


		Product Code	LED Source Code	LED Power	Nominal Lumen	Beam Angle	Dimming Options
CRI>90 3000K High Efficacy	Polaris 20 with 4 LEDs	9601	BO11	4x1W	520 lm	21° / 30° / 45° / 60°	D0 No Dim
	Polaris 20 with 8 LEDs	9602		8x1W	1040 lm		DA Dali Dim
	Polaris 20 with 12 LEDs	9603		12x1W	1560 lm		DC CASAMBI
	Polaris 20 with 16 LEDs	9604		16x1W	2080 lm		
	Polaris 20 Wallwasher with 3 LEDs	9626	BN11	4.2W	525 lm	WW	CCT Options
	Polaris 20 Wallwasher with 6 LEDs	9627		8.4W	1050 lm		27 2700K
	Polaris 20 Wallwasher with 9 LEDs	9628		12.6W	1575 lm		30 3000K
	Polaris 20 Wallwasher with 12 LEDs	9629		16.8W	2100 lm		35 3500K
							40 4000K

WW = Wallwasher. Ordering code; **WW**.
Tuneable White (**TW**) version available on request.

Polaris 20 Opal Diffuser

EVO 48V Track

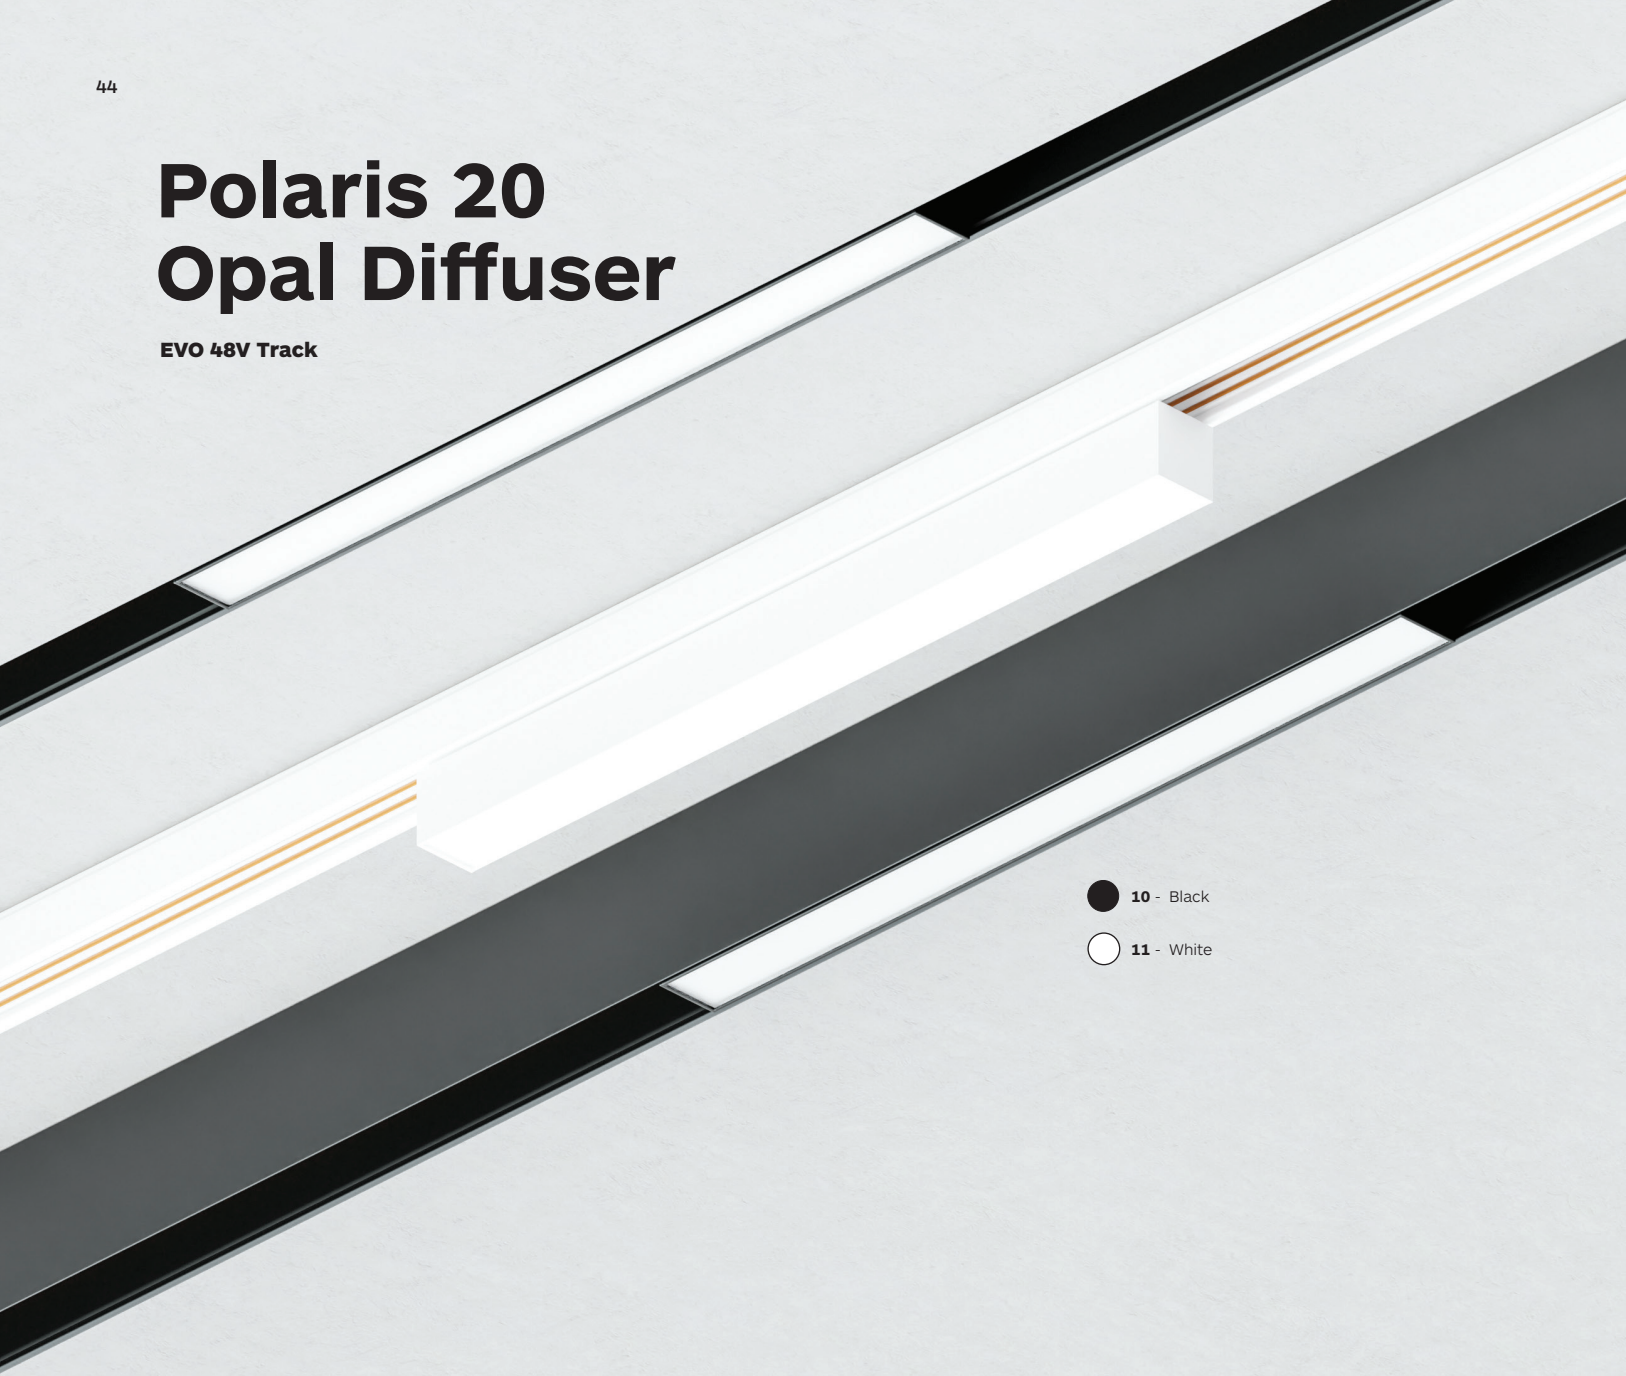

- 10 - Black
- 11 - White

Track mounted EVO 48V spotlight with light body in extruded aluminium inclusive of white opal diffuser for soft and diffuse illumination.

Integrated track adapter, compatible with different models of EVO 48V track system.

Easy to insert and remove from the track.

DALI dimmable fixtures can also be controlled by Casambi DALI Broadcast device, please see pages 64-65 for details.

For complete code ordering information, please see page 79.


LED Sources:

High Rendering:
CRI: 97 | CCT: 2700K, 3000K, 3500K, 4000K, Tuneable White.

Accessories:

For more information about EVO 48V track accessories see pages 66-73.


Polaris 20 Opal Diffuser

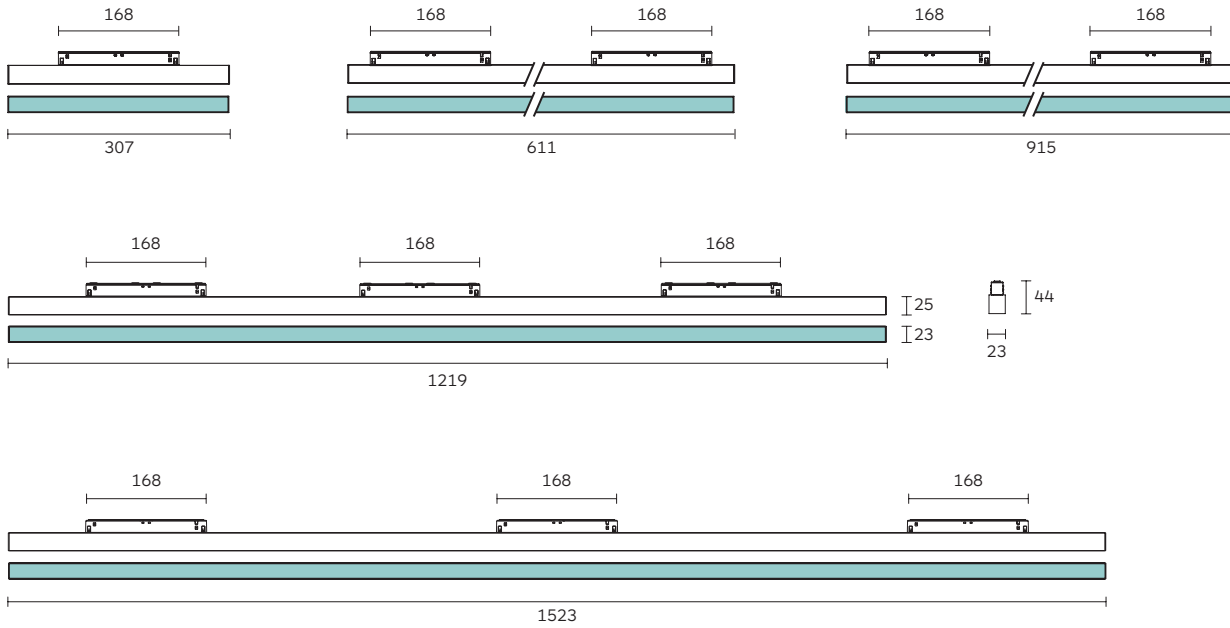

	Product Code	LED Source Code	LED Power	Nominal Lumen	Diffuser	Dimming Options	CCT Options
CRI>97 3000K High Rendering	Polaris 20 Opal Diffuser L:307	9676	BT21	7.4W	945 lm	OD	D0 No Dim
	Polaris 20 Opal Diffuser L:611	9677		15W	1890 lm		DA Dali Dim
	Polaris 20 Opal Diffuser L:915	9678		22W	2835 lm		DC CASAMBI
	Polaris 20 Opal Diffuser L:1219	9679		30W	2780 lm		40 4000K
	Polaris 20 Opal Diffuser L:1523	9680		37W	4725 lm		TW 2700K-5700K

OD = Opal diffuser. Ordering code; **OD**.
Tuneable White (**TW**) version available on request.

-
- A black, angled LED light fixture with 12 individual light sources, mounted on a black track system. The fixture is shown in a perspective view, highlighting its sleek, modern design and the adjustable nature of the track lighting system.



formalighting

Filo

EVO 48V Track



- 10 - Black
- 11 - White

Filo is a technically and aesthetically innovative panel light solution, with an opal front cover, Ø200mm and merely 19 mm thick, and offers homogenous lighting with high intensity. Vertically tiltable 0°-55 and available in regular and deep recessed and pendant EVO 48V track.

Filo's custom engraving algorithm ensures 97% homogeneity of light in an aluminum protective housing and a transparent laser-processed methacrylate plate.

DALI dimmable fixtures can also be controlled by Casambi DALI Broadcast device, please see pages 64-65 for details.

For complete code ordering information, please see page 79.

LED Sources:

High Rendering:
CRI: 97 | CCT: 2700K, 3000K, 3500K, 4000K.



Accessories:

For more information about EVO 48V track accessories see pages 66-73.

Filo

10

11



		Product Code	LED Source Code	LED Power	Nominal Lumen	Diffuser	Dimming Options	CCT Options
<div>CRI>97 3000K</div> <div>High Rendering</div>	Filo 200	9675	002Y	9.4W	439 lm	OD	D0 No Dim	27 2700K
							DA Dali Dim	30 3000K
							DC CASAMBI	35 3500K
								40 4000K
OD = Opal diffuser. Ordering code; OD .								

Polaris

EVO 48V Track Pendant

- 10 - Black
- 11 - White
- 17 - B/W

Pendant luminaire for EVO 48V track systems with light body in extruded aluminium inclusive of integrated diamond faceted no-dazzle screen in thermoplastic. Two standard lengths in 687mm and 915mm; custom size configuration is available in a multiple of 4 x LED (78mm).

Supplied with integrated track adapter, compatible with different models of EVO 48V track system, and 2 x 1.5m pendant wires.

Polaris EVO 48V Track Pendant is available with CASAMBI and DALI control options. DALI dimmable fixtures can also be controlled by Casambi DALI Broadcast device, please see pages 64-65 for details.

For complete code ordering information, please see page 79.


LED Sources:

High Efficacy:
CRI: 90 | CCT: 2700K, 3000K, 3500K, 4000K.

Accessories:

For more information about EVO 48V track accessories see pages 66-73.


Polaris

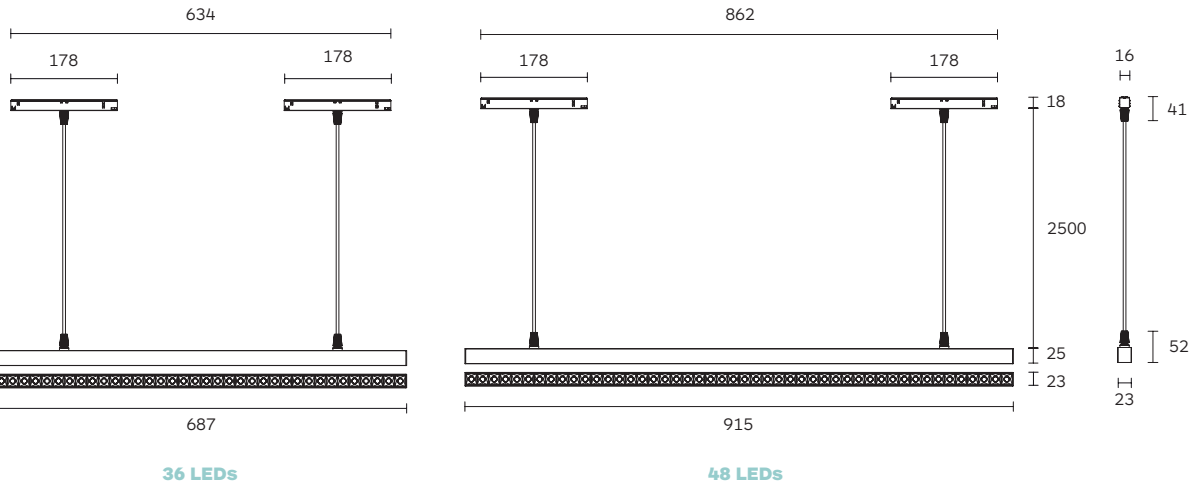

	Product Code	LED Source Code	LED Power	Nominal Lumen	Beam Angle	Dimming Options	CCT Options
CRI>90 3000K High Efficacy	Polaris 20 Pendant with 36 LEDs	9712	36x1W	4680 lm	21° / 30° / 45° / 60°	D0 No Dim	27 2700K
	Polaris 20 Pendant with 48 LEDs	9713	48x1W	6240 lm		DA Dali Dim	30 3000K
						DC CASAMBI	35 3500K
							40 4000K

Polaris Opal Diffuser

EVO 48V Track Pendant



Pendant luminaire for EVO 48V track systems with light body in extruded aluminium inclusive of white opal diffuser for soft and diffuse illumination.

Supplied with integrated track adapter, compatible with different models of EVO 48V track system, and 2 x 1.5m pendant wires.

Polaris Opal Diffuser Pendant is available with CASAMBI and DALI control options. DALI dimmable fixtures can also be controlled by Casambi DALI Broadcast device, please see pages 64-65 for details.

For complete code ordering information, please see page 79.



LED Sources:


High Rendering:
CRI: 97 | CCT: 2700K, 3000K, 3500K, 4000K.

Accessories:

For more information about EVO 48V track accessories see pages 66-73.

Polaris 20 Opal Diffuser

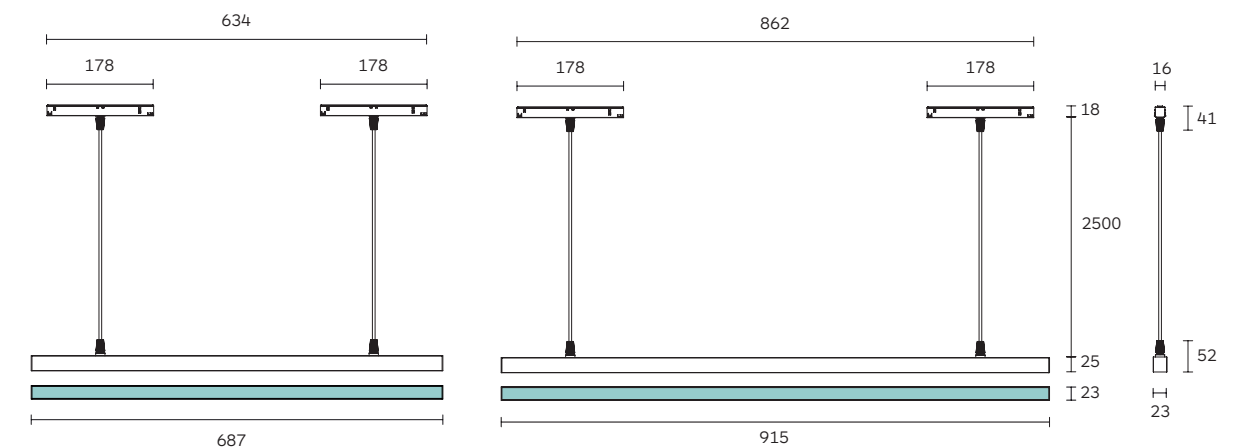

		Product Code	LED Source Code	LED Power	Nominal Lumen	Diffuser	Dimming Options
	Polaris 20 Opal Diffuser Pendant L:687	9724	BT21	16W	2079 lm	OD	D0 No Dim
	Polaris 20 Opal Diffuser Pendant L:915	9726		22W	2835 lm		DA Dali Dim DC CASAMBI

High Rendering

CCT Options

27 2700K
30 3000K
35 3500K
40 4000K

OD = Opal diffuser. Ordering code; **OD**.

Pixo Retro

25 | 38
EVO 48V Track

Pixo Retro offers both classic filament ambient light and modern accent light. LED filament light is designed to resemble a traditional incandescent light bulb with visible filaments for aesthetic and create ambient; the spotlight with multiple beam angle options provides functional accent lighting.

Clean product design with a clear glass body and extruded aluminum, available in two different diameters Ø25mm Ø38mm, and two different lengths.

Pixo Retro available with Casambi and DALI control options. DALI dimmable fixtures can also be controlled by Casambi DALI Broadcast device, please see pages 64-65 for details.

For complete code ordering information, please see page 79.

LED Sources:


Ambient light:
CRI: 80 | CCT: 2700K, 3000K, 3500K, 4000K.

Spot light:
High Efficacy
CRI: 90 | CCT: 2700K, 3000K, 3500K, 4000K.


Accessories:

For more information about EVO 48V track accessories see pages 66-73.

- 10 - Black
- 65 - Embossed matt black
- 11 - White
- 54 - Embossed matt white



Pixo Retro

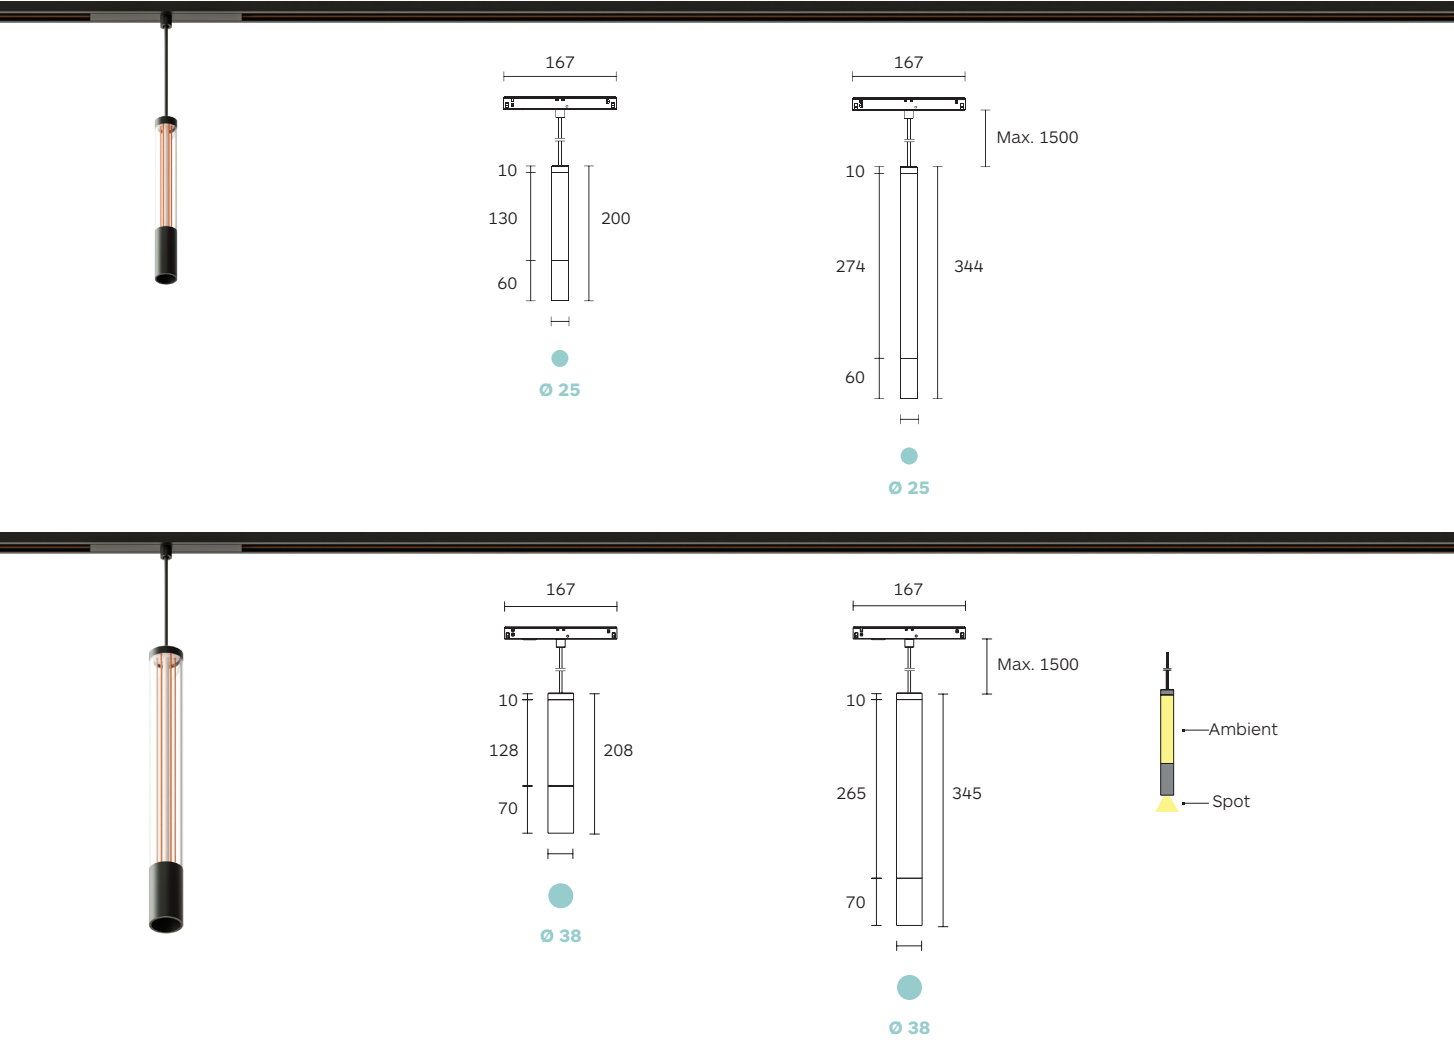

	Product Code	Length Cable Code ¹	LED Power ²		Nominal Lumen		Beam Angle	Dimming Options
			Ambient	Spot	Ambient	Spot		
			CRI>80	CRI>90	CRI>80	CRI>90		
			2200K	2700K / 3000K	2200K	2700K / 3000K		
Pixo Retro 25 L:200	9656	Min. 0100	4.9W	/	397 lm	/	/	DA Dali Dim
Pixo Retro 25 L:344	9657	⋮	/	2.6W	/	276 lm / 299 lm	16° / 20° / 34°	DC CASAMBI
		Max. 1500						
Pixo Retro 38 L:208	9658		4.9W	/	397 lm	/	/	CCT Options
Pixo Retro 38 L:345	9659		/	6.7W	/	723 lm / 780 lm	20° / 25° / 34°	27 2700K
								30 3000K
								35 3500K
								40 4000K

¹ Length cable code from 100mm up to 1500mm. Example: 0750.
² 2 control channels, spot light and ambient light can be controlled separately.

Pixo

25 | 38
EVO 48V Track

Pendant luminaire for EVO 48V track systems with lightbody in extruded aluminum. Light body available in two sizes (Ø25 and Ø36mm) and different lengths, to fit any ceiling height.

Supplied with integrated track adapter, compatible with different models of EVO 48V track system, inclusive of 2 x 1.5m pendant wires.

DALI dimmable fixtures can also be controlled by Casambi DALI Broadcast device, please see pages 64-65 for details.

For complete code ordering information, please see page 79.

LED Sources:

High Efficacy:
CRI: 90 | CCT: 2700K, 3000K, 3500K, 4000K.


Accessories:

For more information about EVO 48V track accessories see pages 66-73.

- 10 - Black
- 65 - Embossed matt black
- 11 - White
- 54 - Embossed matt white



Pixo

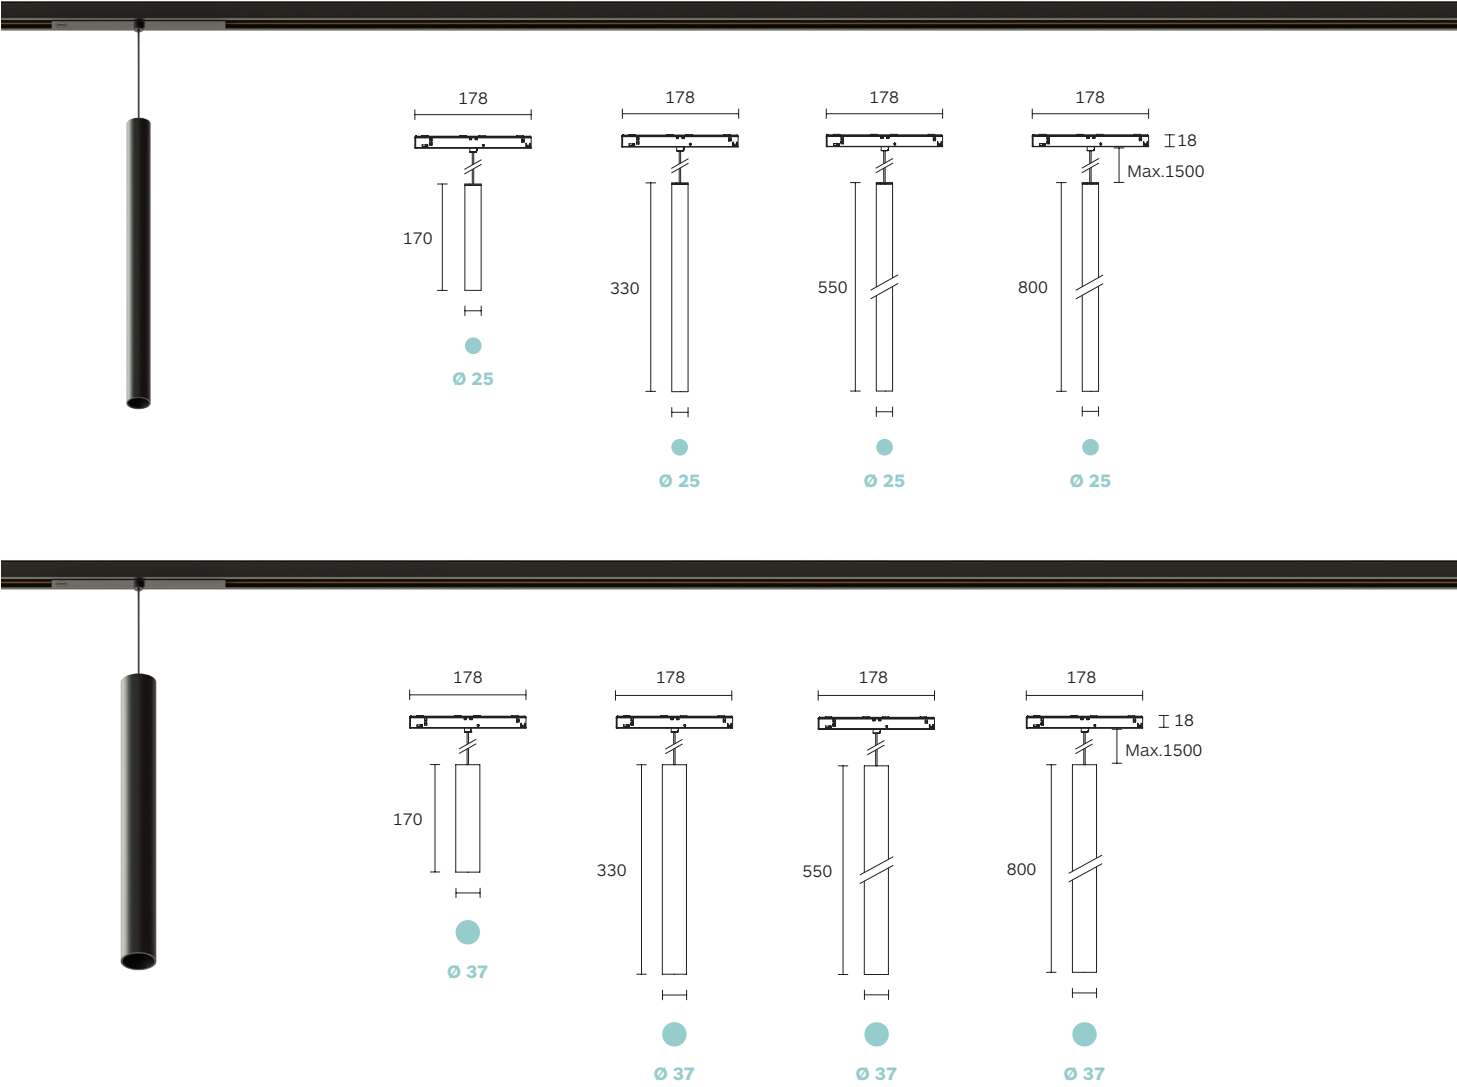

CRI>90
3000K
High
Efficacy

	Product Code	LED Source Code	LED Power	Nominal Lumen	Beam Angle
Pixo 25 L:170	9703	BN11	2W	230 lm	14° / 20° / 26° / 32°
Pixo 25 L:330	9704				
Pixo 25 L:550	9705				
Pixo 25 L:800	9706				
Pixo 36 L:170	9707	BC31	5W	500 lm	20° / 26° / 36°
Pixo 36 L:330	9708				
Pixo 36 L:550	9709				
Pixo 36 L:800	9710				

Dimming Options

- D0 No Dim
- DA Dali Dim
- DC CASAMBI

CCT Options

- 27 2700K
- 30 3000K
- 35 3500K
- 40 4000K

Lucciole

EVO 48V Track

The Lucciole series for EVO 48V track offers a classic & elegant Italian-designed pendant mounted decorative lighting system. It features integrated track adapter, mounts the decorative lamp using suspension cables of length 1500mm (max) with a very easy installation process.

Inspired by a firefly's ability of natural glow, it features suspension lamps of various shapes, sizes, and designs. An eco-friendly and 100% recyclable lamp with diffused light distribution.

DALI dimmable fixtures can also be controlled by Casambi DALI Broadcast device, please see pages 64-65 for details.

For complete code ordering information, please see page 79.

LED Sources:

High Efficacy:
CRI: 90 | CCT: 2700K, 3000K, 3500K, 4000K.


Accessories:

For more information about EVO 48V track accessories see pages 66-73.

- 10 - Black
- 11 - White




Lucciole

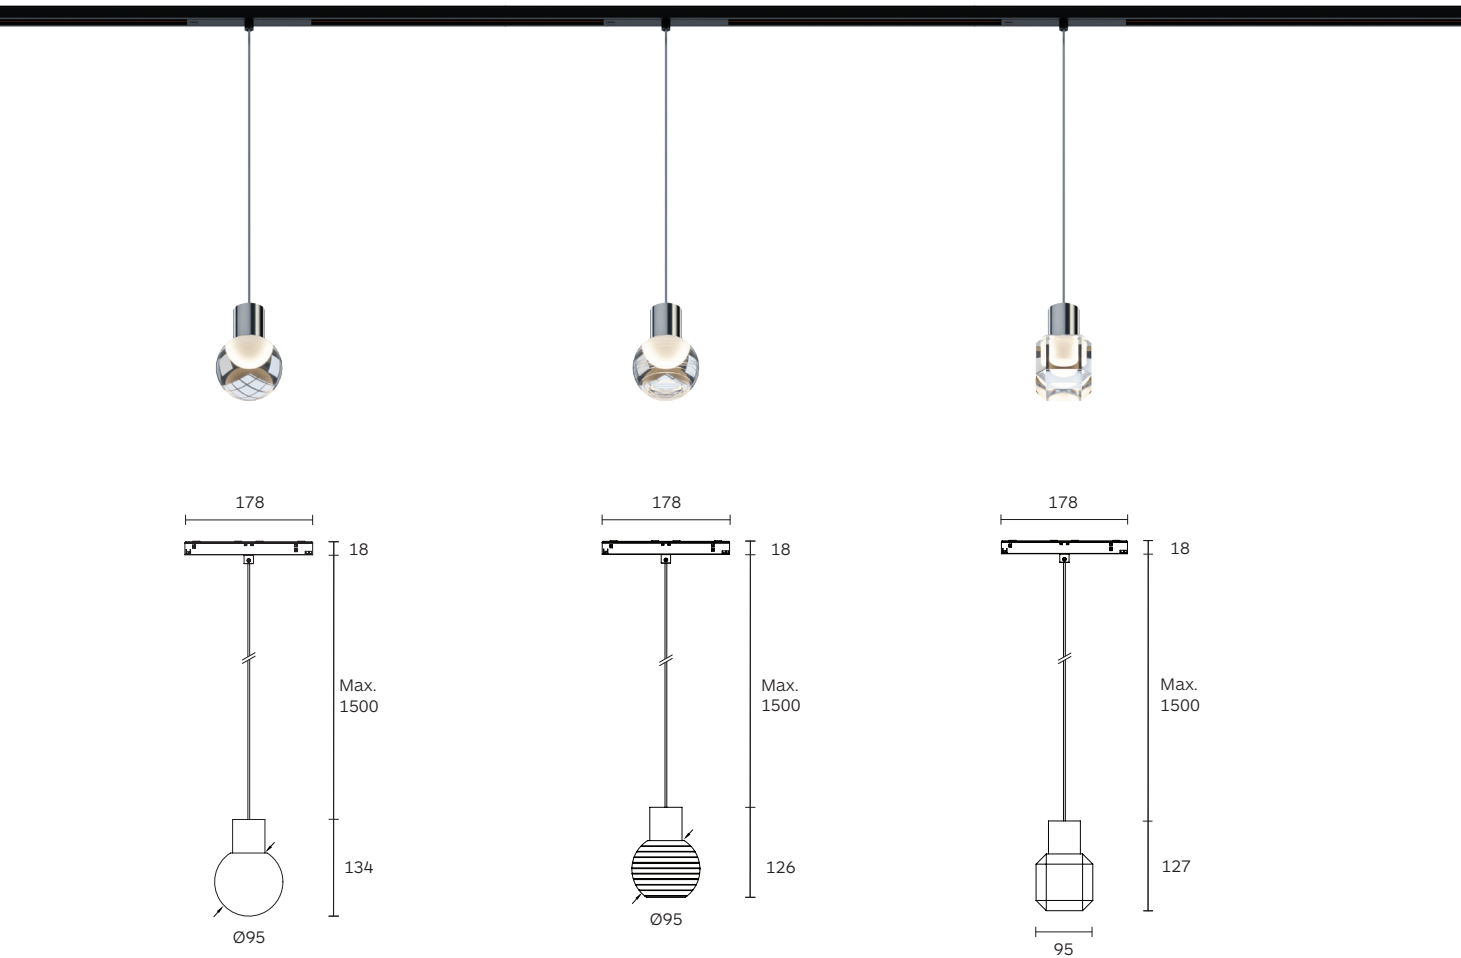

		Product Code	LED Source Code	LED Power	Nominal Lumen	Diffuser	Dimming Options	CCT Options
<div>CRI>90 3000K</div> <div>High Efficacy</div>	Lucciole	9719	BB32	6.5W	724 lm	TD	DC CASAMBI	27 2700K
	Lucciole	9720					DN On-board Dimmer	30 3000K
	Lucciole	9725						35 3500K 40 4000K DW 3000K-1800K

TD = Transparent lenticular diffuser. Ordering code; **TD**.

Optical Accessories

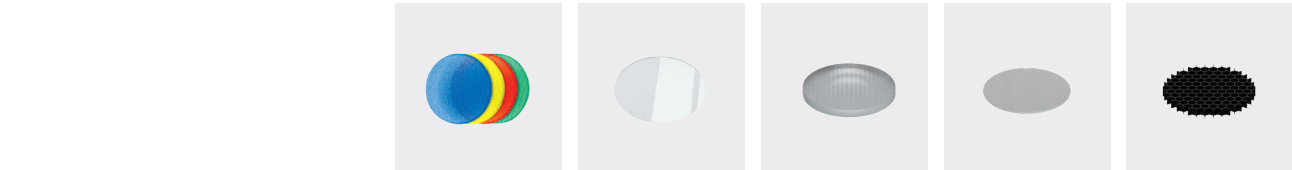


Product / Optical Accessories	Coloured Glasses Diffuser	Opal Lens	Spread Lens	Elliptical Beam Diffuser	Wide Texture Honeycomb Louvre
	25, 42, 55, 85	Colour 41	Colour 41	Colour 41	Colour 10
TicTok 25 & Vivo 25	2G57	2G59	/	2G61	2G30
TicTok 35 & Vivo 35	2G58	2G60	/	2G62	2G31
TicTok 45 ¹ & Vivo 45	2F91	2F94	2F97	2F88	2F71
TicTok 58 ¹ & Vivo 58	2F92	2F95	2F98	2F89	2F83
TicTok 75 & Vivo 75	2F93	2F96	2F99	2F90	2F84




Product / Optical Accessories	Dense Texture Honeycomb Louvre	Cross blade Louvre	Barn Doors	Wallwasher Cone 45°
	Colour 10	Colours 10, 17	Colours 10, 11	Colours 10, 17
TicTok 25 & Vivo 25	2G32	/	/	/
TicTok 35 & Vivo 35	2G33	/	/	/
TicTok 45 ¹ & Vivo 45	2F85	2G01	2G04	2G07
TicTok 58 ¹ & Vivo 58	2F86	2G02	2G05	2G08
TicTok 75 & Vivo 75	2F87	2G03	2G06	2G09

Notes:
¹ No optical accessories are available for TicTok 45, 58 Zoom series.

Optical Accessories

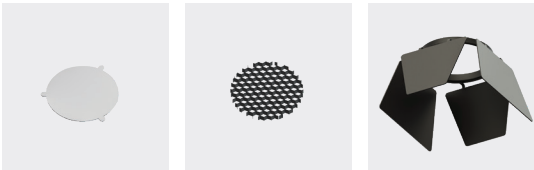

Product / Optical Accessories	Filter	Honeycomb	Barn Doors
		Colour 10	Colours 10, 11
Zero 33	G2A6	G2A7	G2A1
Zero 33 Long Arm			

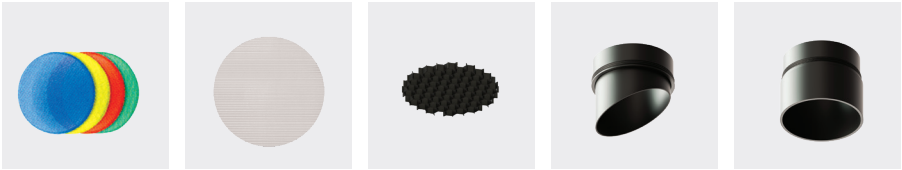

Product / Optical Accessories	Coloured Filters	Linear Spread	Honeycomb Louvre	Visor	Anti-glare Tube
	Colours 25, 42, 55, 85	Colour 41	Colour 10	Colours 10, 17	Colours 10, 17
Zero 40 & Zero 40 with Long Arm	2E36 [#]	2E44 [#]	2E35	/	2E43
Zero 66 & Zero 66 with Long Arm	2D63 [#]	2D62 [#]	2C65	2D94	2D67
Zero 100 & Zero 100 with Long Arm	2E10 [#]	2E12 [#]	2C66	2E14	2E16



Product / Optical Accessories	Gobo film	Product / Optical Accessories	Gobo film
	Colour 10		Colour 10
Zero Framing Projector 28	2G92	Zero Framing Projector 38	2G24

Notes:
[#] With holder

TicTok & Vivo

The circular series



TicTok provides innovation leadership with the new Eterno technology. The easy-to-change COB module provides a ready-to-use solution for greater flexibility, energy efficiency, and sustainability.

LED Modules & Lens compatibility

For TicTok & Vivo products

Product compatibility	LED Module	CRI	LED Power	LENS Compatibility Code			
				15°	20°	32°	
TicTok 25 Codes: 96B2 96C3	E017	CRI> 90	3.4W	L021	L022	L023	
Vivo 25 Codes: 96A8 96C8							
				05°	20°	24°	38°
TicTok 35 Codes: 96B3 96C4	E063	CRI> 90	2.1W	L030	/	/	/
Vivo 35 Codes: 96A9 96C9	E013	CRI> 93	5W	/	L024	L025	L026
				08°	18°	28°	36°
TicTok 45 Codes: 9662 9663 96H8	E025	CRI> 93	9W	/	L014	L015	L016
Vivo 45 Codes: 96B0 96D0 96J1	E051	CRI> 95	8W	L032	/	/	/
	E020	CRI> 98	9W	/	L014	L015	L016
				14°	18°	24°	25° 36° 37°
TicTok 58 Codes: 9664 9665 96H9	E026	CRI> 93	14W	/	L017	/	L018 / L019
Vivo 58 Codes: 96B1 96D1 96J2	E031	CRI> 93	15W	L017	/	L018	/ L019 /
	E027	CRI> 98	14W	/	L017	/	L018 / L019
				12°	14°	26°	36° 37°
TicTok 75 Codes: 9666 9667 96J0	E029	CRI> 93	18W	L008	/	L009	L010 /
Vivo 75 Codes: 96C7 96D2 96J3	E006	CRI> 98	18W	/	L008	L009	/ L010
				BS (12° - 37°)			
TicTok 45 Zoom Codes: 96A6 96C5	E009	CRI> 90	6W	2G63			
				BS (17° - 27°)			
TicTok 58 Zoom Codes: 96A7 96C6	E004	CRI> 93	15W	2G64			

Casambi DALI Broadcast



Casambi DALI Broadcast

For EVO track 48VDC input



Casambi DALI Broadcast offers a cutting-edge solution for controlling wireless luminaires on low-voltage (48V) tracks.

Through Casambi Bluetooth Low Energy (BLE) communication with control apps, all you need is a smartphone or tablet to take charge of your lighting system.

Imagine having complete control over the lighting in your space without the hassle of wiring, control units, or routers. With Casambi Broadcast technology, this dream is now a reality.

Add a Casambi DALI broadcast device (9269) directly to EVO 48V track, and select a product with a DALI driver included (DA).

Group Configuration - up to 64 luminaires

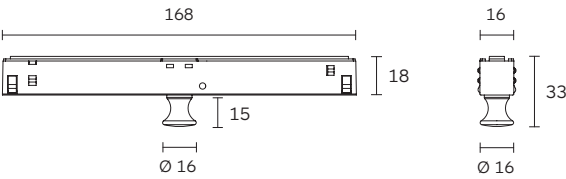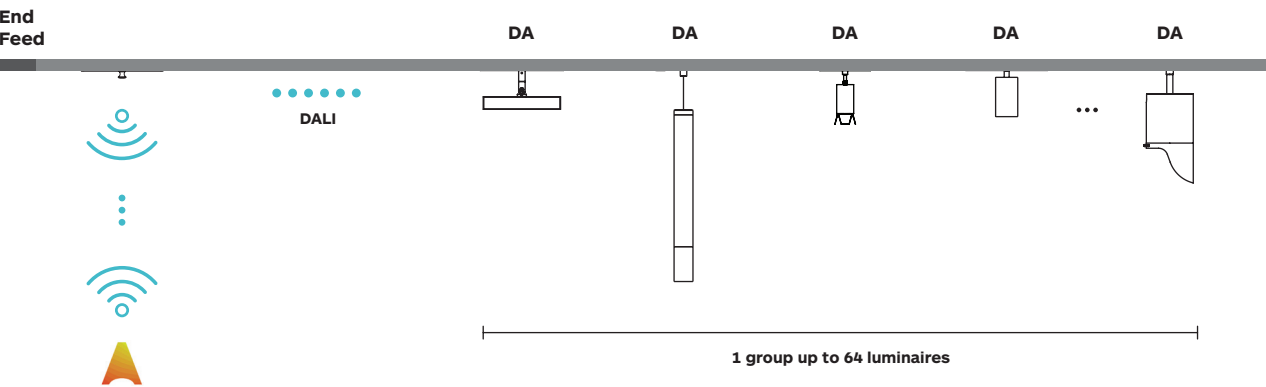


Wireless control device	
Code:	9269
Nominal Input Voltage:	24-50 Vdc
Current:	48V - 0.06 A
Output Voltage:	18 - 18.5 V DC
Output current in short circuit:	200 mA
Output channel:	1
Management protocol:	DALI

EVO 48V Track Options


Recessed Trim Track

2ST8 + Art. 9202 Bracket with spring for 2ST8 included

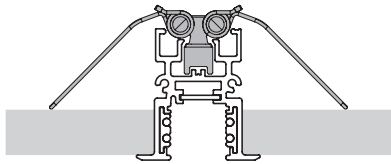


Recessed Trimless Track

2ST3 + Art. 9201 Bracket for 2ST3 trimless track included




Deep Recessed Trim Track

2ST5

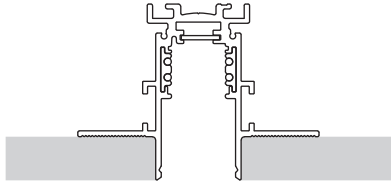


Deep Recessed Trimless Track

2STA

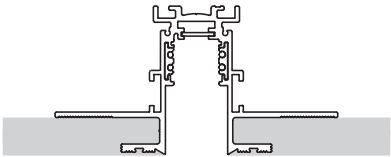


Deep Recessed Track Trim

2STK

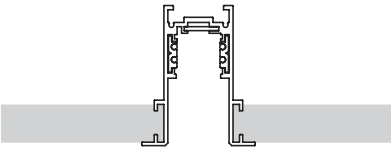


Pendant Track


2ST6 +
Pendant
Kits
Art.9226




2ST2 +
Deep
Pendant
Kits
Art.9226




2ST7 +
Pendant
Kits
Art.9226



2ST9 +
Deep
Pendant
Kits
Art.9226

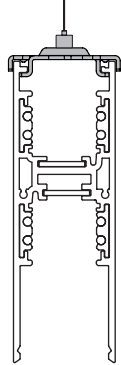


2ST4 +
Straight
Connector
with Wire
Hanger
for Track
Art.9284




Pendant Kit

Pendant
Kit
Art. 9226




Surface Track


2ST6 +
Surface
Kits
Art.9225




2ST2 +
Deep
Surface
Kits
Art.9225



2ST1



2ST4 +
Pendant
Rod
Art.9282

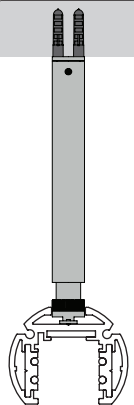












Surface Kit


Surface
Kit
Art. 9225




Compatibility

											
Track Options/ Product name	2ST1	2ST4	2ST6	2ST2	2ST7 Up & Down	2ST9 Up & Down	2ST8	2ST3	2ST5	2STA	2STK
TicTok & Vivo 25 / 35 / 45 / 58 / 75	✓	✓	✓		✓	✓	✓	✓			
TicTok & Vivo Long Arm 25 / 35 / 45 / 58 / 75	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
TicTok Zoom 45 / 58	✓	✓	✓		✓	✓	✓	✓			
TicTok Zoom 45 / 58 Long Arm	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
TicTok & Vivo Top Mounted 45 / 58 / 75					✓	✓					
Zero Framing Projector Zero Compasso Wallwasher Zero 33 / 40 / 66 / 100 Zero Zoom 80	✓	✓	✓		✓	✓	✓	✓			
Zero Framing Projector Zero 33 / 40 / 66 / 100 Zero Zoom 80 Long Arm	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Polaris 20 Polaris 20 Wallwasher Polaris 20 Opal Diffuser	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Polaris 20 Adjustable	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Filo	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Polaris 20 Polaris 20 Opal Diffuser Pendant	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Pixo Retro 25 & 38 Pixo 25 & 36 Pendant	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Lucciole Pendant	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓


Mounting Accessories

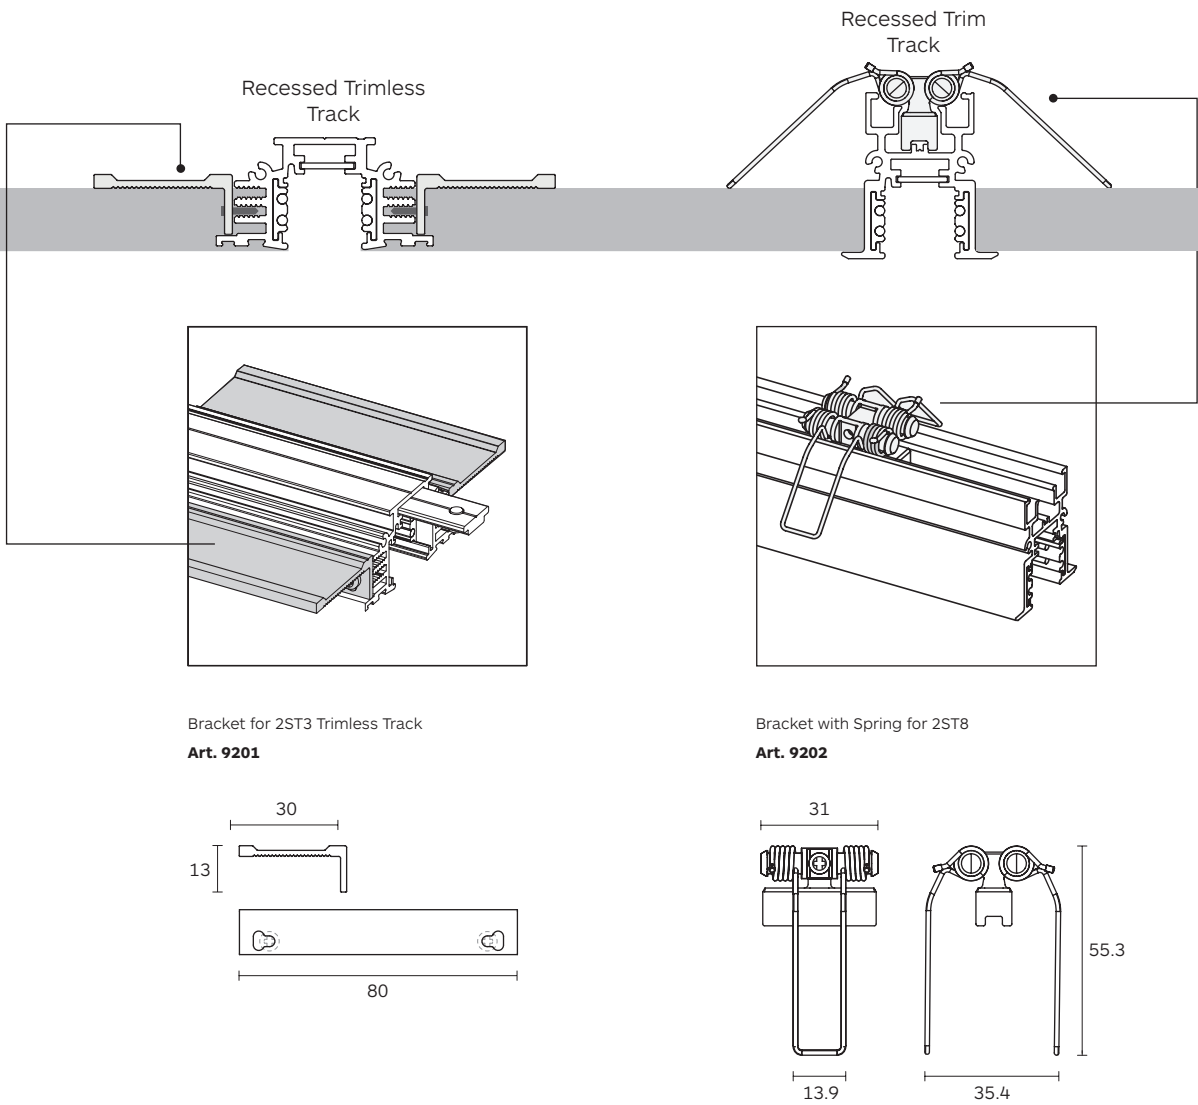


Mounting Accessories

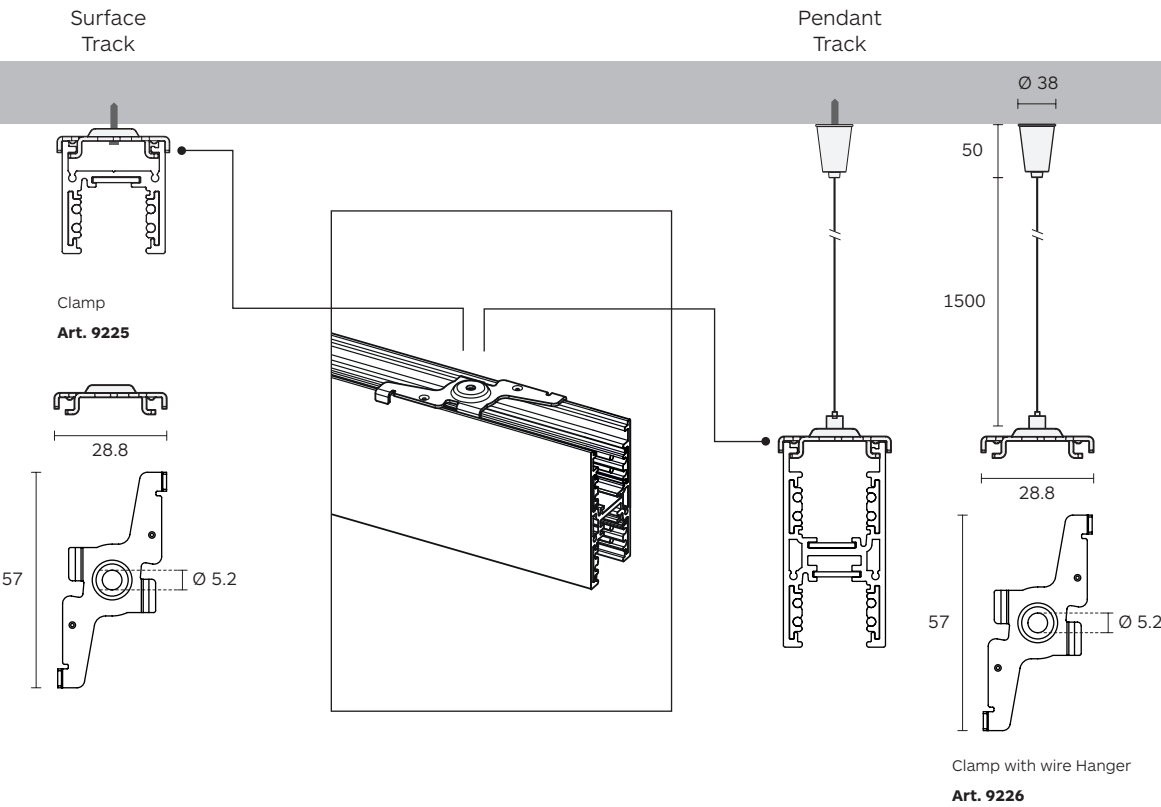

EVO 48V Track

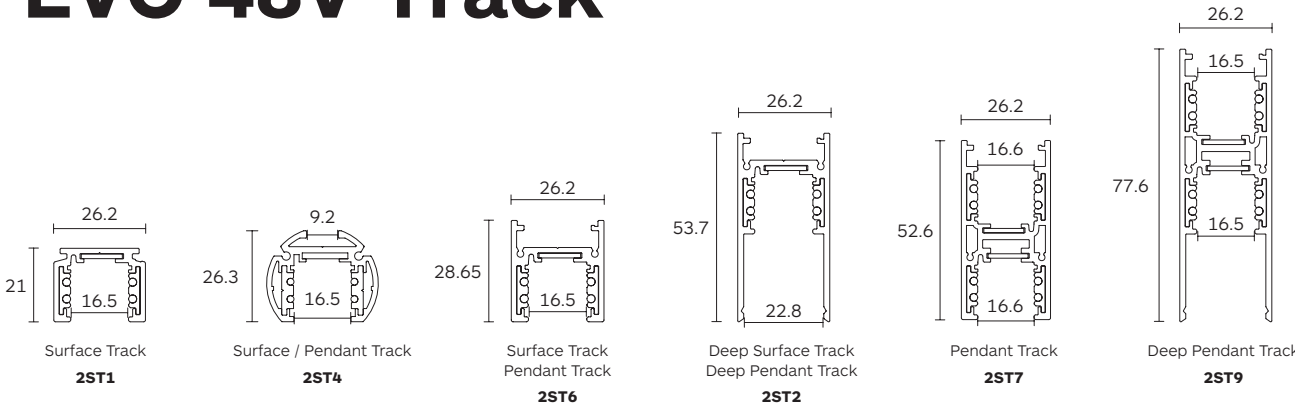


EVO 48V Track

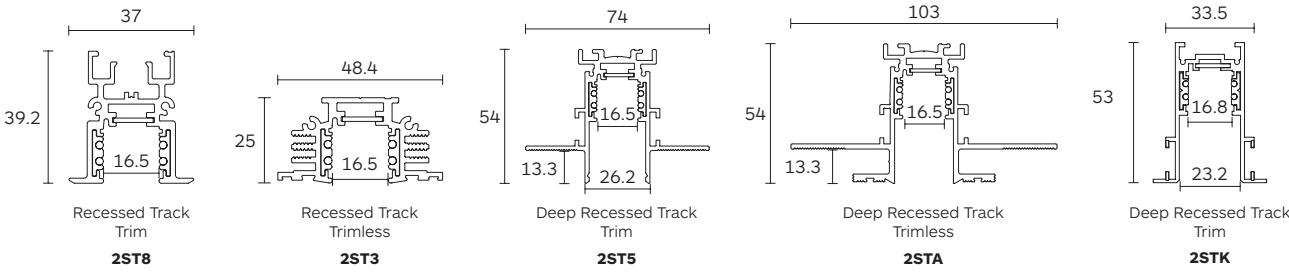

Installation Components for EVO 48V Track


9201

Bracket for 2ST3 trimless track

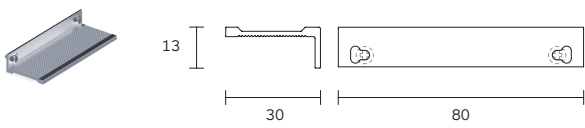


9202

Bracket with spring for 2ST8

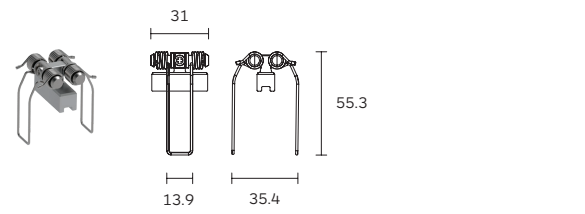


9225


Clamp

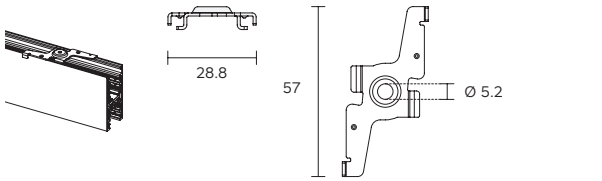


9226

Clamp with Wire Hanger

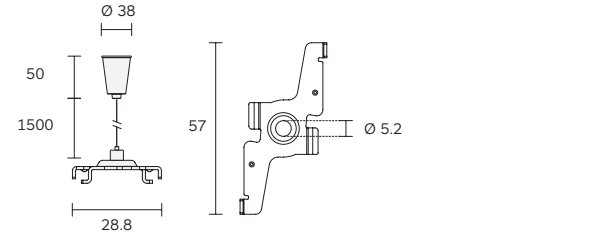


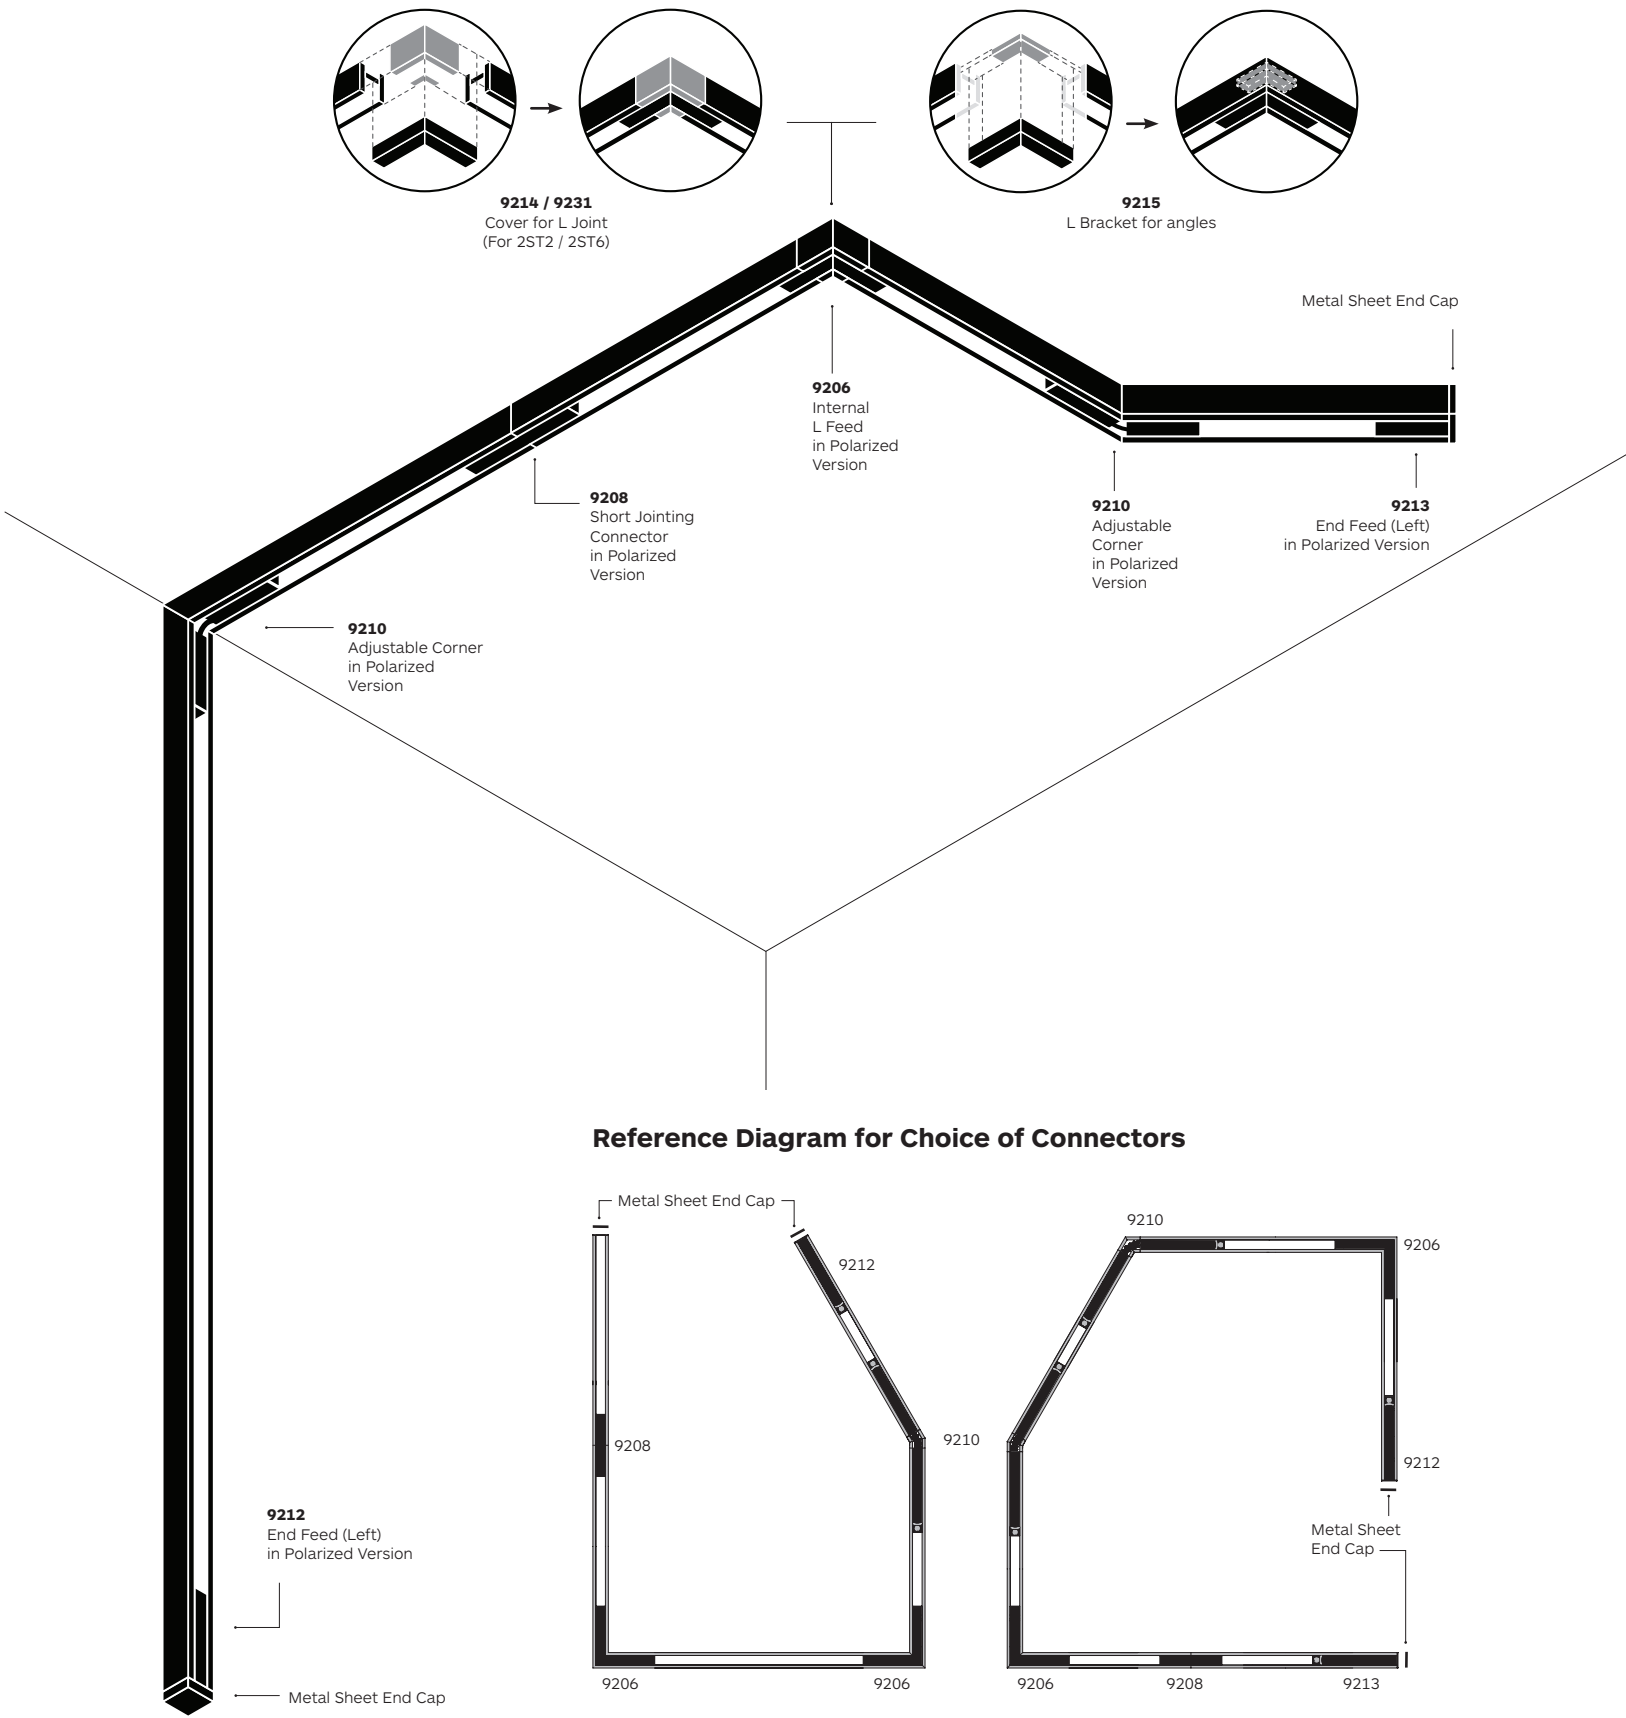


Accessories





9204 Mounting Bracket for 2STK







9207 End Cap for 2STK

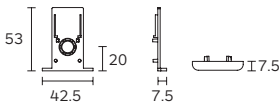





9209 Flex Corner in Polarized with Cable







9212* End Feed (Left) in Polarized Version
9213* End Feed (Right) in Polarized Version







9215 L Bracket for angles (For 2ST2, 2ST6)







9216* Sheet End Cap for 2ST1
9217* Sheet End Cap with hole for 2ST1

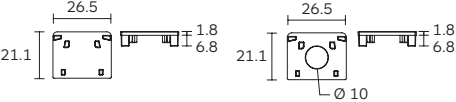





9218* Metal sheet End Cap for 2ST2







9219* Metal sheet End Cap with hole for 2ST2, 2ST5 & 2STA

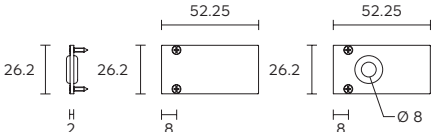





9206* Internal L feed in Polarized Version







9208* Short Jointing connector in Polarized Version







9210* Adjustable corner in Polarized Version







9214* Cover for L Joint (For 2ST2)







9220* Metal sheet End Cap for 2ST3







2G54 L-bracket (For 2ST3, 2ST5, 2STA & 2ST8)






9221* Sheet End Cap for 2ST6
9222* Sheet End Cap with hole for 2ST6

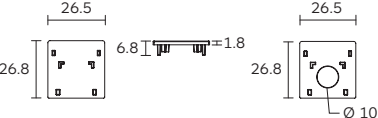





9223* Metal sheet End Cap for 2ST8

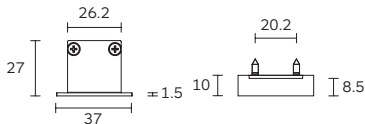


Accessories





9227* Reinforcing Bracket for Jointing Conector with Track 2ST3, 2ST5, 2ST8, 2STA







9230* Metal sheet End Cap for 2ST7
9224* Metal sheet End Cap for 2ST9

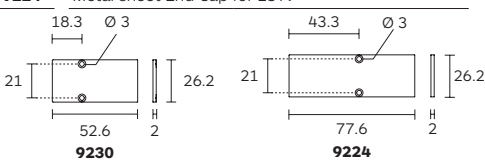





9231 Cover for L Joint (For 2ST6)

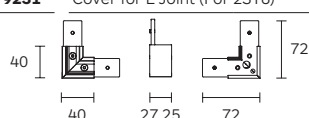





9234 Bracket for Jointing Connector with Track 2ST2, 2ST6, 2ST8







9272 Wire Hanger for 2ST5 & 2STA Track







9273 2ST5 & 2STA Track Suspension Rod Accessories







9274 2ST5 & 2STA Track Connector Accessories







9275* Cover for L Joint (For 2ST5)







9276* Cover for 2ST9 L Joint







9277* Cover for 2STA L Joint







9282 Pendant Rod for 2ST4







9283 End Cap for 2ST4







9284 Straight Connector with Wire Hanger for Track 2ST4







9287 End Cap with Hole for 2ST5






9288 End Cap with Hole for 2STA

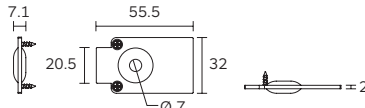





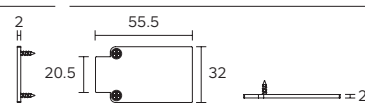







9289 End Cap for 2STA




Notes:
* Available in colours 10, 11.
** Available in colours 10, 11, 54, 65.

Power Supply & Control Options


Power Supply

					
220-240VAC input, 48VDC output 75w power supply for EVO 48V LV track	220-240VAC input, 48VDC output 150w power supply for EVO 48V LV track	220-240VAC input, 48VDC output 100W power supply for EVO 48V LV track	220-240VAC input, 48VDC output 200W power supply for EVO 48V LV track	220-240VAC input, 48VDC output 100W power supply for EVO 48V LV track deep recessed	
Code	2E28	2E29	2F07	2F08	2F09
Size	100 x 235 x 31	100 x 235 x 31	23 x 225	23 x 315	38 x 225
					


Universal DALI

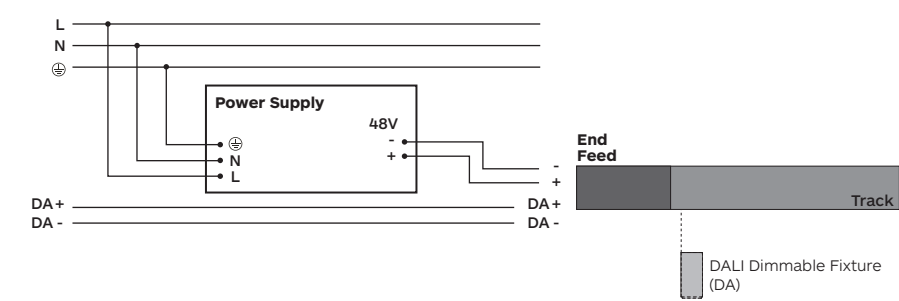

Bluetooth wireless Control

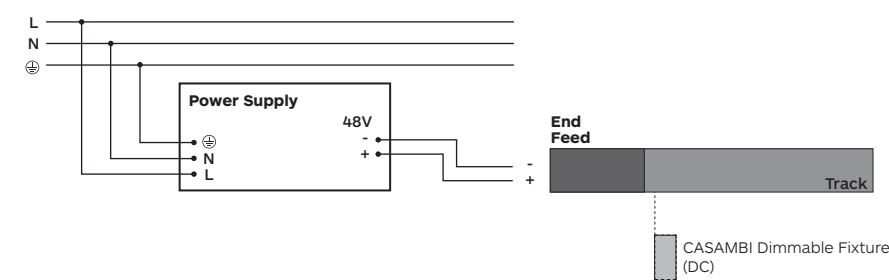

Fixed Output

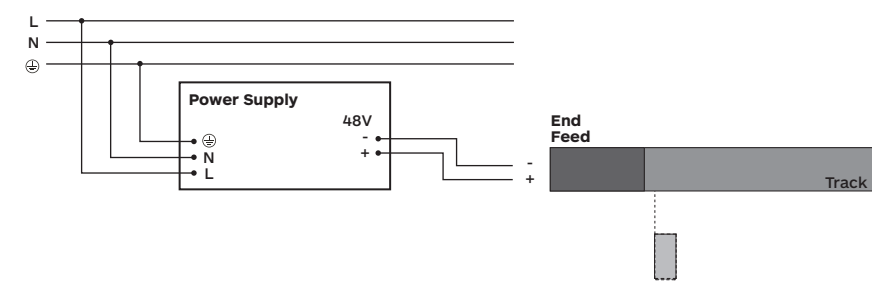


Drop Voltage Table

A Distance power supply/feed unit (2x1.5mm²)				
	5m	10m	20m	30m
B Track Length with Δv≤5.5% (m)				
Power Supply (W)	(m)	(m)	(m)	(m)
60	50	50	50	50
100	50	50	40	25
150	50	40	20	Not admitted
200	40	30	Not admitted	Not admitted
250	35	20	Not admitted	Not admitted

Information refers to a load equivalent to the power supplied and equally distributed on the relevant lenght in the table.

Remote Power Supply

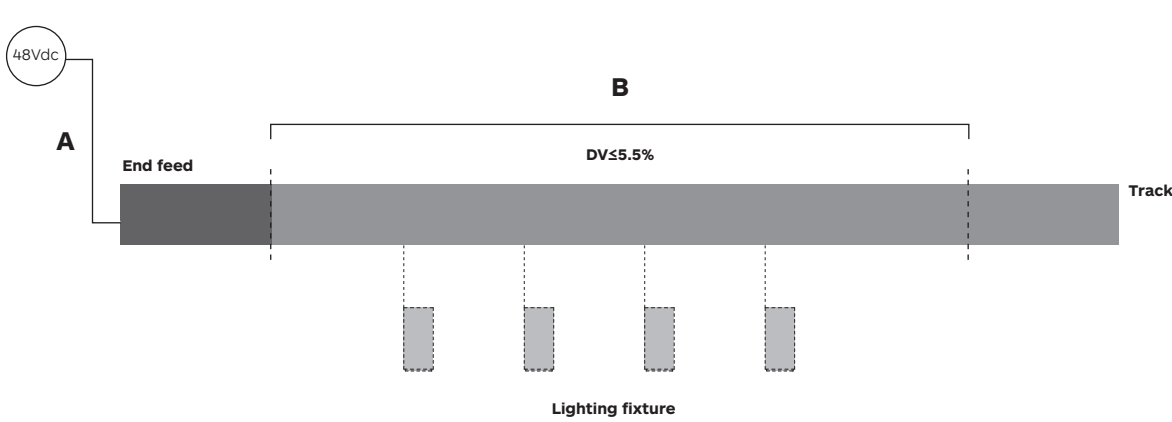

Symbols & Icons
Code system
Global presence

Symbols & Icons

CE Mark - Product complies with CE Standard.



CSA Mark - Product complies with USA & Canada Standard.



Other third party product approvals

Our products include electrical and electronic components that carry other world wide Test House approvals such as those shown:



CLASS I
Luminaires of insulation Class I - with earth connector.



CLASS II
Luminaires of insulation Class II - With safety isolation, this means the tension conductions element are protected by additional isolation.
The isolation of an earth wire it is not necessary and the connection to it is not allowed.



CLASS III
Luminaires of isolation Class III - designed for operation of protected low voltage supply (>42V).



Zoom



Passes the 850° glow wire test in accordance with IEC 695-2-1.



Passes the 960° glow wire test in accordance with IEC 695-2-1.



Dim2Warm



Tuneable White



CASAMBI



Recyclable




IP__ Degree of Ingress Protection




1st Number	Protection Against Dust and Solid Objects	2nd Number	Protection Against Moisture and Liquids
0	No-Protection	0	No-Protection
1	Protection against solid objects >50 mm	1	Protection against dripping water
2	Protection against solid objects >12 mm	2	Protection against dripping water tilted > 15 deg
3	Protection against solid objects >2.5 mm	3	Protection against spraying water > 30 deg
4	Protection against solid objects >1 mm	4	Protection against spraying water
5	Dust - protected	5	Protection against water jet
6	Dust - tight	6	Protection against waves
		7	Protection against the effects of immersion
		8	Protection against submersion


Body Color




10 Black (RAL 9004)




65 Embossed matt black (RAL 9017)



11 White (RAL 9003)




54 Embossed matt white (RAL 9016)




*17 Black (RAL 9004) / White (RAL 9003 (B&W))

Code System

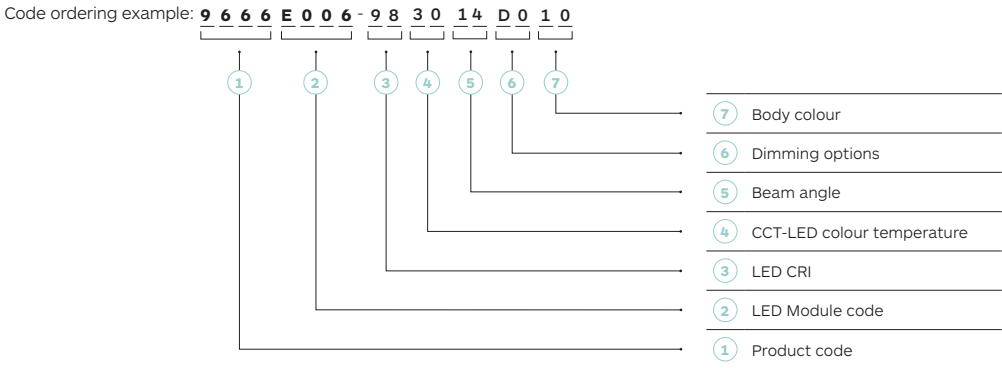


LED CRI		CCT-LED Colour temperature		Dimming Options		Body Colour	
90	CRI > 90	27	Warm White 2700K	D0	No dimming	10	Black (RAL 9004)
93	CRI > 93	30	Warm White 3000K	DA	Dali Dim	11	White (RAL 9003)
95	CRI > 95	35	Warm White 3500K	DC	CASAMBI	*17	Black (RAL 9004) / White (RAL 9003 (B&W))
98	CRI > 98	40	Neutral White 4000K	DN	On-board Dimmer	54	Embossed matt white (RAL 9016)
						65	Embossed matt black (RAL 9017)
						Notes:	
						*17: white light body with black integrated louvre. For black body with white integrated louvre consult us.	


How to order




TicTok 45




TicTok 58




TicTok 75




10 - Black



65 - Embossed matt black



11 - White



54 - Embossed matt white

Dimming Options

D0 No Dim

DA Dali Dim

DC CASAMBI

DN On-board Dimmer

CCT Options

27 2700K

30 3000K

35 3500K

40 4000K

	Product Code	LED Module Code	LED Power	Nominal Lumen	Beam Angle
TicTok 45	9662	E020	9W	901 lm	18° / 28° / 36°
TicTok 58	9664	E027	14W	1458 lm	18° / 25° / 37°
TicTok 75	9666	E006	18W	1765 lm	14° / 26° / 37°

1 Product code

2 LED Module code

3 LED CRI

4 CCT-LED colour temperature

5 Beam angle

6 Dimming options

7 Body colour

9666

E006

98

30

14

D0

54

Global presence

Celebrating over 50 years of vision, dedication and innovation, formalighting's versatile and high-quality product offerings extends internationally via our headquarters in Hong Kong, London, Milan and Shanghai. Our well chosen and selected partners as well as our affiliated international offices broaden our global presence further in markets such as USA, Australia, Japan, South East Asia, India and the Middle East.

Through our commitment to growth and investment within formalighting's professional team, infrastructure and product ranges, we are able to provide increasing service to our global retail and hospitality clients as well as lighting designers and specifiers strengthening our position as a leading international supplier of innovative architectural lighting solutions and systems.

With over 50 years' experience in designing and manufacturing architectural lighting, formalighting's comprehensive portfolio offers a competitive range of European designed and expertly engineered products that carry CB, CE, CCC and UL certifications.

Furthermore formalighting's latest award-winning motorized range of track, pendant, and recessed fixtures, featuring remote-controlled adjustable pan and tilt, dim, dim to warm, tuneable white and beam shaping lens, are available worldwide incorporating the latest, most advanced lighting technologies.

MILAN

EUROPE HEADQUARTERS

Tel (+39) 02 9354 0300
Fax (+39) 02 9343 5117
E- mail info-europe@formalighting.com

HONG KONG

ASIA HEADQUARTERS

Tel (+ 852) 2516 6500
Fax (+ 852) 2516 6525
E- mail info-asia@formalighting.com

NEW YORK

LOCAL SALES OFFICE

E- mail info-us@formalighting.com

SHANGHAI

LOCAL SALES OFFICE

E- mail info-china@formalighting.com

LONDON

LOCAL SALES OFFICE

E- mail info-uk@formalighting.com

AUSTRALIA

LOCAL SALES OFFICE

Tel (+61) 488 567 388
E- mail info-australia@formalighting.com

INDIA

LOCAL SALES OFFICE

Tel (+91) 9686351257
E- mail info-india@formalighting.com

formalighting is constantly developing and improving its products therefore all information, drawings illustrations, specifications, photometric values in this catalogue are indicatives and shall not form part of any commitment by our company that reserves the right to change specifications without prior notification or public announcement.

Technical information on the installation-instruction has precedence over the information in the catalogue.

Our general terms and conditions shall apply notwithstanding any stipulation on the contrary to all the orders and agreement with formalighting. You can obtain a copy of these conditions on demand.

Publication date: January 2025
©Copyright formalighting

With thanks to all contributors for the realization of this catalogue

Designed by formalighting's Graphic Design Department

No part of this catalogue may be copied without written authorization of formalighting

formalighting

HONG KONG

-

LONDON

-

MILAN

-

SHANGHAI

-

USA