


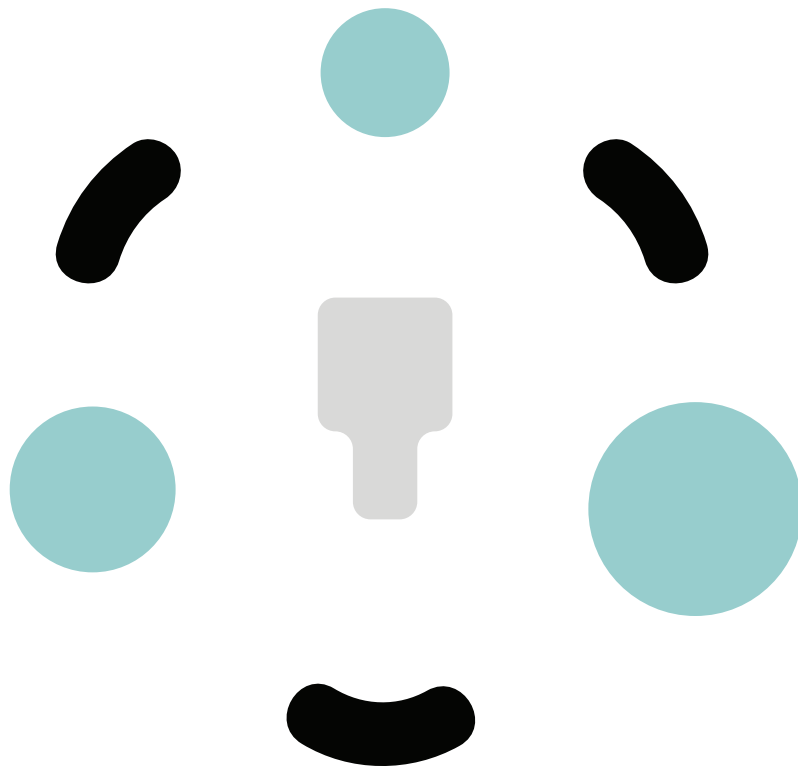

formalighting

TicTok & Viivo Mono Point Series

2026

TicTok & Viivo

The Mono Point Series


Ceiling Surface

Recessed
Trim & Trimless



Trimless (for Millwork)

Softtrack Surface mounted
with external wires

Viivo Series

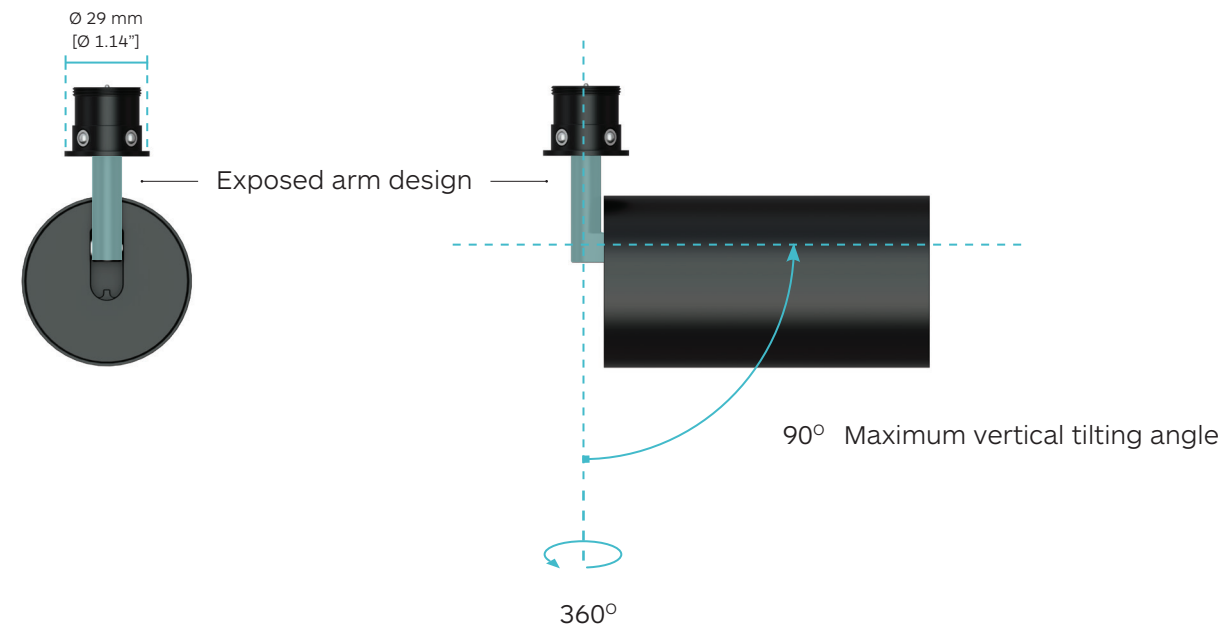

TicTok Series

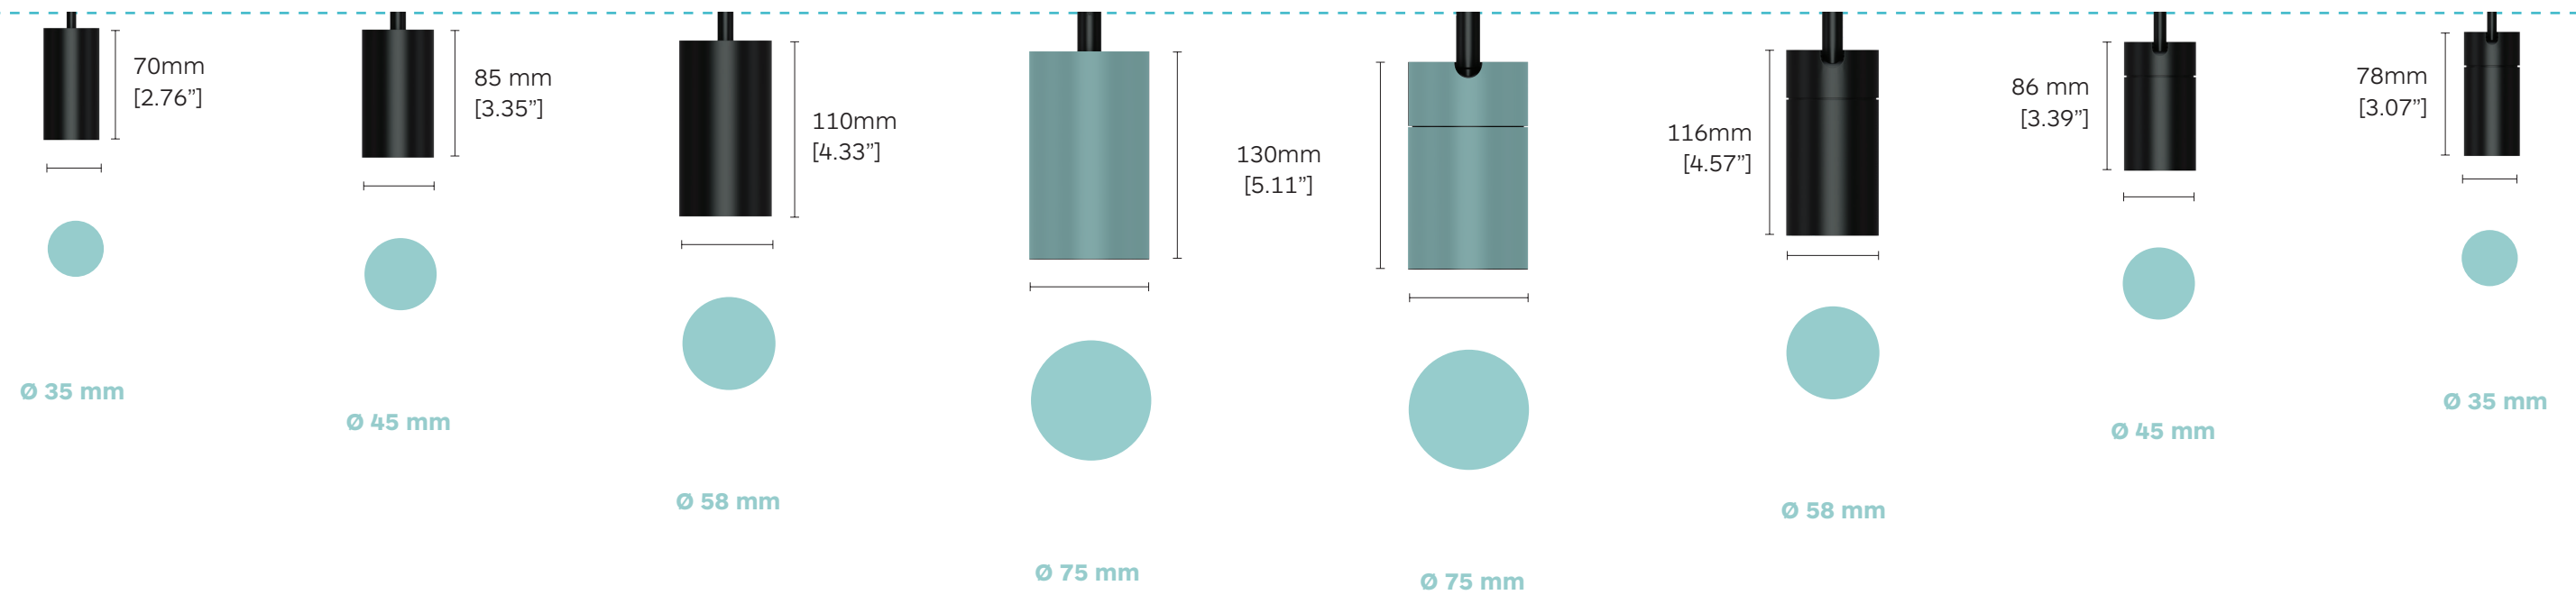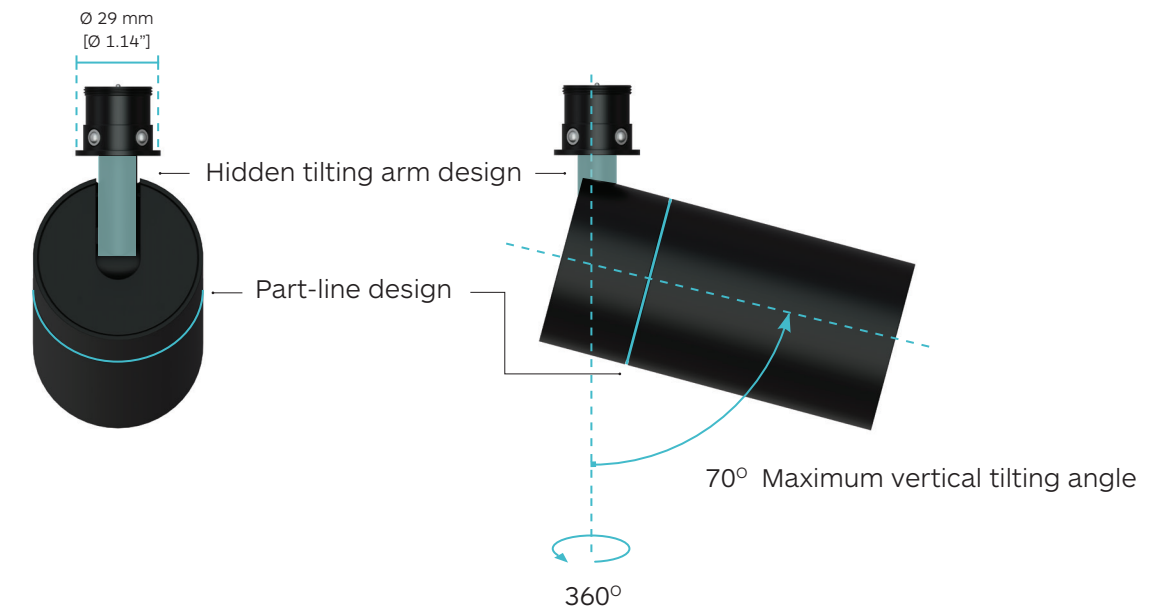

Mono Point Index

Surface
Mounting




**Mounting
Options**

Page 10 - 13



Recessed
Trimless




Recessed
Trim




Fixture Options

TicTok Series - Page 22 - 25
Viivo Series - Page 26 - 29

Trimless
(for Millwork)

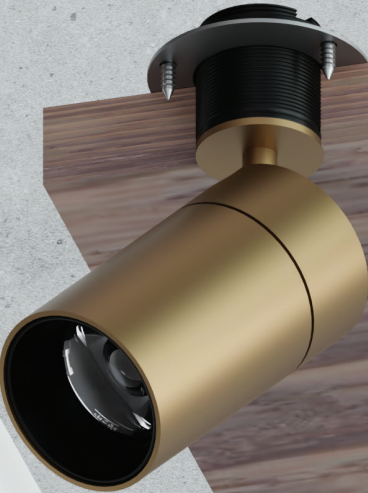

2J18
Decorative Metal Cover
(To be ordered separately)

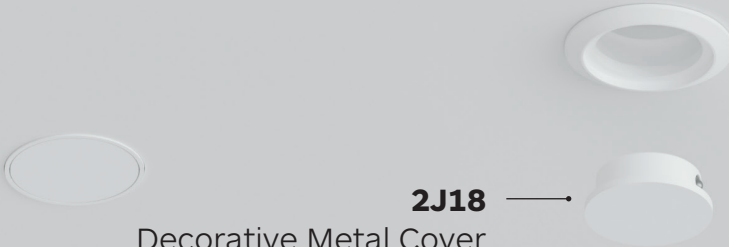

Accessories

Page 30

Mono Point Index

Fixture Options

TicTok Series - Page 22 - 25
Viivo Series - Page 26 - 29

Mounting Options

Page 10 - 13

Accessories

Page 30

Softtrack Surface mounted
with external wires



Mono Point Mounting Options

Choose your **mounting option**





Recessed
Trim

Art. 2H93 ¹



Recessed
Trimless

Art. 2H92 ¹





Trimless
(for Millwork)

Art. 2H86 ¹

Ø 30 mm
[Ø 1.18"]

Min. 10 mm, Max. 25 mm
[Min. 0.93"], [Max. 0.98"]




¹ Mounting options are ordered separately.

Mono Point Mounting Options

Surface
Mounting

Art. 2H87 ¹

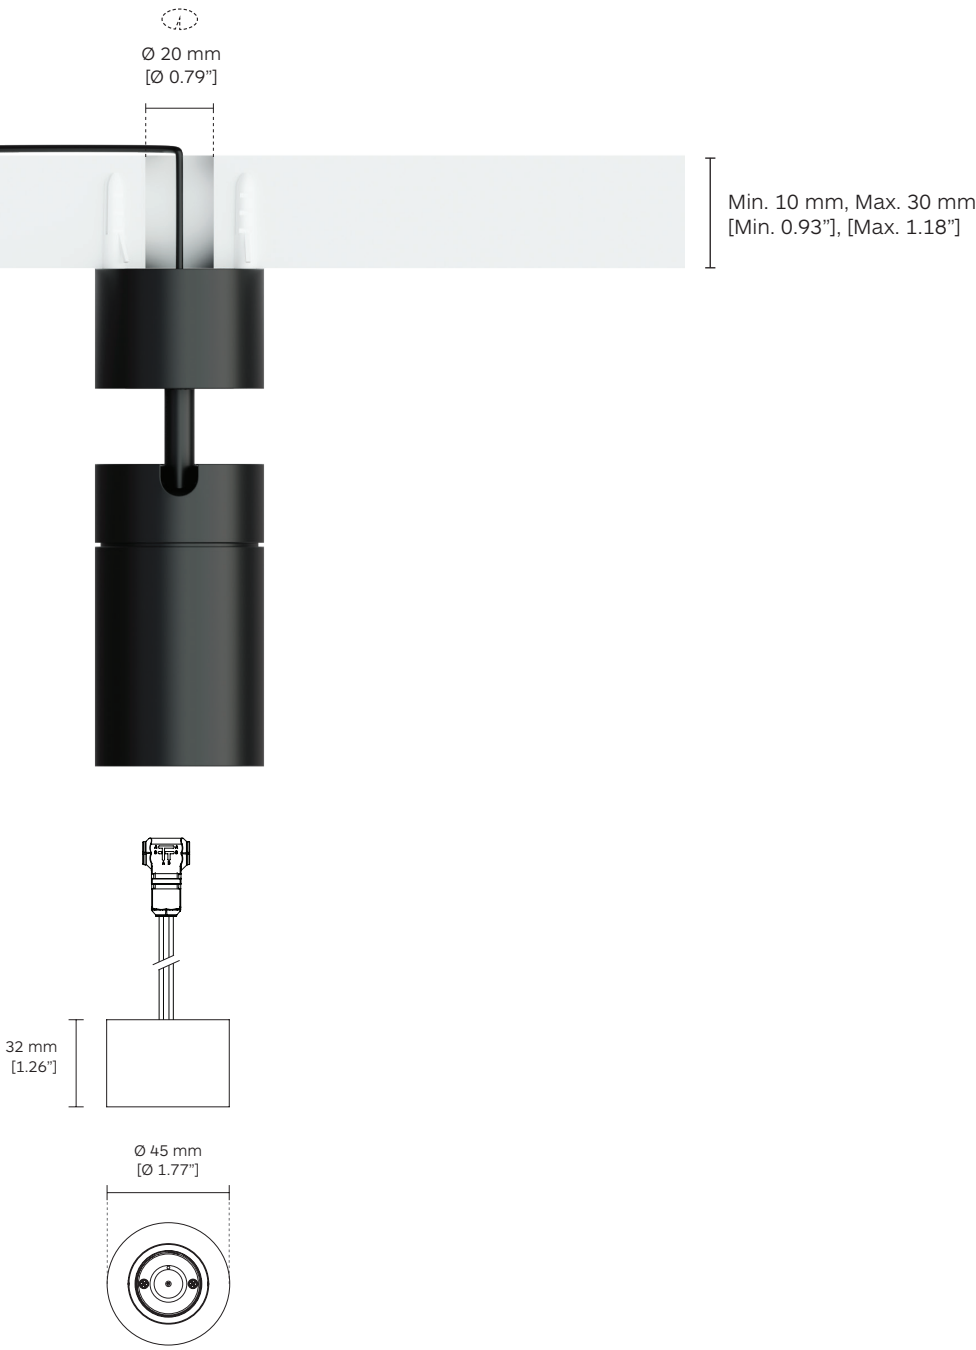

¹ Mounting options are ordered separately.




Softtrack Surface mounted
with external wires


Art. 2J16 ¹ (base mounting option for cable direction type 'L')
Art. 2J20 ¹ (base mounting option for cable direction type '45°')




TicTok & Viivo Mono Point

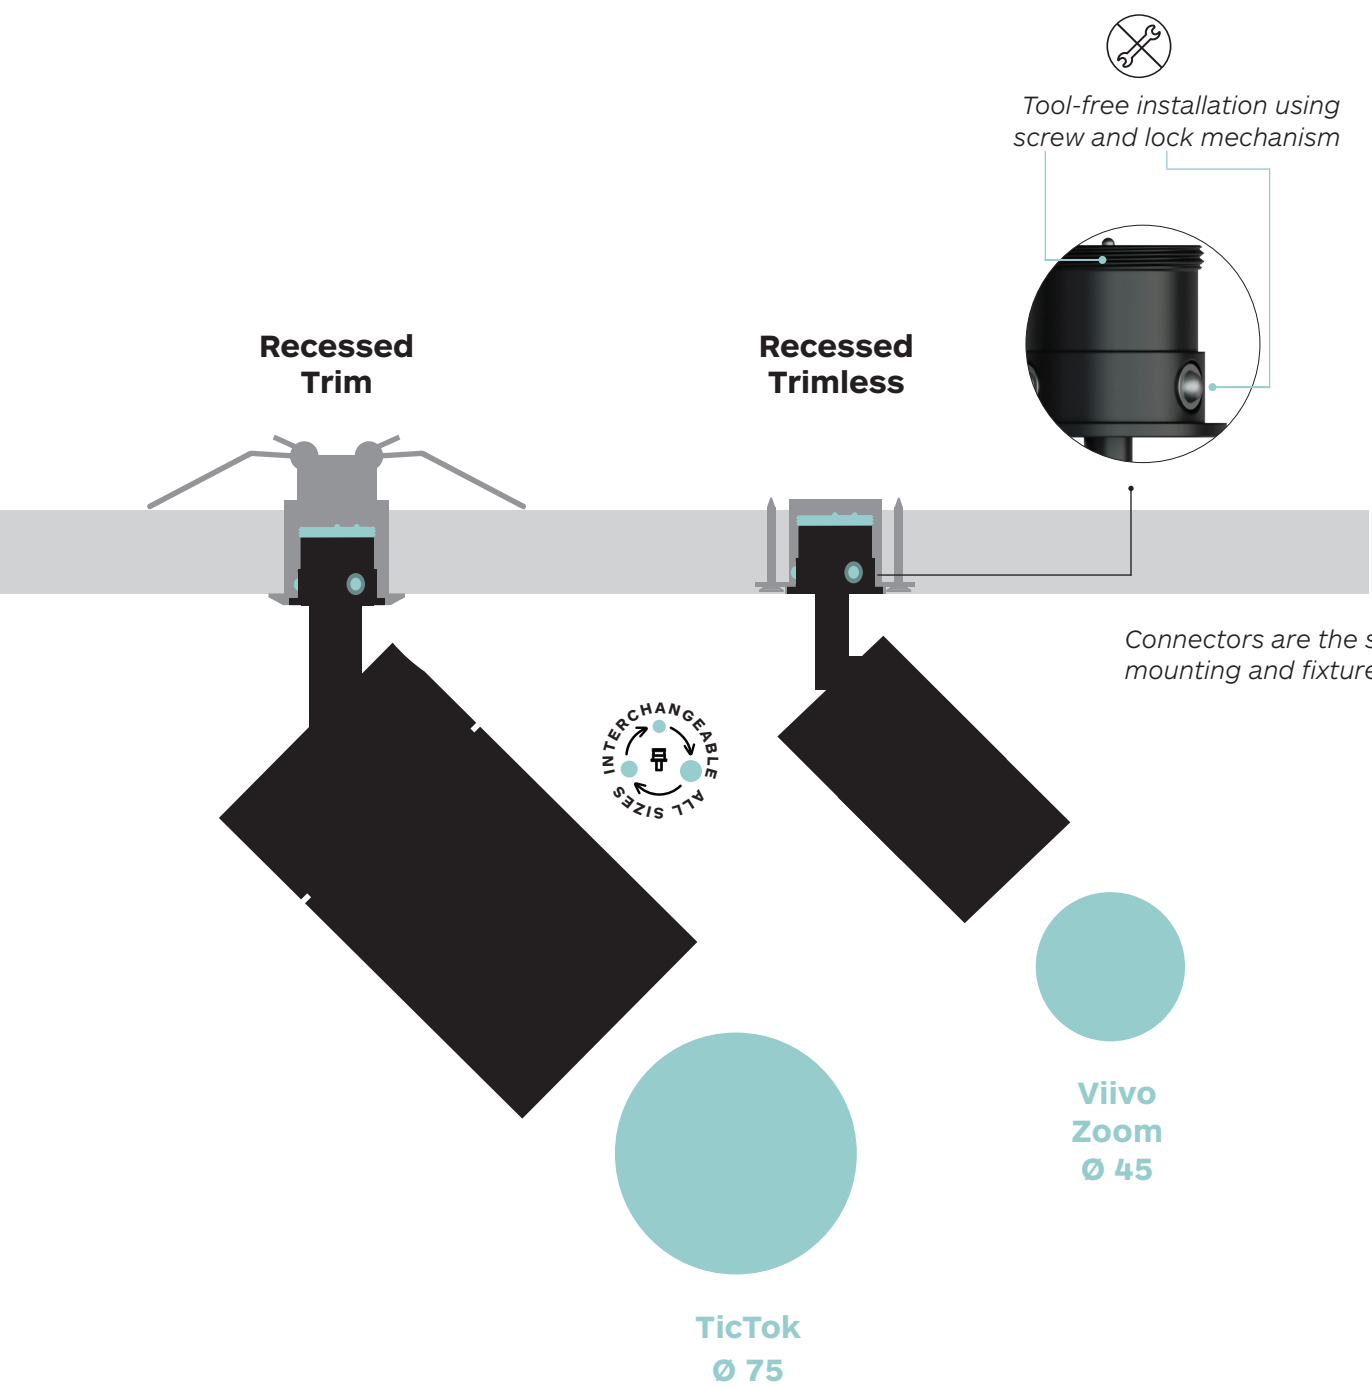

Complete compatibility and effortless tool-free installation

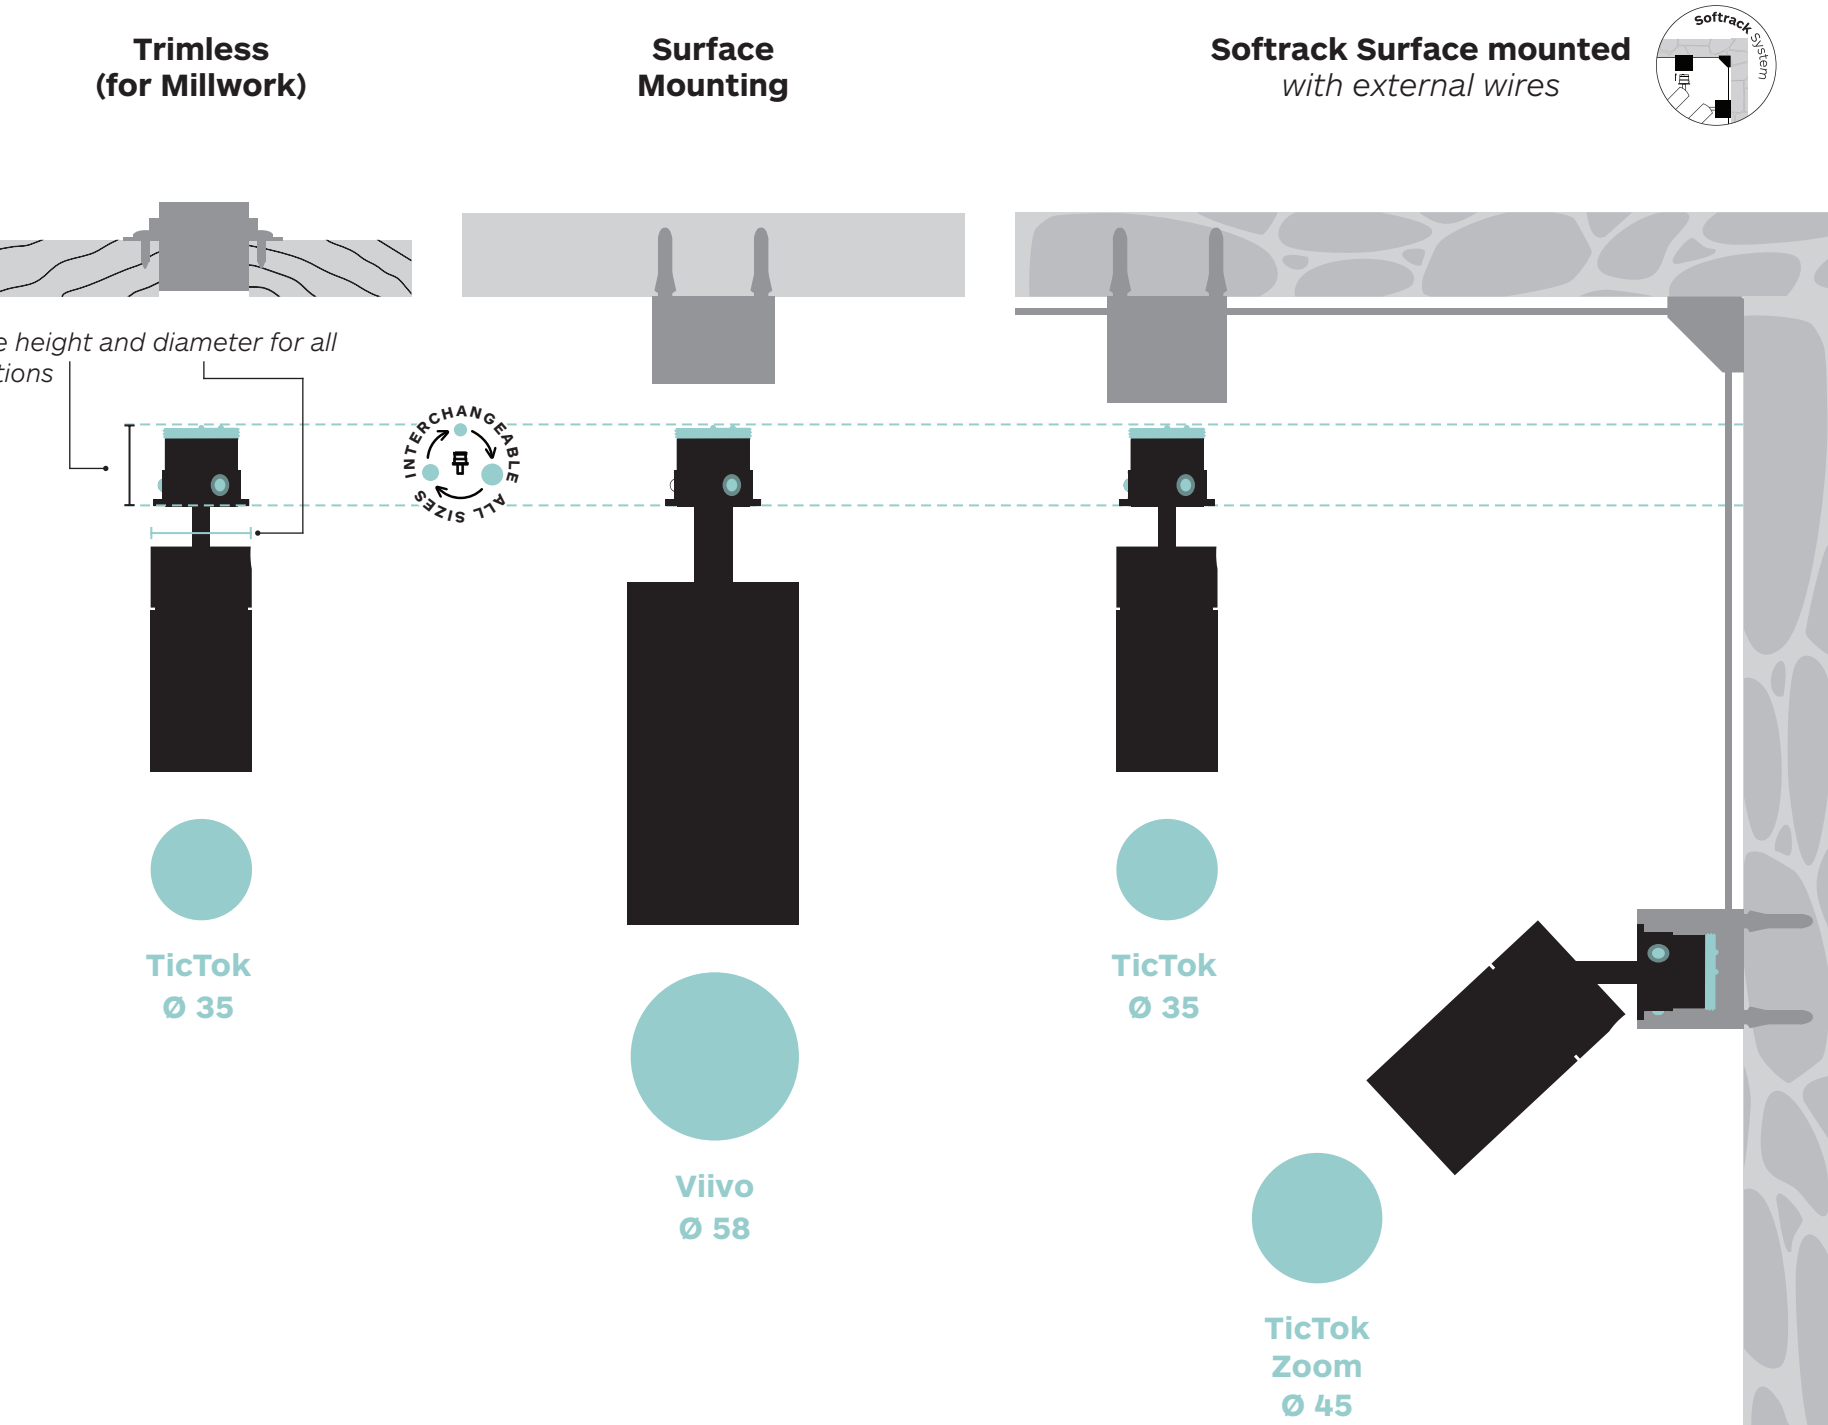



Softrack Surface mounted

with external wires

The Mono Point Softrack is a revolutionary lighting system featuring interchangeable light heads that are seamlessly integrated into concrete ceilings and walls.

There are no extra clunky power cables or clutter; the Mono Point Softrack System is streamlined and simple. The 45° and L-shape type bases allow multiple design configurations. Mono Point is ideal for any ceiling type and is compatible with a range of Viivo / TicTok spotlights Ø35, Ø45, Ø58 and Ø75 mm.

Softtrack Surface mounted *with external wires*


Art. 2J16 & 2J20

Available finishes for fixtures

65 54 1Y 1A 27 79 3G 3H 3J


Available colours for cables

Black White Red

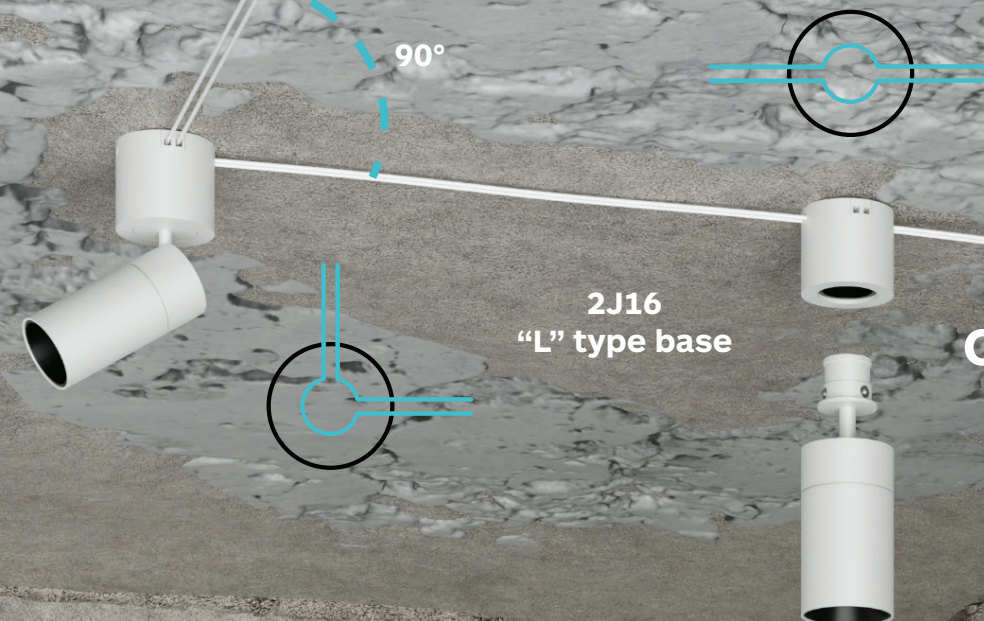


2J16
“L” type base

Corner cable
holder
Art. 2J17



Corner cable
holder installation



This application example is using 4 bases & 1 cable holder:

- “L” type base x 2
- “45°” type base x 2
- Corner cable holder x 1

Code ordering example:

2 J 1 6 + 2 J 2 0 + 2 G 6 6 + 2 J 1 7


1

2

4

3

- 4 Cable code
- 3 Corner cable holder code
- 2 Base mounting code for “45°” type
- 1 Base mounting code for “L” type

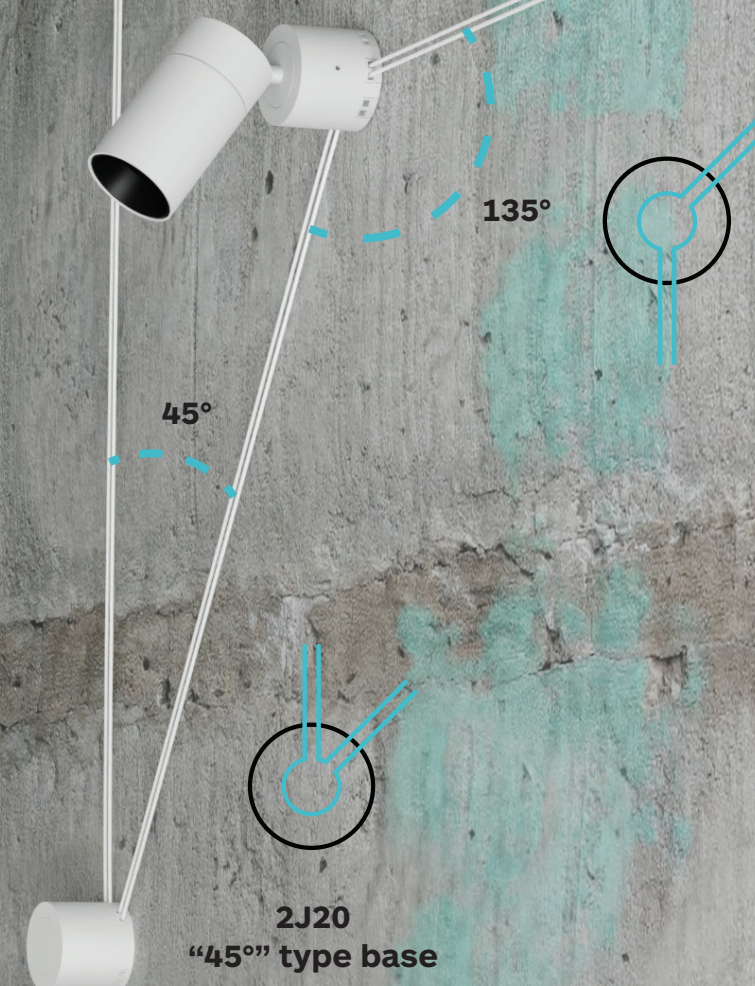

2J20
“45°” type base

Mix & Match



 Fixture Finish: **Chrome Polished** +  Cable Colour: **Red**

TicTok & Vivo Mono Point Series



 Fixture Finish: **Antique Brass** +  Cable Colour: **Black**

Fixture Finish

- | | |
|---|---|
|  Embossed Matt Black |  Brushed Aluminium |
|  Embossed Matt White |  Brushed Brass |
|  Embossed Matt Total White |  Antique Brass |
|  Chrome Gold |  Blackened Brass |
|  Chrome Polished | |

Cable Colour

- | |
|---|
|  Red |
|  White |
|  Black |

Different fixture finishes and cable colours are available on request.

TicTok Mono Point

35 | 45 | 58 | 75 | Zoom 45, 58 & 75



The TicTok Mono Point is a revolutionary lighting system featuring interchangeable components that are seamlessly integrated into the ceiling with a minimalist design.

Choose from recessed trim, trimless, and surface mount. Mono Point is ideal for any ceiling type and is compatible with a range of TicTok spotlights Ø35mm, Ø45mm, Ø58mm and Ø75mm. Each light head tilts up to 70° and rotates 360° horizontally.

Mix and match to create your custom arrangement; whether mounted on the wall or ceiling, it adds a dramatic and refined touch to any space.

- 65 - Embossed Matt Black
- 54 - Embossed Matt White
- 1Y - Embossed Matt Total White
- 27 - Chrome Polished



LED Sources:

High Efficacy:
CRI: 90 & 93 | CCT: 2700K, 3000K, 3500K, 4000K.

High Rendering:
CRI: 97 & 98 | CCT: 2700K, 3000K, 3500K, 4000K.

Accessories:


- Wide & Dense Texture Honeycomb Louvre
 - Elliptical Beam Diffuser
 - Coloured Glasses Diffuser
 - Opal Diffuser
 - Spread Lens
 - Cross blade Louvre
 - Barn doors
 - Wallwasher Cone 45°
- Please see page 30 for details.

TicTok Mono Point


35 | 45 | 58 | 75 | Zoom 45, 58 & 75




9298




Ø 29 mm
[Ø 1.14"]



9296 / 9297




Ø 29 mm
[Ø 1.14"]




Zoom Spot 15° - 47°

9294 / 9295




Ø 29 mm
[Ø 1.14"]




Zoom Spot 17° - 34°

92B6 / 92B7



Ø 29 mm
[Ø 1.14"]



Zoom Spot 12° - 28°

		Fixture Code ¹	LED Module Code	LED Power	Nominal Lumen	Beam Angle (BA°)	Dimming Options ³	CCT Options ²
CRI>90 3000K High Efficacy	TicTok 35	9298	E013	5W	691 lm	20° / 24° / 38°	D0 No Dim	27 2700K
	TicTok 45	9296	JC02	10W	969 lm	12°	DA DALI Dim	30 3000K
				9W	1101 lm	18° / 26° / 38°	DC CASAMBI	35 3500K
	TicTok Zoom 45	9297	E077	5.5W	634 lm	BS (15°- 47°)	D1 0-10V Dim	40 4000K
	TicTok 58	9294	JC01	15W	1632 lm	12° / 18°		
				14W	1730 lm	24° / 34°		
	TicTok Zoom 58	9295	E030	15W	1632 lm	BS (17°- 34°)		
	TicTok Zoom 75	92B7	E035	19W	1937 lm	BS (12° - 28°)		
CRI>93 3000K High Efficacy	TicTok 75	92B6	E029	18W	2305 lm	12° / 26° / 36°		
CRI>97 3000K High Rendering	TicTok 35	9298	E013	5W	620 lm	20° / 24° / 38°		
	TicTok 45	9296	JC02	10W	922 lm	12°		
				9W	975 lm	18° / 26° / 38°		
	TicTok Zoom 45	9297	E077	5.5W	606 lm	BS (15°- 47°)		
	TicTok 58	9294	JC01	15W	1418 lm	12° / 18°		
				14W	1590 lm	24° / 34°		
	TicTok Zoom 58	9295	E030	15W	1418 lm	BS (17°- 34°)		
	TicTok Zoom 75	92B7	E035	19W	1651 lm	BS (12° - 28°)		
CRI>98 3000K High Rendering	TicTok 75	92B6	E006	18W	1765 lm	14° / 26° / 37°		

¹ For complete code ordering information, please see page 42. ² Other CCT options available on request.
³ 0-10V / DALI dimming options are available as group dimming. Please see pages 32 - 33 for more details.
48V Power Supply to be ordered separately, please see page 33 for more details.
For the most updated product information, please go to our website.

BS = Beam Shaping. Ordering code; BS.

Viivo Mono Point

35 | 45 | 58 | 75 | Zoom 45, 58 & 75

The Viivo Mono Point is a revolutionary lighting system featuring interchangeable components that are seamlessly integrated into the ceiling with a minimalist design.

Choose from recessed trim, trimless, and surface mount. Mono Point is ideal for any ceiling type and is compatible with a range of Viivo spotlights Ø35mm, Ø45mm, Ø58mm and Ø75mm. Each light head tilts up to 90° and rotates 360° horizontally.

Mix and match to create your custom arrangement; whether mounted on the wall or ceiling, it adds a dramatic and refined touch to any space.



LED Sources:



High Efficacy:
CRI: 90 & 93 | CCT: 2700K, 3000K, 3500K, 4000K.

High Rendering:
CRI: 97 & 98 | CCT: 2700K, 3000K, 3500K, 4000K.

- 65 - Embossed Matt Black
- 54 - Embossed Matt White
- 1Y - Embossed Matt Total White
- 1A - Chrome Gold
- 27 - Chrome Polished
- 79 - Brushed Aluminium
- 3G - Brushed Brass
- 3H - Antique Brass
- 3J - Blackened Brass


Accessories:

- Wide & Dense Texture Honeycomb Louvre
 - Elliptical Beam Diffuser
 - Coloured Glasses Diffuser
 - Opal Diffuser
 - Spread Lens
 - Cross blade Louvre
 - Barn doors
 - Wallwasher Cone 45°
- Please see page 30 for details.

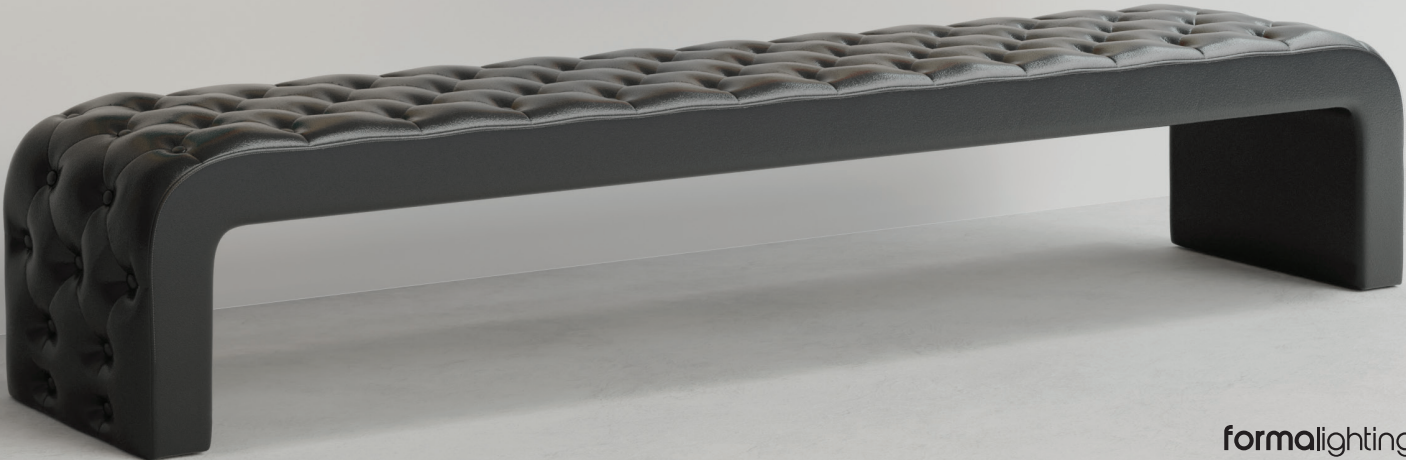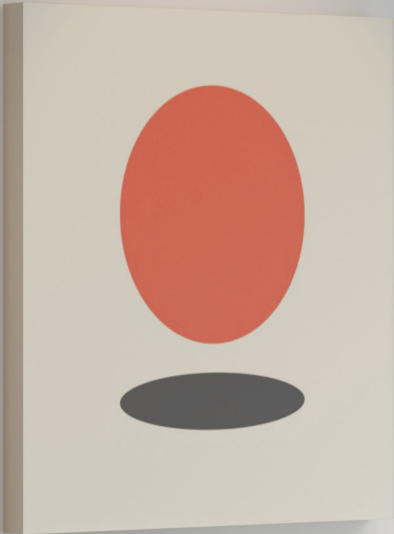

Viivo Mono Point

35 | 45 | 58 | 75 | Zoom 45, 58 & 75


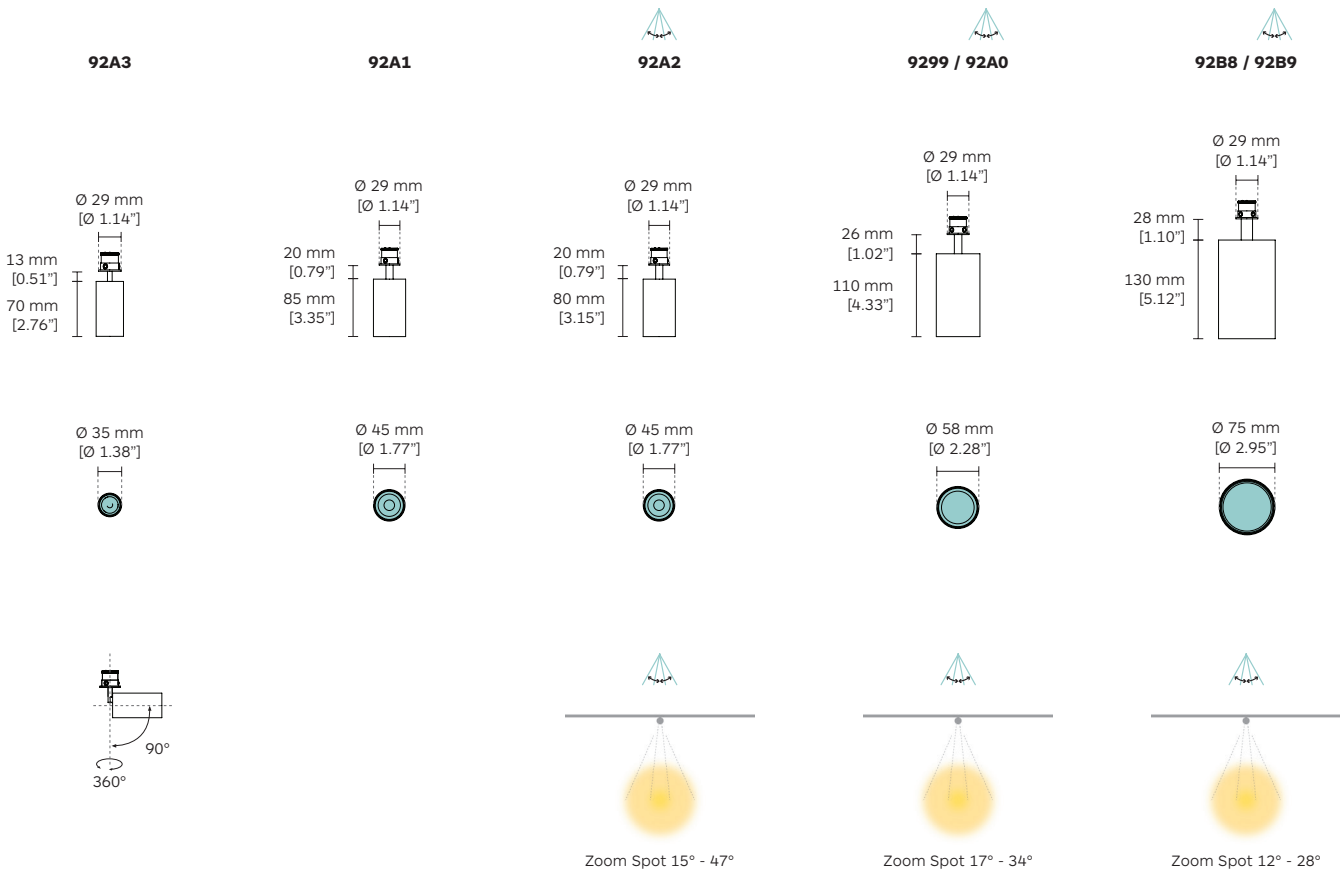


		Fixture Code ¹	LED Module Code	LED Power	Nominal Lumen	Beam Angle (BA°)	Dimming Options ³	CCT Options ²
CRI>90 3000K	High Efficacy	Viivo 35	92A3	E013	5W	691 lm	D0 No Dim DA DALI Dim DC CASAMBI D1 0-10V Dim	27 2700K 30 3000K 35 3500K 40 4000K
		Viivo 45	92A1	JC02	10W	969 lm		
				9W	1101 lm	18° / 26° / 38°		
		Viivo Zoom 45	92A2	E077	5.5W	634 lm		
		Viivo 58	9299	JC01	15W	1632 lm		
	High Efficacy			14W	1730 lm	12° / 18° 24° / 34°		
		Viivo Zoom 58	92A0	E030	15W	1632 lm		
		Viivo Zoom 75	92B9	E035	19W	1937 lm		
						BS (15° - 47°)		
		Viivo 75	92B8	E029	18W	2305 lm		
CRI>93 3000K	High Efficacy	Viivo 35	92A3	E013	5W	620 lm	D0 No Dim DA DALI Dim DC CASAMBI D1 0-10V Dim	27 2700K 30 3000K 35 3500K 40 4000K
		Viivo 45	92A1	JC02	10W	922 lm		
				9W	975 lm	18° / 26° / 38°		
		Viivo Zoom 45	92A2	E077	5.5W	606 lm		
		Viivo 58	9299	JC01	15W	1418 lm		
	High Efficacy			14W	1590 lm	12° / 18° 24° / 34°		
		Viivo Zoom 58	92A0	E030	15W	1418 lm		
		Viivo Zoom 75	92B9	E035	19W	1651 lm		
						BS (17° - 34°)		
		Viivo 75	92B8	E006	18W	1765 lm		
CRI>97 3000K	High Rendering	Viivo 35	92A3	E013	5W	620 lm	D0 No Dim DA DALI Dim DC CASAMBI D1 0-10V Dim	27 2700K 30 3000K 35 3500K 40 4000K
		Viivo 45	92A1	JC02	10W	922 lm		
				9W	975 lm	18° / 26° / 38°		
		Viivo Zoom 45	92A2	E077	5.5W	606 lm		
		Viivo 58	9299	JC01	15W	1418 lm		
	High Rendering			14W	1590 lm	12° / 18° 24° / 34°		
		Viivo Zoom 58	92A0	E030	15W	1418 lm		
		Viivo Zoom 75	92B9	E035	19W	1651 lm		
						BS (17° - 34°)		
		Viivo 75	92B8	E006	18W	1765 lm		
CRI>98 3000K	High Rendering	Viivo 35	92A3	E013	5W	620 lm	D0 No Dim DA DALI Dim DC CASAMBI D1 0-10V Dim	27 2700K 30 3000K 35 3500K 40 4000K
		Viivo 45	92A1	JC02	10W	922 lm		
				9W	975 lm	18° / 26° / 38°		
		Viivo Zoom 45	92A2	E077	5.5W	606 lm		
		Viivo 58	9299	JC01	15W	1418 lm		
	High Rendering			14W	1590 lm	12° / 18° 24° / 34°		
		Viivo Zoom 58	92A0	E030	15W	1418 lm		
		Viivo Zoom 75	92B9	E035	19W	1651 lm		
						BS (17° - 34°)		
		Viivo 75	92B8	E006	18W	1765 lm		

¹ For complete code ordering information, please see page 42. ² Other CCT options available on request.
³ 0-10V / DALI dimming options are available as group dimming. Please see pages 32 - 33 for more details.
48V Power Supply to be ordered separately, please see page 33 for more details.
For the most updated product information, please go to our website.

BS = Beam Shaping. Ordering code; BS.

Accessories




							
Product / Accessories	Coloured Glasses Diffuser	Opal Diffuser	Spread Lens	Elliptical Beam Diffuser	Wide Texture Honeycomb Louvre	Dense Texture Honeycomb Louvre	Cross blade Louvre
	Colours 25, 42, 55, 85		Colour 41		Colour 10	Colour 10	Colours 10, 17
TicTok 35 & Viivo 35	2G58	2G60	/	2G62	2G31	2G33	/
TicTok 45 ¹ & Viivo 45 ¹	2F91	2F94	2F97	2F88	2F71	2F85	2G01
TicTok 58 ¹ & Viivo 58 ¹	2F92	2F95	2F98	2F89	2F83	2F86	2G02
TicTok 75 ¹ & Viivo 75 ¹	2F93	2F96	2F99	2F90	2F84	2F87	2G03
							
Product / Accessories	Barn Doors	Wallwasher Cone 45°	Hole Saw	Corner cable holder	Decorative Metal cover		
	Colours 10, 11	Colours 10, 17	For Mono Point Recessed mountings only	For Softrack Surface mounted with external wires only	Colours 10, 11, 65, 54, 27		
TicTok 35 & Viivo 35	/	/					
TicTok 45 ¹ & Viivo 45 ¹	2G04	2G07					
			2H95	2J17	2J18		
TicTok 58 ¹ & Viivo 58 ¹	2G05	2G08					
TicTok 75 ¹ & Viivo 75 ¹	2G06	2G09					

Notes:


¹ No optical accessories are available for TicTok & Viivo 45, 58 & 75 Zoom series.

Driver Options & Wiring Diagram

Driver Options

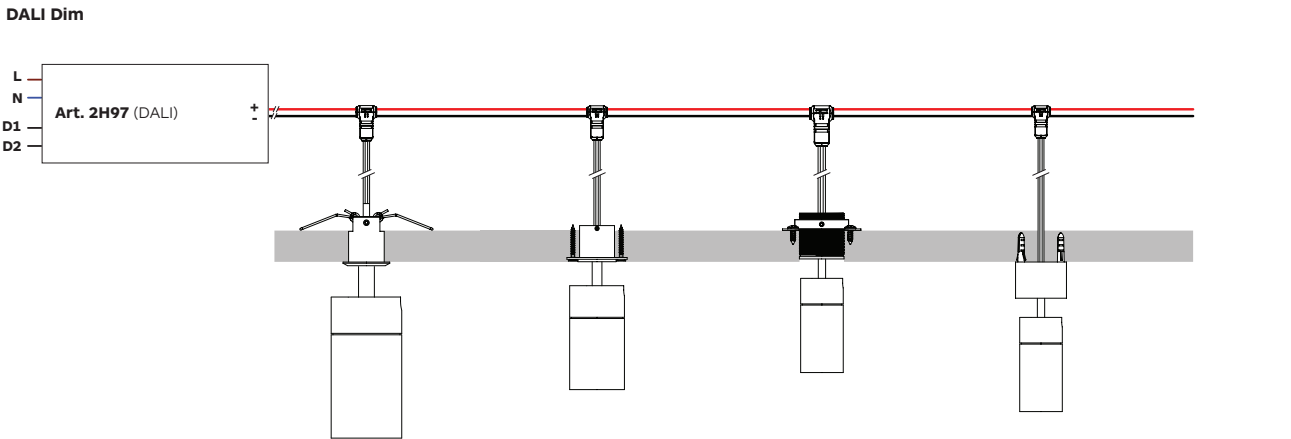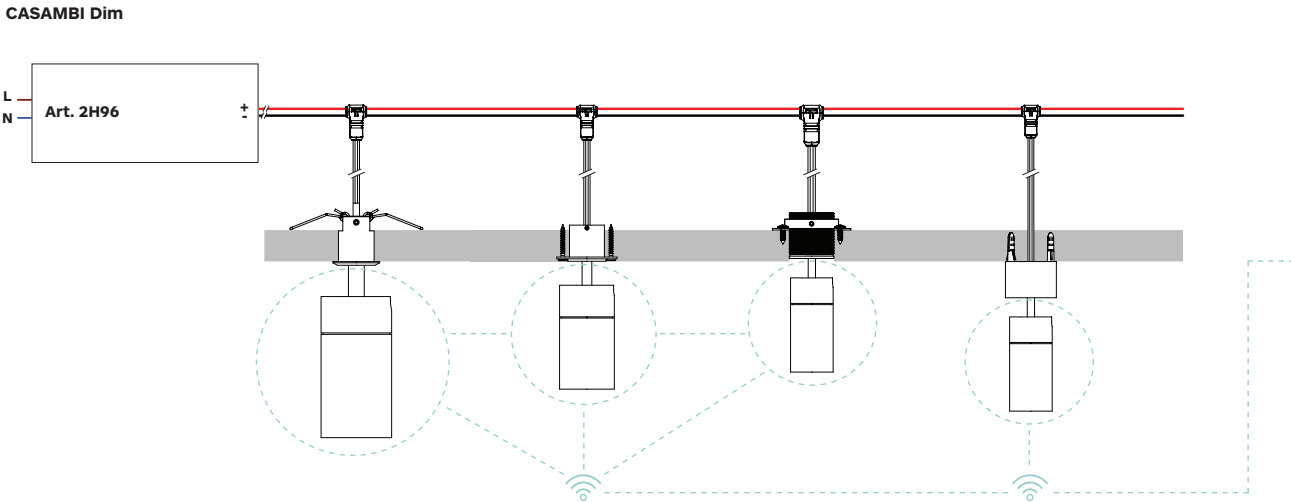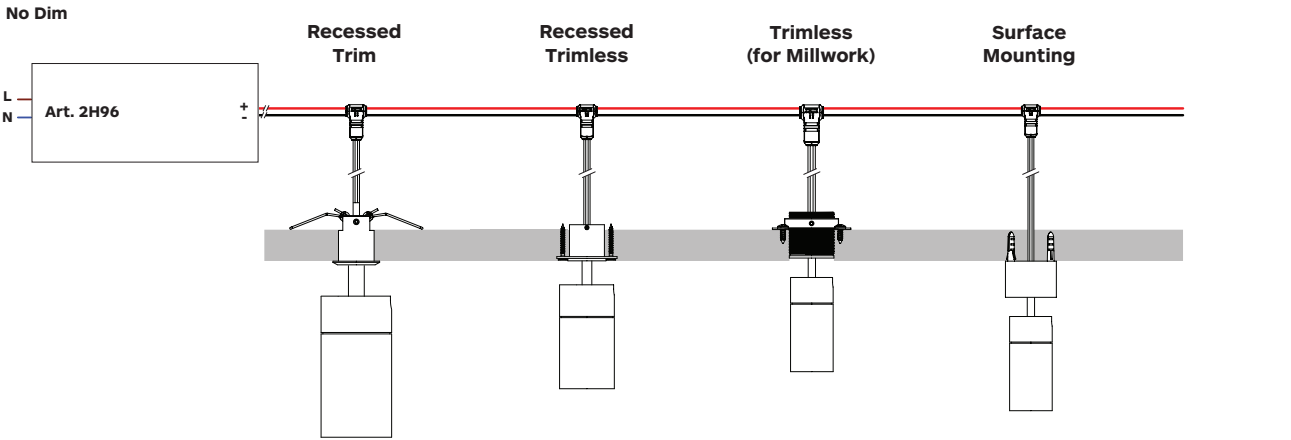

DALI dimming option is available as group dimming.

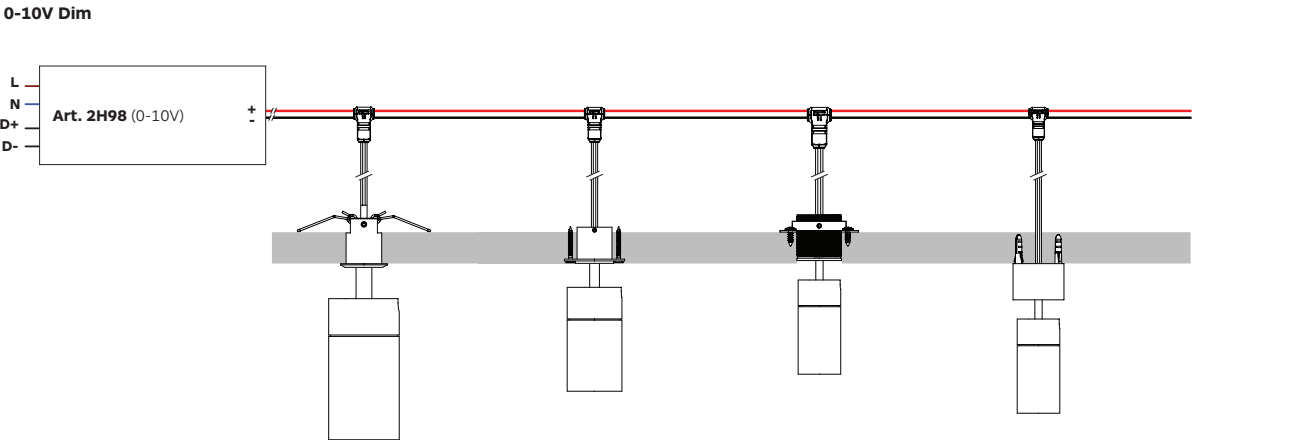



0-10V dimming option is available as group dimming.

Power Supply


	H: 30 mm [1.18"]		
	W: 43 mm [1.69"]		
	L: 325 mm [12.8"]		
220-240VAC input, 48VDC output 200w power supply 220-240VAC input, 48VDC output 200w power supply DALI Dimming 220-240VAC input, 48VDC output 200w power supply 0-10V Dimming			
Code	2H96	2H97	2H98
Size	43 x 325 x 30 mm [1.69" x 12.8" x 1.18"]	43 x 325 x 30 mm [1.69" x 12.8" x 1.18"]	43 x 325 x 30 mm [1.69" x 12.8" x 1.18"]

48V Power Supply to be ordered separately.

Installation Guideline for Softrack Surface mounted *with external wires*



Connection to power supply 48VDC (2H96), 200W Max.

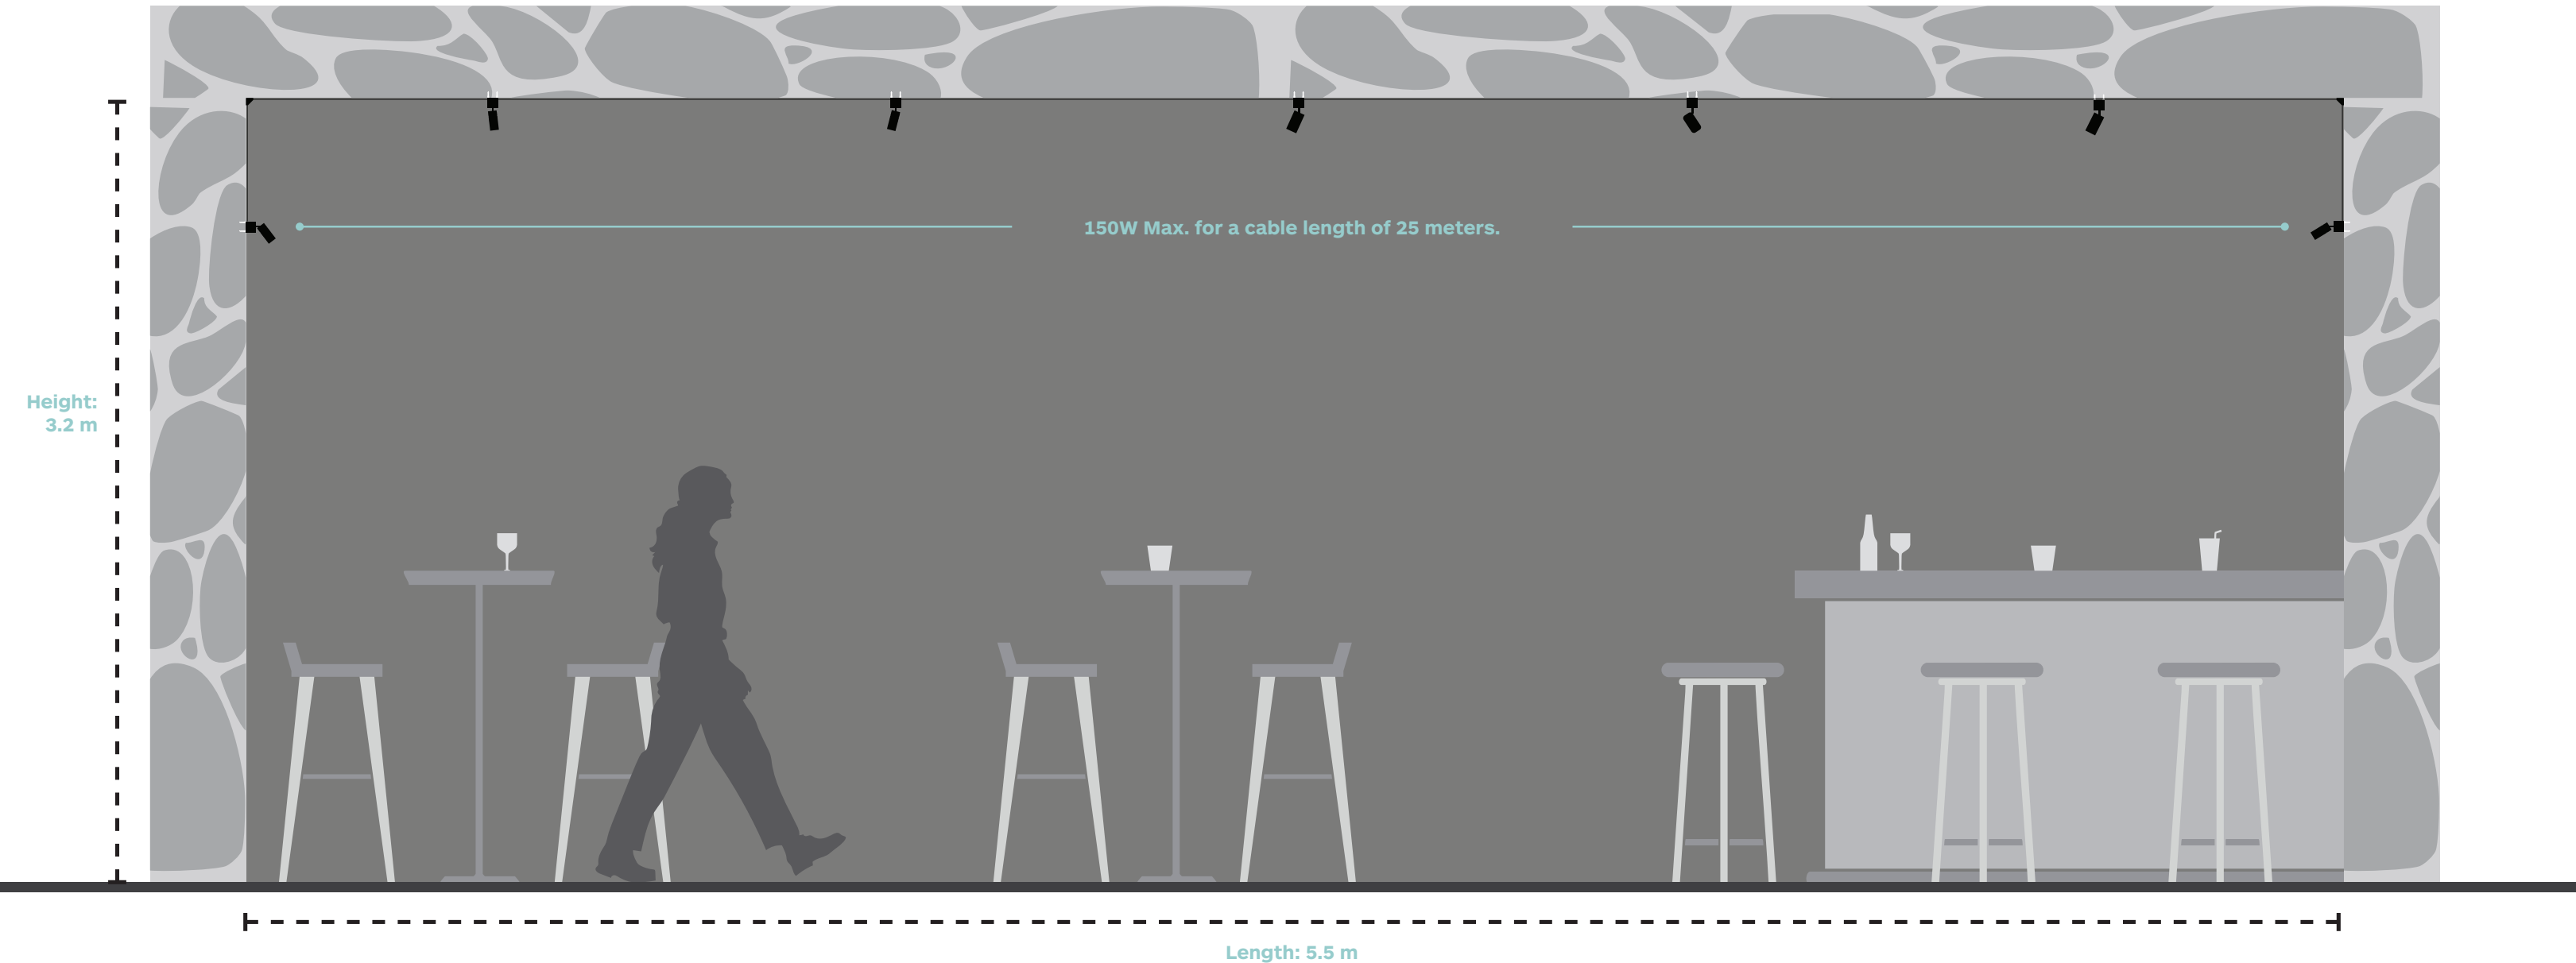

LED Modules & Lens compatibility

LED Modules & Lens compatibility

TicTok x Viivo Mono Point

Product compatibility	LED Module	CRI	LED Power	LENS Compatibility Code						
TicTok & Viivo 35 Mono Point Code: 9298 92A3	E013	CRI> 90	5W	20°	24°	38°				
		CRI> 97	5W	L024	L025	L026				
TicTok & Viivo 45 Mono Point Code: 9296 92A1	JC02	CRI> 90	9W	/	L043	L044	38°			
	JC02	CRI> 90	10W	L043	/	/	L045			
	JC02	CRI> 97	9W	/	L043	L044	L045			
	JC02	CRI> 97	10W	L043	/	/	L045			
TicTok & Viivo 58 Mono Point Code: 9294 9299	JC01	CRI> 90	14W	/	/	L041	34°			
	JC01	CRI> 90	15W	L040	L041	/	L042			
	JC01	CRI> 97	14W	/	/	L041	L042			
	JC01	CRI> 97	15W	L040	L041	/	L042			
TicTok & Viivo 75 Mono Point Code: 92B6 96B8	E029	CRI> 93	18W	12°	13°	14°	26°	36°	37°	
	E006	CRI> 98	18W	L008	/	/	L009	L010	/	
TicTok & Viivo 45 Zoom Mono Point Code: 9297 92A1	E077	CRI> 90	5.5W	BS (15° - 47°)						
		CRI> 97								
TicTok & Viivo 58 Zoom Mono Point Code: 9295 92A0	E030	CRI> 90	15W	BS (17° - 34°)						
		CRI> 97								
TicTok & Viivo 75 Zoom Mono Point Code: 92B7 92B9	E035	CRI> 90 CRI> 97	19W	BS (12° - 28°)						

Symbols & Icons
Code system
Global presence

Symbols & Icons

48V input Class III



CLASS II
Luminaires of insulation Class II - With safety isolation, this means the tension conduction element are protected by additional isolation.

The isolation of an earth wire it is not necessary and the connection to it is not allowed.



Zoom



CASAMBI



OnBoard Dim



Degree of Ingress Protection



Interchangeable All sizes



Softrack System



Certification Icons

CE Mark - Product complies with CE Standard.



CSA Mark - Product complies with USA & Canada Standard.



KC Mark - Product complies with Korean Standard.




Other third party product approvals
Our products include electrical and electronic components that carry other worldwide Test House approvals such as those shown:




Body Colour




1Y Embossed matt total white (RAL 9016)




54 Embossed matt white (RAL 9016)




65 Embossed matt black (RAL 9017)




27 Chrome Polished




1A Chrome Gold




79 Brushed Aluminium



3G Brushed Brass



3H Antique Brass



3J Blackened Brass

Cable Colour for Softrack Surface Mounted



10 Black



11 White



55 Red

Code system

Code ordering example: **9 2 9 6 J C 0 2 - 9 7 3 0 2 6 D 0 6 5**

1

2

3

4

5

6

7

9

8

7

6

5

4

3

2

1

2 H 8 6 - 2 G 0 4

8

9

+

9

8

7

6

5

4

3

2

1

Optical accessories

Mounting options

Body colour

Dimming options

Beam angle

CCT-LED colour temperature

LED CRI

LED Module code

Product code

LED CRI	CCT-LED Colour temperature	Dimming Options	Body Colour	Mounting options	Ø 35	Ø 45	Ø 58	Ø 75	Accessories
90 CRI > 90	27 Warm White 2700K	D0 No Dim	1Y Embossed matt total white RAL (9016)	2H87 Surface Mounting	2G33	2F85	2F86	2F87	Dense Texture Honeycomb Louvre
93 CRI > 93	30 Warm White 3000K	DA DALI Dim	54 Embossed matt white RAL (9016)	2H93 Recessed Trim	/	2G01	2G02	2G03	Cross blade Louvre
97 CRI > 97	35 Warm White 3500K	DC CASAMBI	65 Embossed matt black RAL (9017)	2H92 Recessed Trimless	/	2G04	2G05	2G06	Barn Doors
98 CRI > 98	40 Neutral White 4000K	D1 0-10V Dim	27 Chrome Polished	2H86 Trimless (for Millwork)	/	2G07	2G08	2G09	Wallwasher Cone 45°
			1A Black RAL (9004)	2J16 Softrack Surface for L Type Base	2G58	2F91	2F92	2F93	Coloured Glasses Diffuser
			79 Brushed Aluminium	2J20 Softrack Surface for 45° Type Base	2G60	2F94	2F95	2F96	Opal Diffuser
			3G Brushed Brass		/	2F97	2F98	2F99	Spread Lens
			3H Antique Brass		2G62	2F88	2F89	2F90	Elliptical Beam Diffuser
			3J Blackened Brass		2G31	2F71	2F83	2F84	Wide Texture Honeycomb Louvre
						2H95			Hole Saw
						2J17			Corner cable holder
						2J18			Decorative Metal Cover
						2G66			Cable Code

How to order



7

6

5

4

3

2

1

65

54

1Y

27

Embossed Matt Black

Embossed Matt White

Embossed Matt Total White

Chrome Polished

CRI>97
3000K
High
Rendering

TicTok 45

Fixture Code
9296

LED Module Code
JC02

LED Power
9W

Nominal Lumen
1101 lm

Beam Angle (BA°)
18°/26°/38°

Dimming Options
D0 No Dim
DA DALI Dim
DC CASAMBI
D1 0-10V Dim

CCT Options
27 2700K
30 3000K
35 3500K
40 4000K

Mounting Options
2H87 Surface Mounting
2H93 Recessed Trim
2H92 Recessed Trimless
2H86 Trimless (for Millwork)
2J16 Softrack Surface for L Type Base
2J20 Softrack Surface for 45° Type Base

Optical Accessories
2G04 Barn Doors

1

2

3

4

5

6

7

8

9

Product code

LED Module code

LED CRI

CCT-LED colour temperature

Beam angle

Dimming Options

Body colour

Mounting Options

Optical Accessories

9296

JC02

97

30

26

D0

65

2H86

2G04

Global presence

Celebrating over 50 years of vision, dedication and innovation, formalighting's versatile and high-quality product offerings extends internationally via our headquarters in Hong Kong, London, Milan and Shanghai. Our well chosen and selected partners as well as our affiliated international offices broaden our global presence further in markets such as USA, Australia, Japan, South East Asia, India and the Middle East.

Through our commitment to growth and investment within formalighting's professional team, infrastructure and product ranges, we are able to provide increasing service to our global retail and hospitality clients as well as lighting designers and specifiers strengthening our position as a leading international supplier of innovative architectural lighting solutions and systems.

With over 50 years' experience in designing and manufacturing architectural lighting, formalighting's comprehensive portfolio offers a competitive range of European designed and expertly engineered products that carry CB, CE, CCC and UL certifications.

Furthermore formalighting's latest award-winning motorized range of track, pendant, and recessed fixtures, featuring remote-controlled adjustable pan and tilt, dim, dim to warm, tuneable white and beam shaping lens, are available worldwide incorporating the latest, most advanced lighting technologies.

MILAN

EUROPE HEADQUARTERS

Tel (+39) 02 9354 0300
Fax (+39) 02 9343 5117
E- mail info-europe@formalighting.com

HONG KONG

ASIA HEADQUARTERS

Tel (+ 852) 2516 6500
Fax (+ 852) 2516 6525
E- mail info-asia@formalighting.com

NEW YORK

LOCAL SALES OFFICE

E- mail info-us@formalighting.com

SHANGHAI

LOCAL SALES OFFICE

E- mail info-china@formalighting.com

LONDON

LOCAL SALES OFFICE

E- mail info-uk@formalighting.com

AUSTRALIA

LOCAL SALES OFFICE

Tel (+61) 488 567 388
E- mail info-australia@formalighting.com

INDIA

LOCAL SALES OFFICE

Tel (+91) 9686351257
E- mail info-india@formalighting.com

formalighting is constantly developing and improving its products therefore all information, drawings illustrations, specifications, photometric values in this catalogue are indicatives and shall not form part of any commitment by our company that reserves the right to change specifications without prior notification or public announcement. Technical information on the installation-instruction has precedence over the information in the catalogue. Our general terms and conditions shall apply notwithstanding any stipulation on the contrary to all the orders and agreement with formalighting. You can obtain a copy of these conditions on demand.

Publication date: July 2026
©Copyright formalighting

With thanks to all contributors for the realization of this catalogue

Designed by formalighting's Graphic Design Department

No part of this catalogue may be copied without written authorization of formalighting

formalighting

MILAN

-

LONDON

-

USA

-

HONG KONG

-

SHANGHAI

-

INDIA