



formalighting


Micro

48V Track System

2026

Micro 48V Track System

Micro 48V Track System

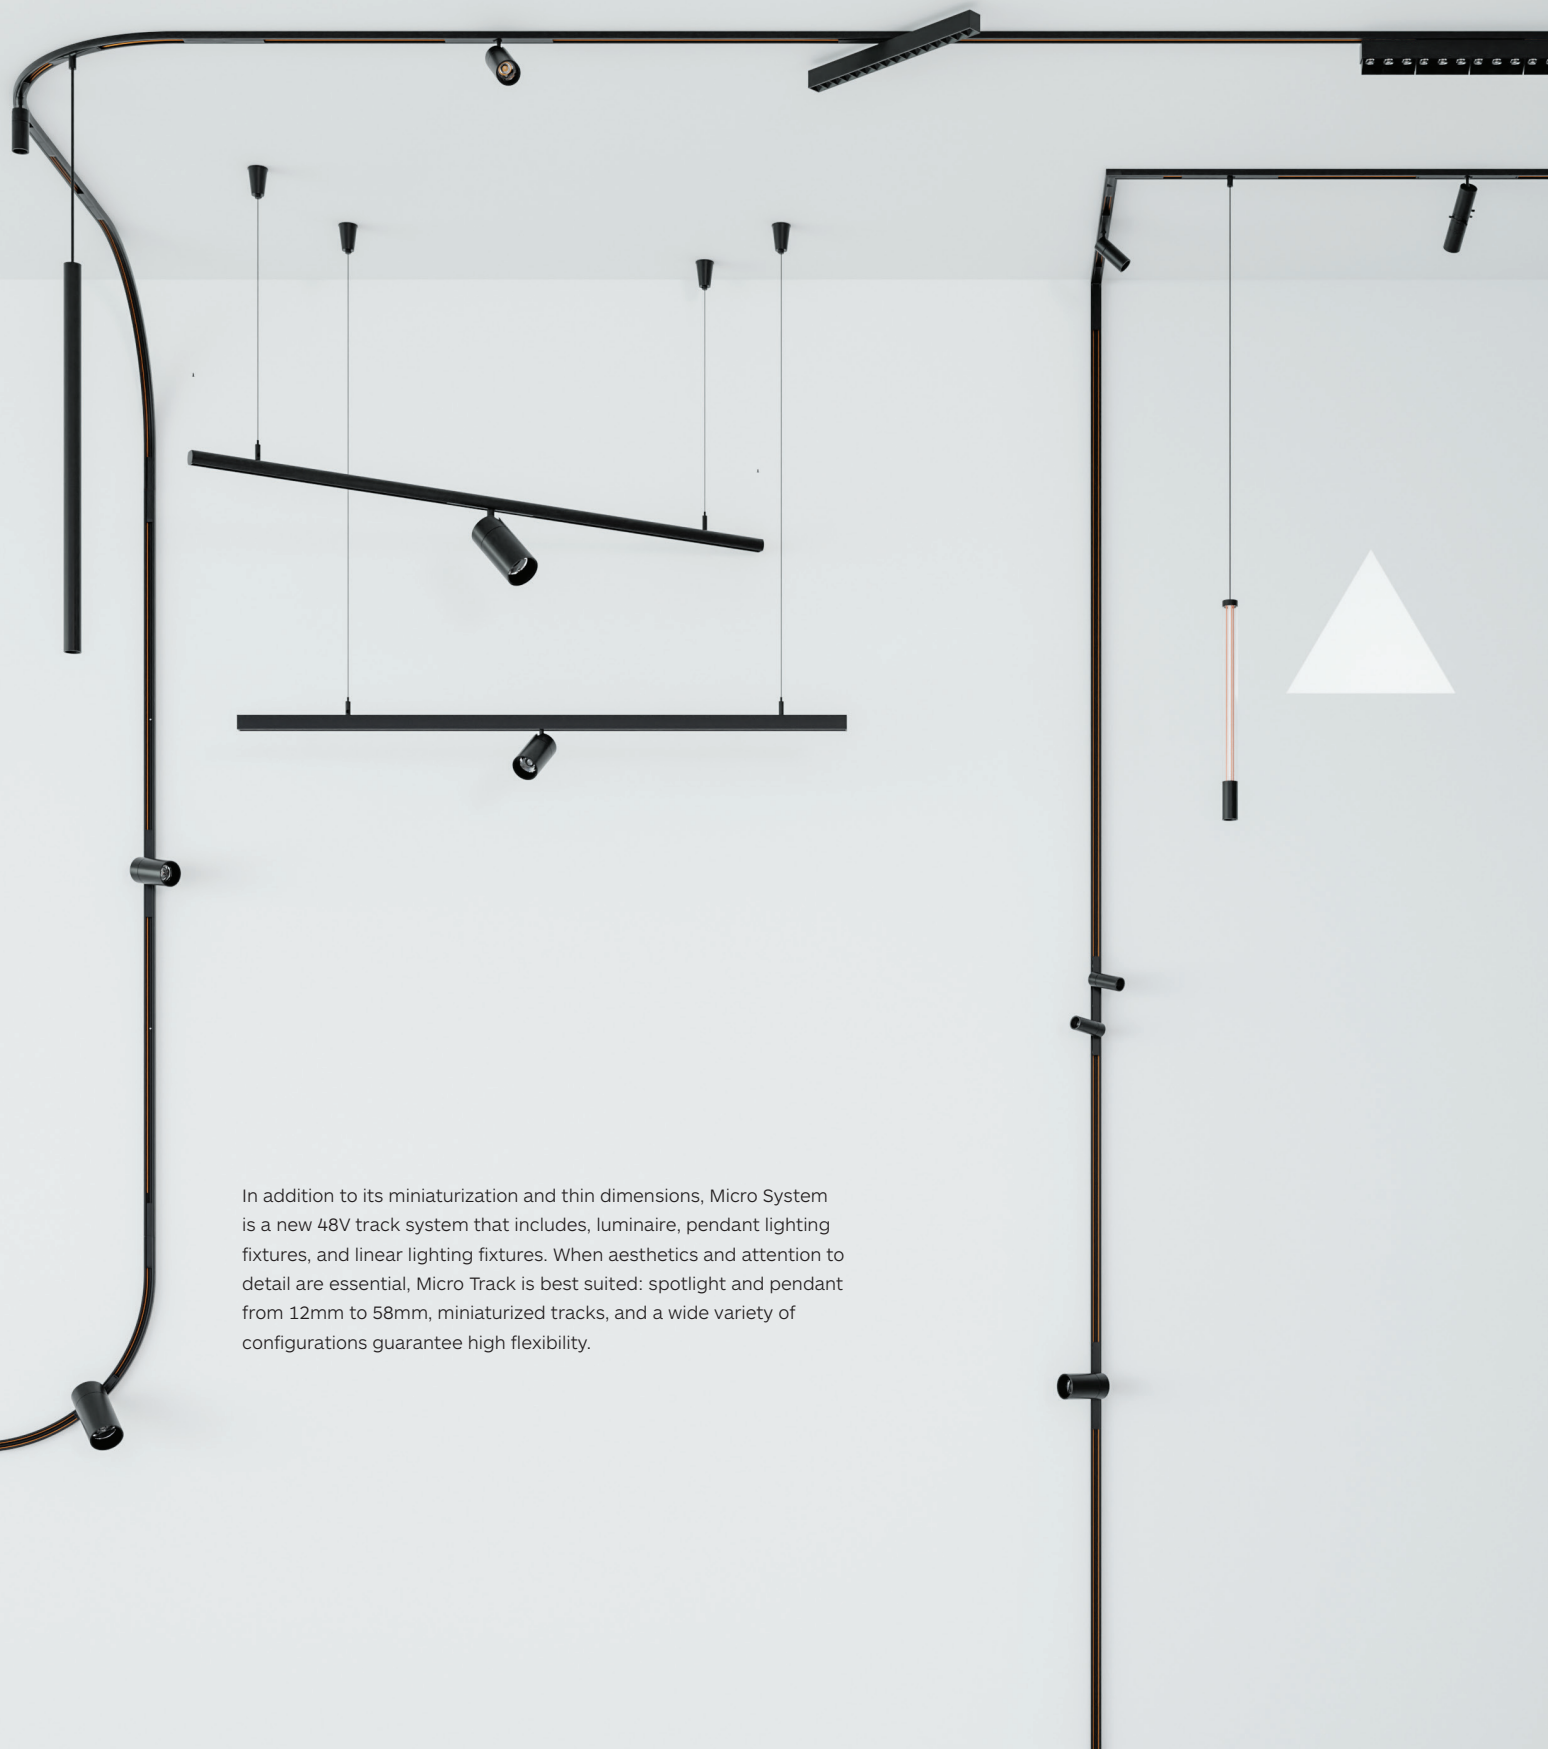

In addition to its miniaturization and thin dimensions, Micro System is a new 48V track system that includes, luminaire, pendant lighting fixtures, and linear lighting fixtures. When aesthetics and attention to detail are essential, Micro Track is best suited: spotlight and pendant from 12mm to 58mm, miniaturized tracks, and a wide variety of configurations guarantee high flexibility.





Ø 25

Viivo 25




Ø 35


Viivo 35



Ø 45

Viivo 45
Viivo 45 Zoom

Ø 58

Viivo 58
Viivo 58 Zoom

Viivo Series

Viivo 25 / 35 / 45 / 58

P.16 - 17

Viivo Twins

Viivo 25 / 35 Twins

P.14 - 15




Ø 35




Ø 25



Ø 58

TicTok 58
TicTok 58 Zoom

Ø 45

TicTok 45
TicTok 45 Zoom

Ø 35

TicTok 35



Ø 25

TicTok 25

TicTok Series

TicTok 25 / 35 / 45 / 58

P.21 - 28

TicTok Twins

TicTok 25 / 35 Twins

P.18 - 19



Ø 25




Ø 35



Zero

Zero Framing
Projector

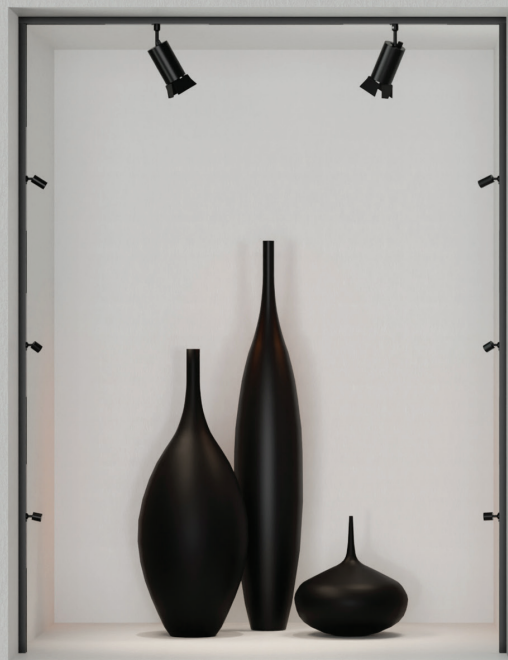

Ø 12

Zero 12

P.31


Ø 12

Zero 12 Alto

P.31

Ø 33


Zero 33



P.33

Ø 18


Zero Framing Projector 18



P.35


Ø 28

Zero Framing Projector 28

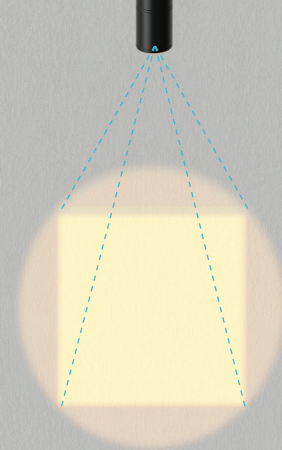

P.35

Polaris

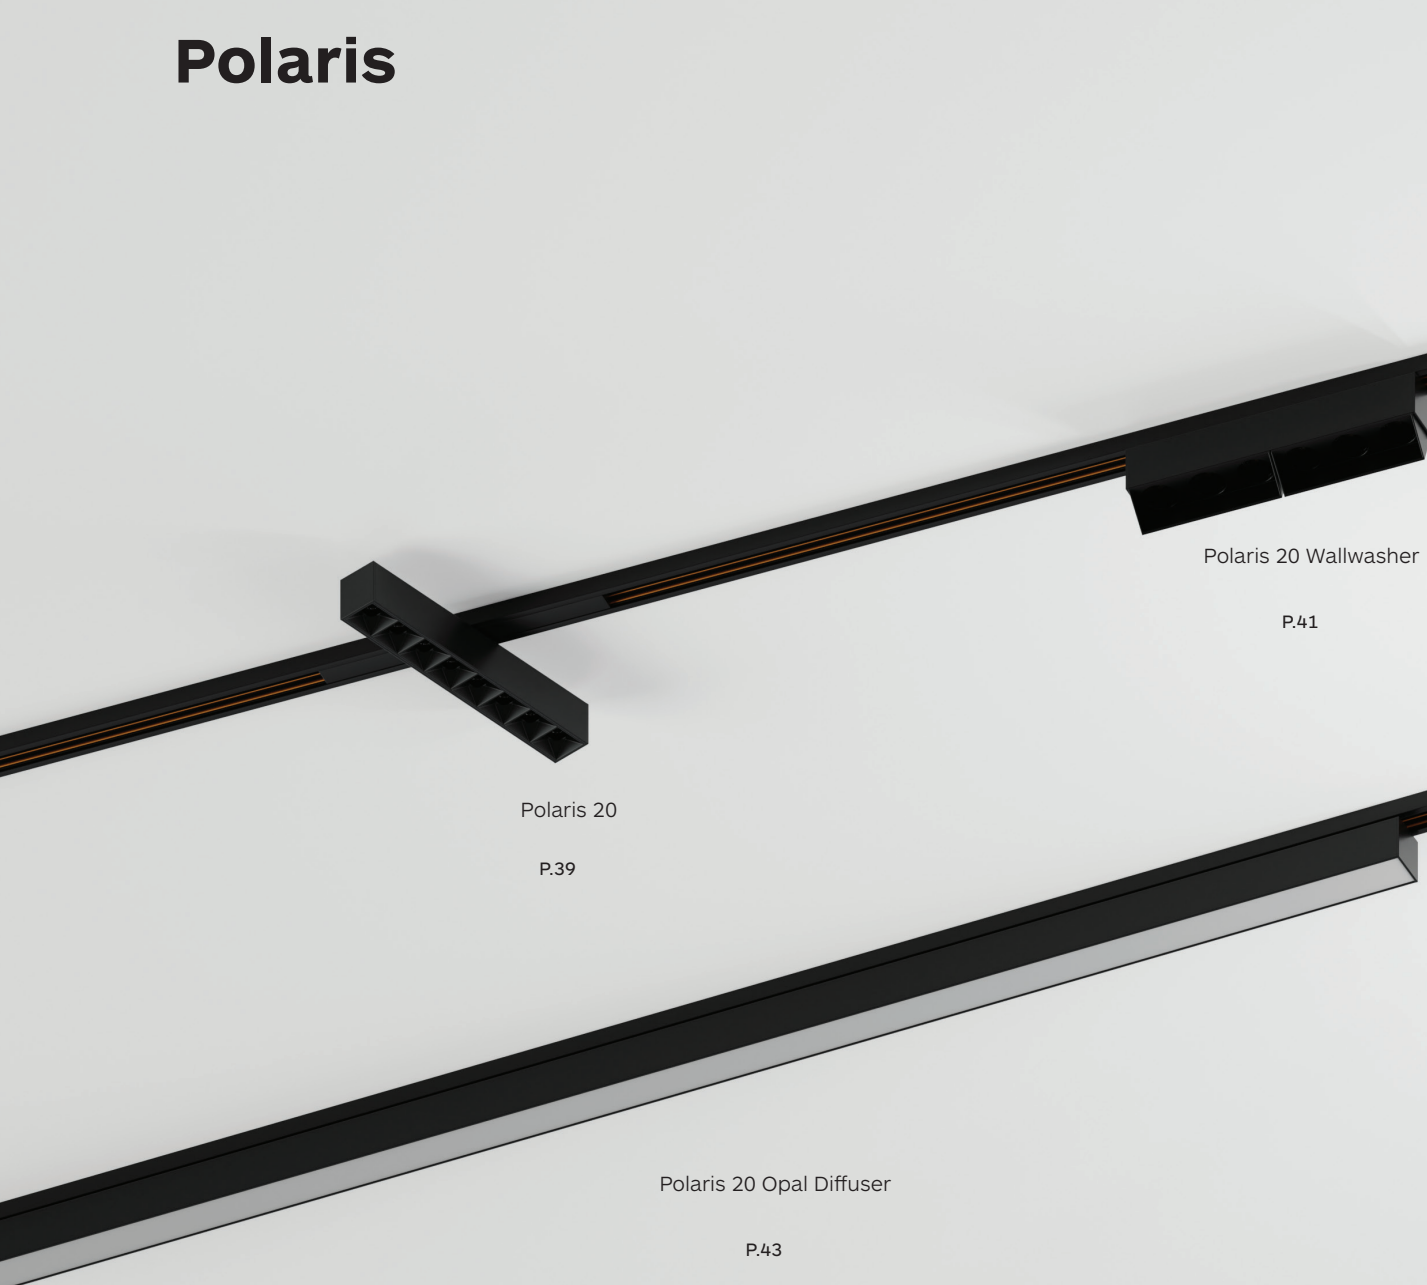

Pixxo & Pixxo Retro



Page 15

Viivo

Page 19

TicTok

Page 31

Zero

Page 35

Zero Framing Projector

Page 39

Polaris

Page 45

Pixxo Retro

Page 51

Pixxo

Micro 48V Track Options

Pages 56 - 57

Power Supply


Page 66

Mounting Accessories

Pages 64 - 65

Code Ordering System

Pages 72 - 75

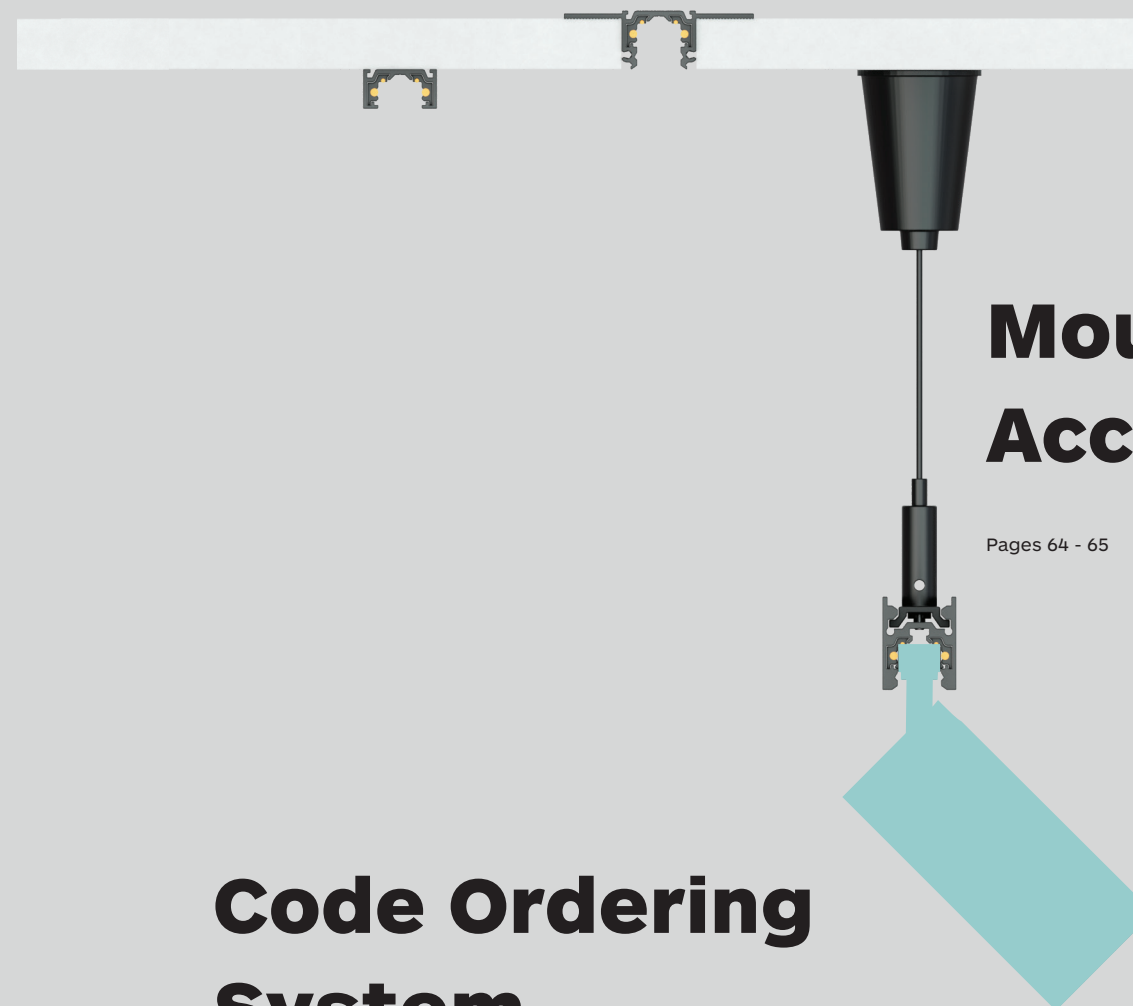

Viivo Twins

Designed by Ponctuelle Studio


Micro Track

Viivo Twins enables users to create unique lighting schemes and configurations. Tool-free interchangeable LED modules facilitate design flexibility and ease of on-site maintenance.

Available in two different adjustable light head sizes Ø25 and Ø35, with versatile aiming angle tiltable 0°-90° and rotatable 360°.

With an Embossed Matt Black/white finish, it is the perfect solution for retail, hospitality, and high-end residences. Viivo Twins is available with Casambi and DALI control options.

For complete code ordering information, please see pages 74-77.

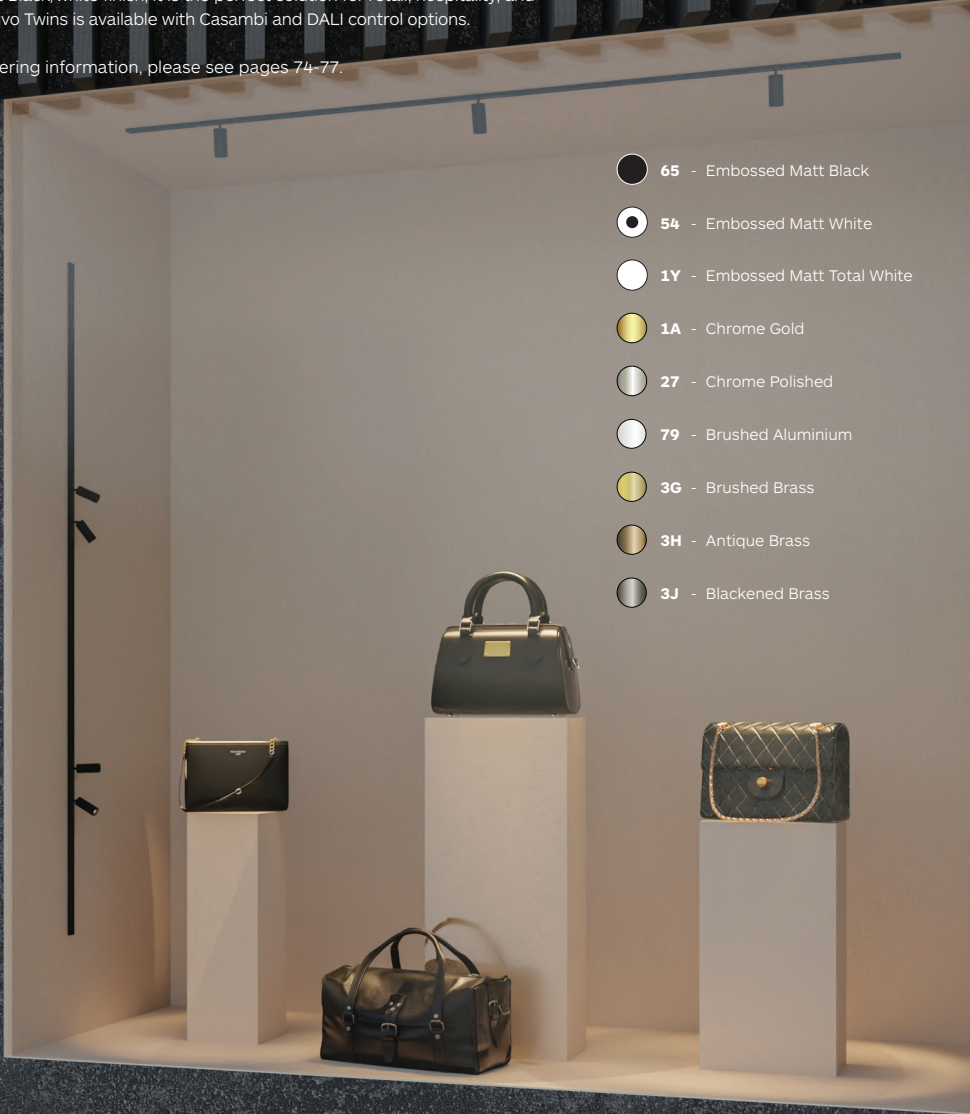

- 65 - Embossed Matt Black
- 54 - Embossed Matt White
- 1Y - Embossed Matt Total White
- 1A - Chrome Gold
- 27 - Chrome Polished
- 79 - Brushed Aluminium
- 3G - Brushed Brass
- 3H - Antique Brass
- 3J - Blackened Brass


LED Sources:

High Efficacy:
CRI: 90 | CCT: 2700K, 3000K, 3500K, 4000K.
CRI: 93 | CCT: 2700K, 3000K, 3500K, 4000K.

Accessories:

For more information about Micro 48V track system accessories see pages 68-69.

Viivo 25 & 35 Twins

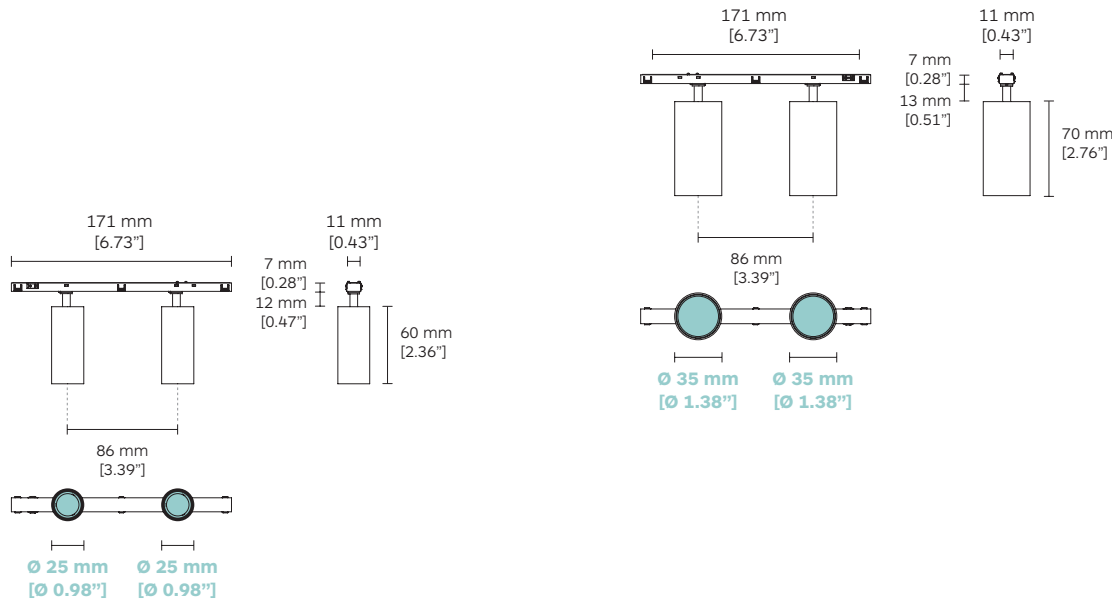

		Product Code ¹	LED Module Code	LED Power	Nominal Lumen	Beam Angle (BA°)	Dimming Options
CRI>90 3000K High Efficacy	Viivo 25 Twins	T6K6	E017	2 x 3.4W	2 x 370 lm	15° / 20° / 32°	D0 No Dim DA Dali Dim DC CASAMBI
CRI>93 3000K High Efficacy	Viivo 35 Twins	T6K7	E013	2 x 5W	2 x 691 lm	20° / 24° / 38°	CCT Options 27 2700K 30 3000K 35 3500K 40 4000K

Viivo

25 | 35 | 45 | 58
Micro 48V Track



65

54

1Y

1A

27

79

3G

3H

3J

- 65

- Embossed Matt Black
- 54

- Embossed Matt White
- 1Y

- Embossed Matt Total White
- 1A

- Chrome Gold
- 27

- Chrome Polished
- 79

- Brushed Aluminium
- 3G

- Brushed Brass
- 3H

- Antique Brass
- 3J

- Blackened Brass

The Viivo Low Voltage is an energy-saving, track-mounted low-voltage track system with an integrated driver, which focuses on modularity and eco-friendliness. The tool-free interchangeable LED module facilitates design flexibility and ease of on-site maintenance. Available in four different adjustable light head sizes Ø25, Ø35, Ø45, and Ø58mm, with versatile aiming angle tiltable 0° - 90° and rotatable 360°.

For complete code ordering information, please see pages 74-77.




LED Sources:

High Efficacy:
CRI: 90 | CCT: 2700K, 3000K, 3500K, 4000K.

High Rendering:
CRI: 97 | CCT: 2700K, 3000K, 3500K, 4000K.

Accessories:

- Wide & Dense Texture Honeycomb Louvre
 - Elliptical Beam Diffuser
 - Coloured Glasses Diffuser
 - Opal Lens
 - Spread Lens
 - Cross blade Louvre
 - Barn doors
 - Wallwasher Cone 45°
- Please see page 27 for details.

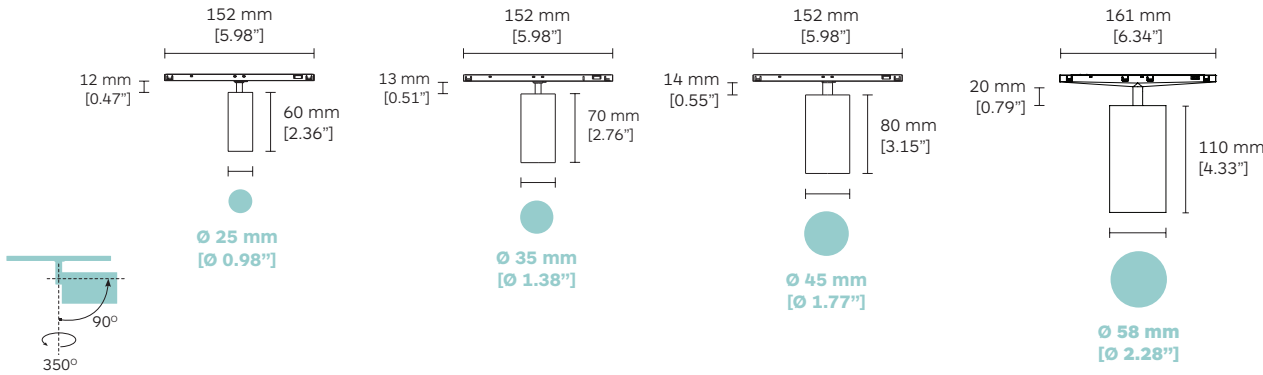

		Product Code	LED Module Code	LED Power	Nominal Lumen	Beam Angle (BA°)	Dimming Options	CCT Options
CRI>90 3000K High Efficacy	Viivo 25	T6A8	E017	3.4W	370 lm	15° / 20° / 32°	D0 No Dim	27 2700K
	Viivo 35	T6A9	E063	2.1W	195 lm	05°	DA Dali Dim	30 3000K
	Viivo 45	T6B0	JC02	10W	969 lm	12°	DC CASAMBI	35 3500K
				9W	1101 lm	18° / 26° / 38°	D1 0-10V Dim	40 4000K
	Viivo 58	T6B1	JC01	15W	1632 lm	12° / 18°		
				14W	1730 lm	24° / 34°		
CRI>97 3000K High Rendering	Viivo 35	T6A9	E013	5W	691 lm	20° / 24° / 38°		
	Viivo 45	T6B0	JC02	10W	922 lm	12°		
				9W	975 lm	18° / 26° / 38°		
	Viivo 58	T6B1	JC01	15W	1418 lm	12° / 18°		
				14W	1590 lm	24° / 34°		

TicTok Twins

Micro Track

The TicTok Twins series is an energy-saving micro track system with an integrated driver, which focuses on modularity and eco-friendliness. The tool-free, interchangeable LED module facilitates design flexibility and ease of on-site maintenance.

Available in two different adjustable light head sizes Ø25 and Ø35, with versatile aiming angle tiltable 0°-70° and rotatable 360°.

TicTok Twins is available with Casambi and DALI dimming options; DALI dimmable fixtures can also be controlled by Casambi DALI Broadcast.

For complete code ordering information, please see pages 74-77.

LED Sources:

High Efficacy:
CRI: 90 & 93 | CCT: 2700K, 3000K, 3500K, 4000K.

Accessories:

For more information about Micro 48V track system accessories see pages 68-69.

- 65 - Embossed Matt Black
- 54 - Embossed Matt White
- 1Y - Embossed Matt Total White
- 27 - Chrome Polished

TicTok 25 & 35 Twins




65

54

1Y

27

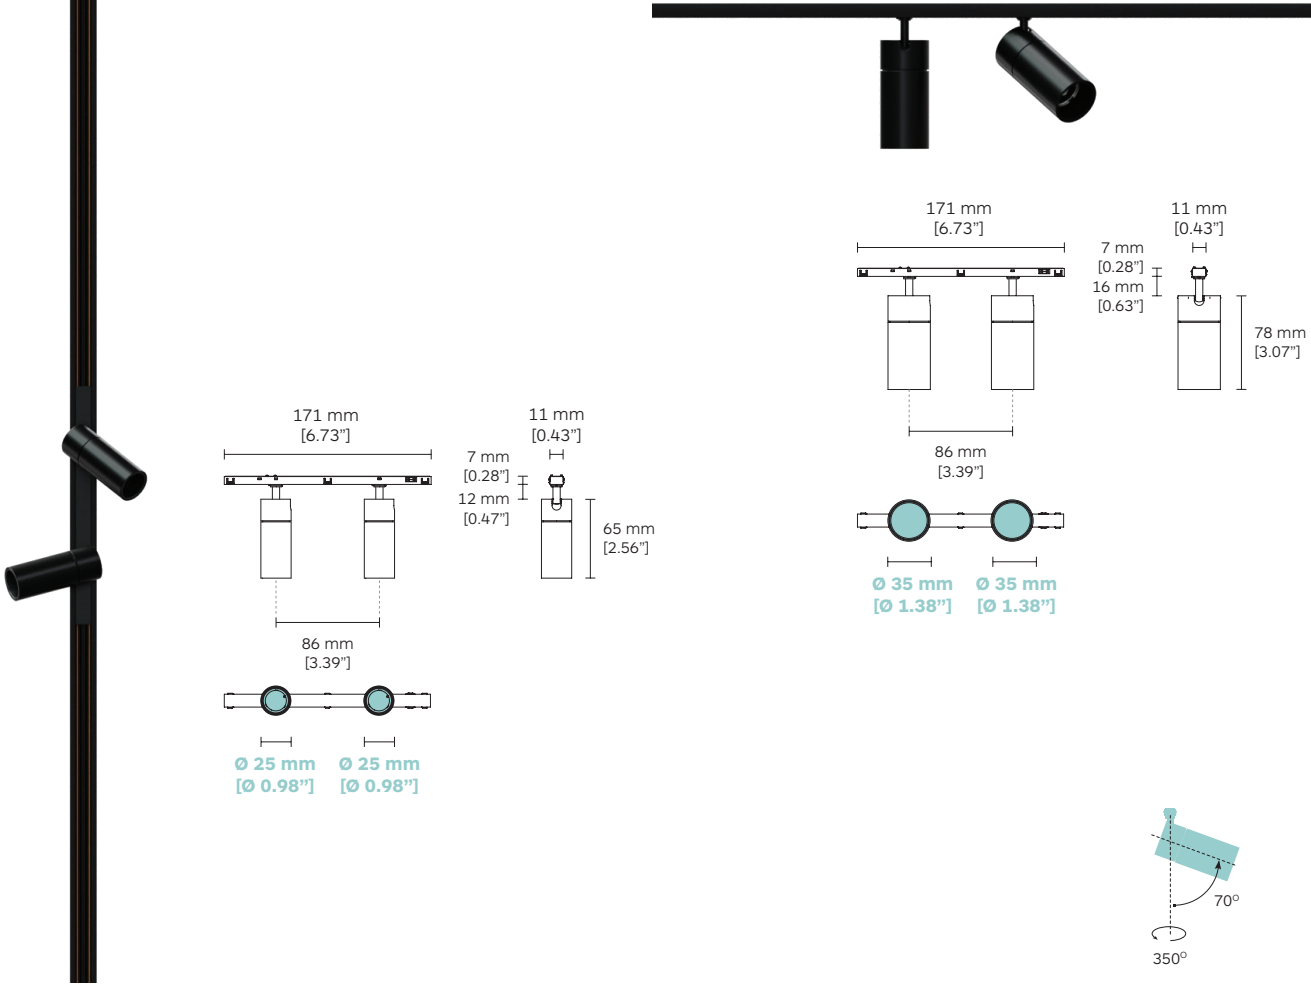

		Product Code	LED Module Code	LED Power	Nominal Lumen	Beam Angle (BA°)	Dimming Options
CRI>90 3000K High Efficacy	TicTok 25 Twins	T6J8	E017	2 x 3.4W	2 x 370 lm	15° / 20° / 32°	00 No Driver DA Dali Dim DC CASAMBI D1 0-10V Dim
CRI>93 3000K High Efficacy	TicTok 35 Twins	T6J9	E013	2 x 5W	2 x 691 lm	20° / 24° / 38°	
							CCT Options
							27 2700K
							30 3000K
							35 3500K
							40 4000K

TicTok

25 | 35 | 45 | 58
Micro 48V Track

The TicTok series is an energy-saving micro track system with an integrated driver, which focuses on modularity and eco-friendliness. The tool-free interchangeable LED module facilitates design flexibility and ease of on-site maintenance. Designed to be the perfect solution for accent lighting in sustainable lighting design schemes for retail, hospitality and high-end residential.

TicTok is available with Casambi and DALI control options. DALI dimmable fixtures can also be controlled by Casambi DALI Broadcast device, please see pages 56-57 for details.

For complete code ordering information, please see pages 74-77.



LED Sources:

High Efficacy:
CRI: 90 & 93 | CCT: 2700K, 3000K, 3500K, 4000K.

High Rendering:
CRI: 97 | CCT: 2700K, 3000K, 3500K, 4000K.

Accessories:

- Wide & Dense Texture Honeycomb Louvre
 - Elliptical Beam Diffuser
 - Coloured Glasses Diffuser
 - Opal Lens
 - Spread Lens
 - Cross blade Louvre
 - Barn doors
 - Wallwasher Cone 45°
- Please see page 27 for details.

- 65 - Embossed Matt Black
- 54 - Embossed Matt White
- 1Y - Embossed Matt Total White
- 27 - Chrome Polished



TicTok 25

65

54

1Y

27



CRI>90
3000K
High
Efficacy






TicTok 25

Product Code	LED Module Code	LED Power	Nominal Lumen	Beam Angle (BA°)	Dimming Options
T6B2	E017	3.4W	370 lm	15° / 20° / 32°	D0 No Dim DA Dali Dim DC CASAMBI D1 0-10V Dim
					CCT Options
					27 2700K
					30 3000K
					35 3500K
					40 4000K

TicTok 35



TicTok 45

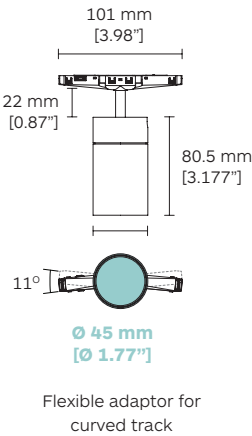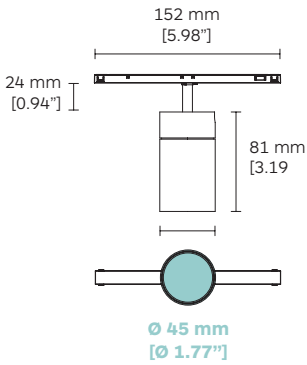

		Product Code	LED Module Code	LED Power	Nominal Lumen	Beam Angle (BA°)
CRI>90 3000K High Efficacy	TicTok 35	T6B3	E063	2.1W	195 lm	05°

CRI>93 3000K High Efficacy	TicTok 35	T6B3	E013	0.5W	691 lm	20° / 24° / 38°
----------------------------------	-----------	------	------	------	--------	-----------------

- Dimming Options
- D0 No Dim
 - DA Dali Dim
 - DC CASAMBI
 - D1 0-10V Dim

- CCT Options
- 27 2700K
 - 30 3000K
 - 35 3500K
 - 40 4000K



		Product Code	LED Module Code	LED Power	Nominal Lumen	Beam Angle (BA°)
CRI>90 3000K High Efficacy	TicTok 45	T662	JC02	10W	969 lm	12°
	TicTok 45 Curved Track	T6B4		9W	1101 lm	18° / 26° / 38°

CRI>97 3000K High Rendering	TicTok 45	T662	JC02	10W	922 lm	12°
	TicTok 45 Curved Track	T6B4		9W	975 lm	18° / 26° / 38°


- Dimming Options
- D0 No Dim
 - DA Dali Dim
 - DC CASAMBI
 - D1 0-10V Dim

- CCT Options
- 27 2700K
 - 30 3000K
 - 35 3500K
 - 40 4000K

TicTok 58

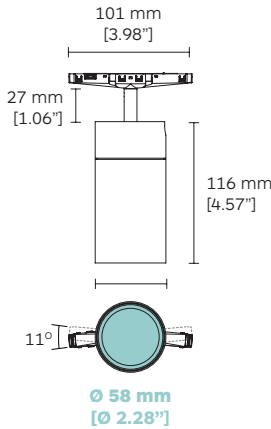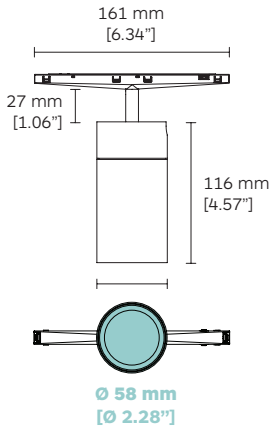

Flexible adaptor for curved track



		Product Code	LED Module Code	LED Power	Nominal Lumen	Beam Angle (BA°)
CRI>90 3000K High Efficacy	TicTok 58	T664	JC01	15W	1632 lm	12° / 18°
	TicTok 58 Curved Track	T6B5		14W	1730 lm	24° / 34°

CRI>97 3000K High Rendering	TicTok 58	T664	JC01	15W	1418 lm	12° / 18°
	TicTok 58 Curved Track	T6B5		14W	1590 lm	24° / 34°

- Dimming Options
- D0 No Dim
 - DA Dali Dim
 - DC CASAMBI
 - D1 0-10V Dim

- CCT Options
- 27 2700K
 - 30 3000K
 - 35 3500K
 - 40 4000K

Optical Accessories



Product / Optical Accessories	Coloured Glasses Diffuser	Opal Lens	Spread Lens	Elliptical Beam Diffuser	Wide Texture Honeycomb Louvre
	25, 42, 55, 85	Colour 41	Colour 41	Colour 41	Colour 10
TicTok 25 & Viivo 25	2G57	2G59	/	2G61	2G30
TicTok 35 & Viivo 35	2G58	2G60	/	2G62	2G31
TicTok 45 ¹ & Viivo 45 ¹	2F91	2F94	2F97	2F88	2F71
TicTok 58 ¹ & Viivo 58 ¹	2F92	2F95	2F98	2F89	2F83



Product / Optical Accessories	Dense Texture Honeycomb Louvre	Cross blade Louvre	Barn Doors	Wallwasher Cone 45°
	Colour 10	Colours 10, 17	Colours 10, 11	Colours 10, 17
TicTok 25 & Viivo 25	2G32	/	/	/
TicTok 35 & Viivo 35	2G33	/	/	/
TicTok 45 ¹ & Viivo 45 ¹	2F85	2G01	2G04	2G07
TicTok 58 ¹ & Viivo 58 ¹	2F86	2G02	2G05	2G08

Notes:
¹ No optical accessories are available for Viivo & TicTok 45, 58 Zoom series.

TicTok Zoom

45 | 58
Micro 48V Track



- 65 - Embossed Matt Black
- 54 - Embossed Matt White
- 1Y - Embossed Matt Total White
- 27 - Chrome Polished

The TicTok Zoom 45 and 58 mm offers all the unique features of its family members, with the added benefit of beam angle control. Simply adjust the beam angle from 12° - 37° manually through its ring rotation mechanism. It offers a versatile aiming angle tiltable 0° - 70° and rotatable 360°.

TicTok Zoom is available with Casambi and DALI control options. DALI dimmable fixtures can also be controlled by Casambi DALI Broadcast device, please see pages 56-57 for details.

For complete code ordering information, please see pages 74-77.



LED Sources:

High Efficacy:
CRI: 90 | CCT: 2700K, 3000K, 3500K, 4000K.

High Rendering:
CRI: 97 | CCT: 2700K, 3000K, 3500K, 4000K.

Accessories:

For more information about Micro 48V track system accessories see pages 68-69.

TicTok Zoom 45





65



54

1Y

27



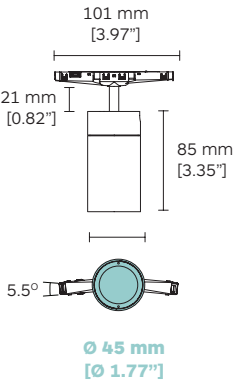
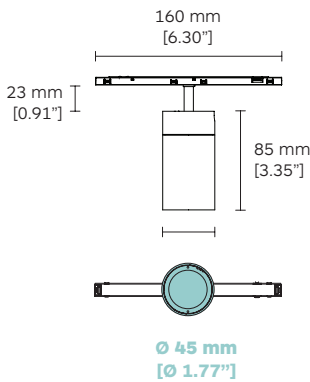


Flexible adaptor for curved track

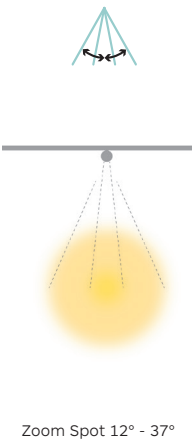

		Product Code	LED Module Code	LED Power	Nominal Lumen	Beam Angle (BA°)	Dimming Options	CCT Options
CRI>90 3000K High Efficacy	TicTok Zoom 45	T6A6	E077	5.5W	634 lm	BS (15°- 47°)	D0 No Dim	27 2700K
	TicTok Zoom 45 Curved Track	T6B6					DA Dali Dim	30 3000K
CRI>97 3000K High Rendering	TicTok Zoom 45	T6A6	E077	5.5W	606 lm		DC CASAMBI	35 3500K
	TicTok Zoom 45 Curved Track	T6B6					D1 0-10V Dim	40 4000K
							DN On board Dim	

TicTok Zoom 58

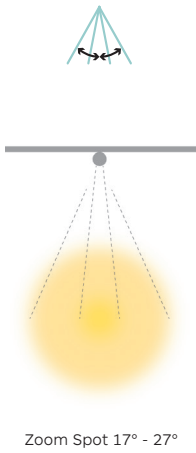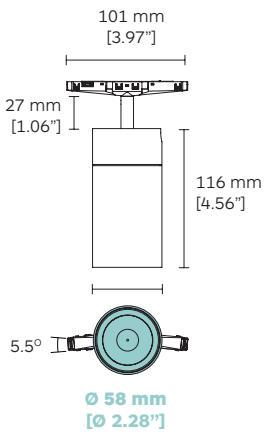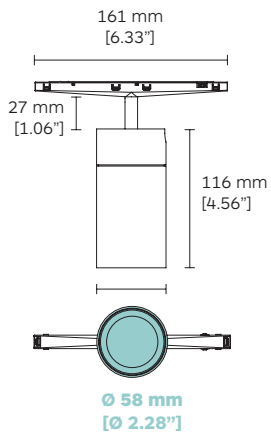

Flexible adaptor for curved track

		Product Code	LED Module Code	LED Power	Nominal Lumen	Beam Angle (BA°)	Dimming Options	CCT Options
CRI>90 3000K High Efficacy	TicTok Zoom 58	T6A7	E030	15W	1632 lm	BS (17° - 34°)	D0 No Dim	27 2700K
	TicTok Zoom 58 Curved Track	T6B7					DA Dali Dim	30 3000K
CRI>97 3000K High Rendering	TicTok Zoom 58	T6A7	E030	15W	1418 lm		DC CASAMBI	35 3500K
	TicTok Zoom 58 Curved Track	T6B7					D1 0-10V Dim	40 4000K
							DN On board Dim	





Zero 12

Micro 48V Track



Zero 12 and Zero 12 Alto is a low voltage miniature spot designed & developed for retail, showcase display, and museum lighting applications. Tiny yet mighty this ultra-miniature track spot is Ø12.5mm in size and is compatible with anti-glare accessories snoot with magnetic fixing mechanism. Zero 12 Alto comes with an integrated snoot.

Zero 12 is available with Casambi and DALI control options. DALI dimmable fixtures can also be controlled by Casambi DALI Broadcast device, please see pages 56-57 for details.

For complete code ordering information, please see pages 74-77.

LED Sources:

High Rendering:
CRI: 97 | CCT: 2700K, 3000K, 3500K, 4000K.

Accessories:

For more information about Micro 48V track system accessories see pages 68-69.

- 10 - Black
- 11 - White
- 65 - Embossed Matt Black
- 54 - Embossed Matt White
- 1A - Chrome Gold



Zero 12




10

11

65

54

1A

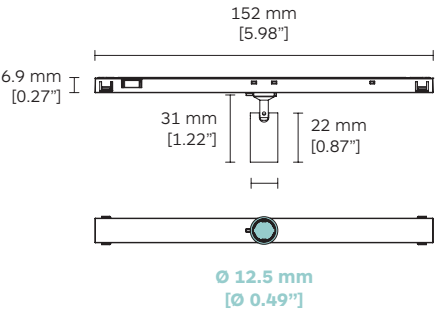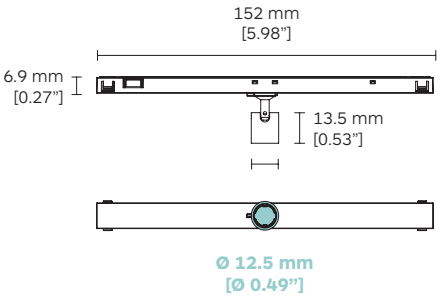

CRI>97
3000K
High
Rendering

	Product Code	Light Source Code	LED Power	Nominal Lumen	Beam Angle (BA°)	Dimming Options	CCT Options
Zero 12	T964	BN12	1W	117 lm	19° / 33° / EL	D0 No Dim	27 2700K
Zero 12 Alto	T966				19° / 31°	DA Dali Dim	30 3000K
						DC CASAMBI	35 3500K
							40 4000K

EL = Elliptical Beam (24° x 44°)

Zero 33

Micro 48V Track



The Zero 33 is an addition to the Zero collection, with Ø33mm in size, fully adjustable spotlight that features an onboard beam angle adjustment of 8-80° and onboard dimming control 1-100% to adjust the light's intensity while remaining invisible from the short distances.

The Zero 33 is available with Casambi and DALI control options. DALI dimmable fixtures can also be controlled by Casambi DALI Broadcast device, please see pages 56-57 for details.

For complete code ordering information, please see pages 74-77.


LED Sources:

High Efficacy:
CRI: 90 | CCT: 2700K, 3000K, 3500K, 4000K.


Accessories:

- Diffuser or color filter
 - Honeycomb
 - Barn doors
- Magnet-fixed, toolless, easily replaceable.
See page 33.

-  **10** - Black
-  **11** - White
-  **08** - Gold




Zero 33

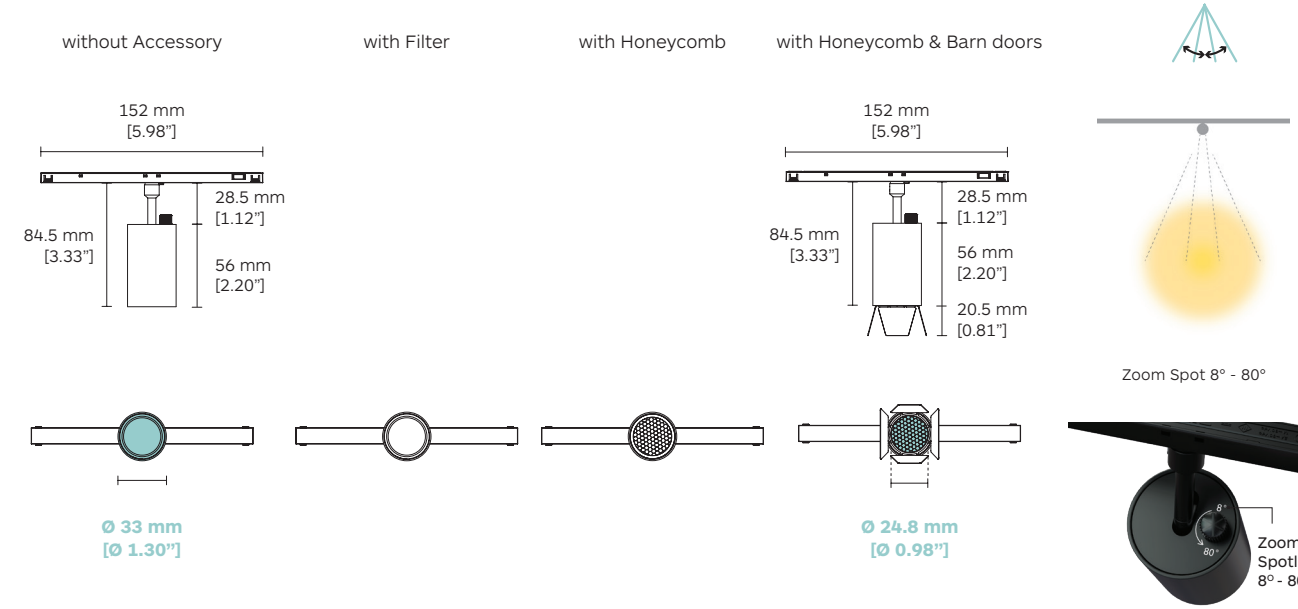

	Product Code	Light Source Code	LED Power	Nominal Lumen	Beam Angle (BA°)	Dimming Options	CCT Options
CRI>90 3000K High Efficacy	Zero 33	T963	BR21	4.5W	448 lm	BS (8 - 80°)	
						D0 No Dim	27 2700K
						DA Dali Dim	30 3000K
						DC CASAMBI	35 3500K
						DN On board Dim	40 4000K

Optical Accessories

Product / Optical Accessories	Filter	Honeycomb	Barn doors
			
		Colour 10	Colours 10, 11, 35
Zero 33	G2A6	G2A7	G2A1

BS = Beam Shaping.

Zero Framing Projector

Micro Track

Advanced, multi-functional LED track-mounted projector, tiltable vertically 0°-90° and rotatable horizontally 350°. With built-in bidirectional zooming lens with sharpness adjustability, and lens rotation. Adjustable shutters to re-frame the beam to the desired size and shape (circle, square/rectangle, or irregular four-sided shapes).

Compatible with gobo insertion for the logo. High-precision optics for sharp outlines and high degree of lighting uniformity.



For complete code ordering information, please see page 35.

LED Sources:
High Rendering:
CRI: 97 | CCT: 2700K, 3000K, 3500K, 4000K.

Accessories:
• Gobo Film, see page 15 for details.
Contact us for custom-made logo projection lens.

- 10 - Black
- 11 - White

Zero Framing Projector Micro Track

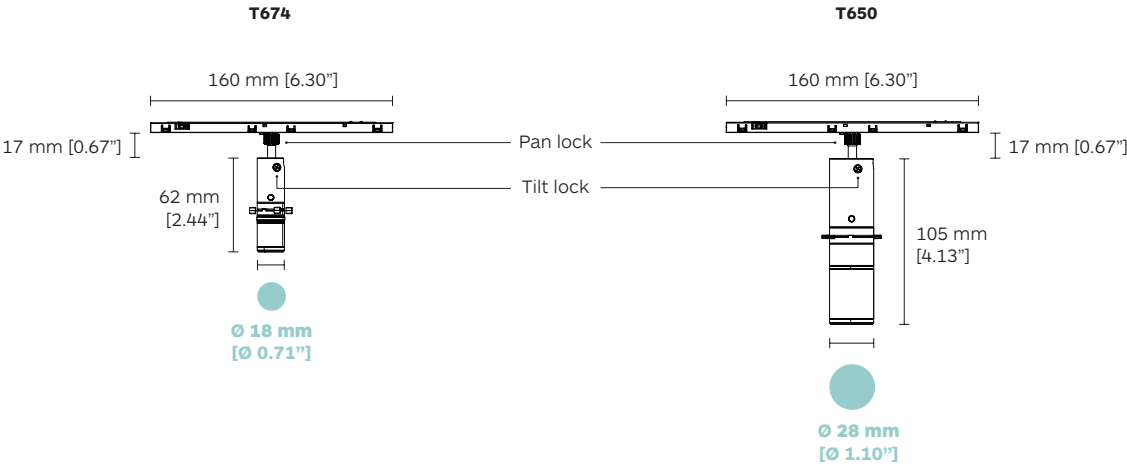

	Product Code	LED Source Code	LED Power	Nominal Lumen	Beam Angle (BA°)	Dimming Options	CCT Options
CRI>97 3000K High Rendering	Zero Framing Projector 18	T674	BC52	2.4	205 lm	BS (15° - 33°)	27 2700K
	Zero Framing Projector 28	T650	BC53	4.8	470 lm	BS (11° - 32°)	30 3000K
						DC CASAMBI	35 3500K
							40 4000K

BS: Beam Shaping.

Polaris Micro 48V Track System

The Polaris Series die-cast aluminum in four different types, the standard aisle spotlight version with an integrated diamond faceted no-dazzle screen in thermoplastic; the adjustable version allows extra flexibility, diffused version for soft and diffuse illumination and the wallwasher version for high precision light control.

Polaris 20 Opal Diffuser

Polaris 20

Polaris 20 Wallwasher

Polaris 20

Micro 48V Track

Polaris 20 Low Voltage micro track light in extruded aluminum in four different lengths of light modules, aisle spotlight with special high-definition optics made of thermoplastic material, integrated into the innovative black antiglare finishes that define emission with luminance glare control.

Polaris 20 is available with Casambi and DALI control options. DALI dimmable fixtures can also be controlled by Casambi DALI Broadcast device, please see pages 56-57 for details.

For complete code ordering information, please see pages 74-77.

LED Sources:

High Rendering:
CRI: 90 | CCT: 2700K, 3000K, 3500K, 4000K.

Accessories:

For more information about Micro 48V track system accessories see pages 68-69.

- 10 - Black
- 11 - White



- 10
- 11

4 LEDs

8 LEDs

12 LEDs

16 LEDs

152 mm
[5.98"]

79 mm
[3.11"]

152 mm
[5.98"]

155 mm
[6.10"]

152 mm
[5.98"]

231 mm
[9.09"]

152 mm
[5.98"]

307 m
[12.09"]

7.6 mm
[0.30"]

25 mm
[0.98"]

22.5 mm
[0.89"]

	Product Code	Light Source Code	LED Power	Nominal Lumen	Beam Angle (BA°)	Dimming Options
CRI>90 3000K High Rendering	Polaris 20 with 4 LEDs	T601	4 x 0.9W	480 lm	21° / 30° / 45° / 60°	D0 No Dim
	Polaris 20 with 8 LEDs	T602		960 lm		DA Dali Dim
	Polaris 20 with 12 LEDs	T603	12 x 0.9W	1440 lm		DC CASAMBI
	Polaris 20 with 16 LEDs	T604	16 x 0.9W	1920 lm		

CCT Options

27 2700K

30 3000K

35 3500K

40 4000K

TW 2700K-5700K

Tuneable White (TW) version available on request.

Polaris 20 Wallwasher

Micro 48V Track

Polaris 20 Wallwasher Low Voltage micro track light in extruded aluminum in four different lengths, aisle spotlight with special high-definition optics made of thermoplastic material, integrated glare shield with luminance glare control, energy-efficient high-power LEDs with excellent color rendering; wallwasher light distribution with supreme uniformity.

Polaris 20 Wallwasher is available with Casambi and DALI control options. DALI dimmable fixtures can also be controlled by Casambi DALI Broadcast device, please see pages 56-57 for details.

For complete code ordering information, please see pages 74-77.

LED Sources:

High Efficacy:
CRI: 90 | CCT: 2700K, 3000K, 3500K 4000K.

Accessories:

For more information about Micro 48V track system accessories see pages 68-69.

- 10 - Black
- 11 - White








3 LEDs

6 LEDs

9 LEDs

12 LEDs

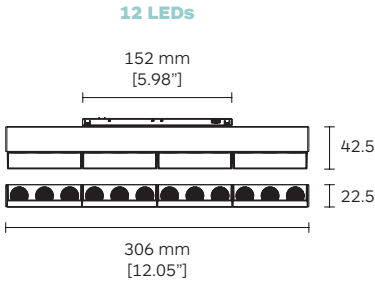

CRI>90 3000K High Efficacy		Product Code	Light Source Code	LED Power	Nominal Lumen	Beam Angle (BA°)	Dimming Options
	Polaris 20 Wallwasher with 3 LEDs	T626	BN11	3 x 1.4W	525 lm	WW*	D0 No Dim DA Dali Dim DC CASAMBI
	Polaris 20 Wallwasher with 6 LEDs	T627		6 x 1.4W	1050 lm		
	Polaris 20 Wallwasher with 9 LEDs	T628		9 x 1.4W	1575 lm		
	Polaris 20 Wallwasher with 12 LEDs	T629		12 x 1.4W	2100 lm		
							CCT Options 27 2700K 30 3000K 35 3500K 40 4000K TW 2700K-5700K

* WW = Wallwasher. Ordering code; **WW**.
Tuneable White (**TW**) version available on request.

Polaris 20 Opal Diffuser

Micro 48V Track



L: 307

L: 611

L: 915

L: 1219

L: 1523

- 10 - Black
- 11 - White

Polaris 20 Opal Diffuser Low Voltage micro track light body in extruded aluminum inclusive of white opal diffuser for soft and diffuse illumination. Available in five different lengths up to 1522mm; high-power LEDs with excellent color rendering.

Polaris 20 Opal Diffuser is available with Casambi and DALI control options. DALI dimmable fixtures can also be controlled by Casambi DALI Broadcast device, please see pages 56-57 for details.


For complete code ordering information, please see pages 74-77.

LED Sources:

High Rendering:
CRI: 97 | CCT: 2700K, 3000K, 3700K, 4000K.

Accessories:

For more information about Micro 48V track system accessories see pages 68-69.

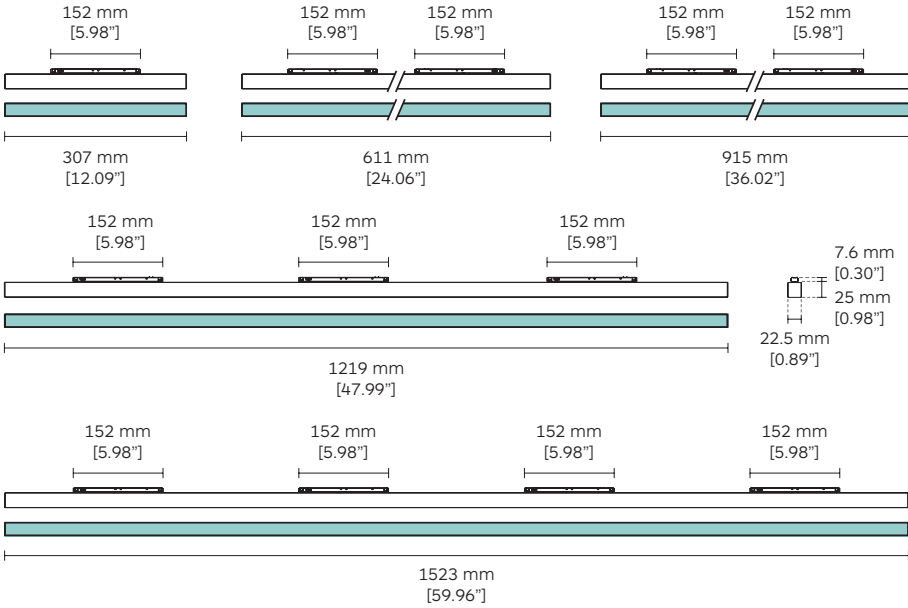

CRI>97
3000K

High
Rendering

	Product Code	Light Source Code	LED Power	Nominal Lumen	Beam Angle (BA°)	Dimming Options
Polaris 20 Opal Diffuser L:307	T676	BT21	7.4W	945 lm	OD	DO No Dim
Polaris 20 Opal Diffuser L:611	T677		15W	1890 lm		DA Dali Dim
Polaris 20 Opal Diffuser L:915	T678		22W	2835 lm		DC CASAMBI
Polaris 20 Opal Diffuser L:1219	T679		30W	3780 lm		CCT Options
Polaris 20 Opal Diffuser L:1523	T680		37W	4725 lm		27 2700K
						30 3000K
						35 3500K
						40 4000K
						TW 2700K-5700K

OD = Opal diffuser. Ordering code: **OD**.
Tuneable White (**TW**) version available on request.

Pixxo Retro

Micro 48V Track

Pixxo Retro - A modern cylinder pendant LED Light, that offers both classic filament ambient light and modern accent light. LED filament light is designed to resemble a traditional incandescent light bulb with visible filaments for aesthetic and create ambient; the spotlight with multiple beam angle options provides functional accent lighting.

Pixxo Retro is available with Casambi and DALI control options. DALI dimmable fixtures can also be controlled by Casambi DALI Broadcast device, please see pages 56-57 for details.

For complete code ordering information, please see page 69.

LED Sources:



Ambient light:
CRI: 80 | CCT: 2200K.

Spot light:
High Efficacy
CRI: 90 | CCT: 2700K, 3000K, 3500K, 4000K.

Accessories:

For more information about Micro 48V track system accessories see pages 68-69.

- 10 - Black
- 65 - Embossed Matt Black
- 11 - White
- 54 - Embossed Matt White

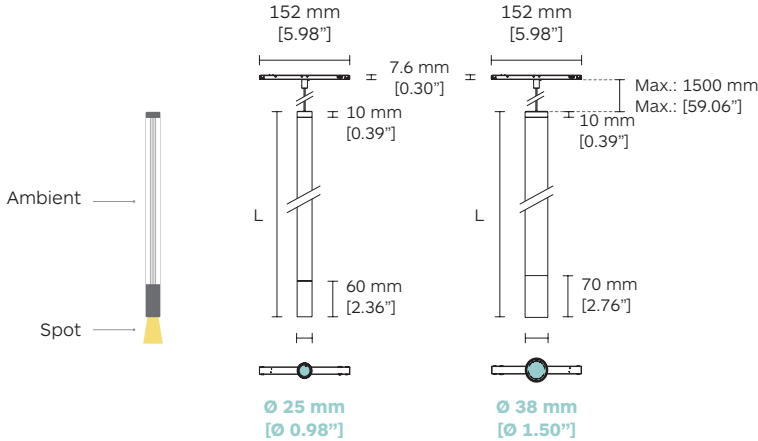

	Product Code	Length Cable Code ¹	LED Power ²		Nominal Lumen		Beam Angle (BA°)
			Ambient	Spot	Ambient	Spot	
			CRI>80	CRI>90	CRI>80	CRI>90	
			2200K	2700K / 3000K	2200K	2700K / 3000K	
Pixxo Retro 25 L:200	T656	Min. 0100	4.9W	/	397 lm	/	
Pixxo Retro 25 L:344	T657	⋮	/	2.8W	/	304 lm / 333 lm	15° / 20° / 32°
		Max. 1500					
Pixxo Retro 38 L:208	T658		4.9W	/	397 lm	/	/
Pixxo Retro 38 L:345	T659		/	6.8W	/	679 lm / 705 lm	20° / 26° / 36°

- Dimming Options
- DO No Dim
 - DA Dali Dim
 - DC CASAMBI

- CCT Options
- 27 2700K
 - 30 3000K
 - 35 3500K
 - 40 4000K

¹ Length cable code from 500mm up to 1500mm. Example: 0500.
² 2 control channels, spot light and ambient light can be controlled separately.

Pixxo Retro

Micro 48V Track

Pixxo Retro body in glass and extruded aluminum, available in 2 different diameters and 3 different lengths. Combined with the micro range offers different track profiles to give the maximum flexibility to lighting projects.

Pixxo Retro can also be controlled by Casambi DALI Broadcast device, please see pages 56-57 for details.

For complete code ordering information, please see pages 74-77.

LED Sources:


Ambient light:
CRI: 80 | CCT: 2200K.

Spot light:
High Efficacy
CRI: 90 | CCT: 2700K, 3000K, 3500K, 4000K.

Accessories:

For more information about Micro 48V track system accessories see pages 68-69.

- 10 - Black
- 65 - Embossed Matt Black
- 11 - White
- 54 - Embossed Matt White

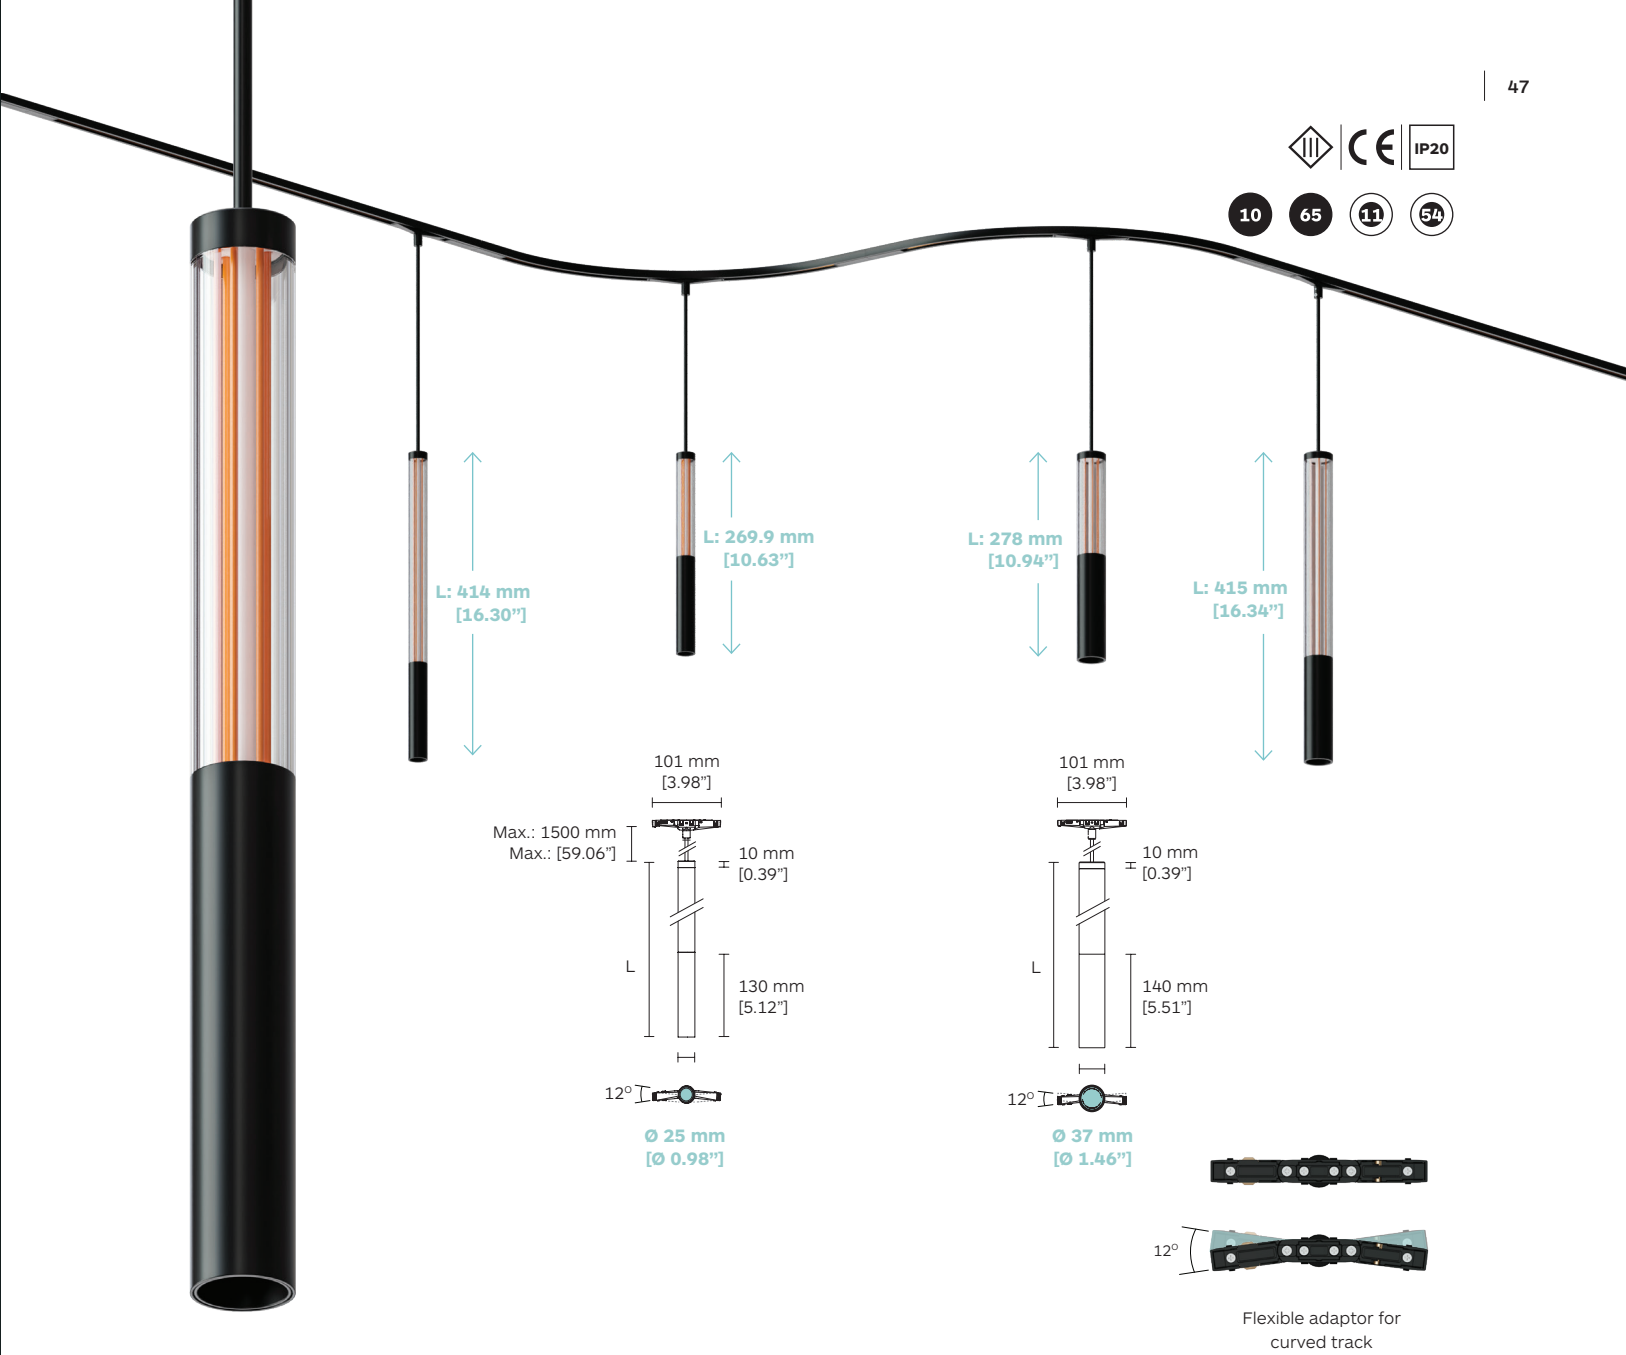

	Product Code	Length Cable Code ¹	LED Power ²		Nominal Lumen		Beam Angle (BA°)	Dimming Options
			Ambient	Spot	Ambient	Spot		
			CRI>80	CRI>90	CRI>80	CRI>90		
			2200K	2700K / 3000K	2200K	2700K / 3000K		D0 No Dim
Pixxo Retro 25 Curved Track L:270	T6B8	0500 1000 1500	4.9W	/	397 lm	/	/	
Pixxo Retro 25 Curved Track L:414	T6B9		/	2.8W	/	304 lm / 333 lm	15° / 20° / 32°	CCT Options
Pixxo Retro 38 Curved Track L:278	T6C0		4.9W	/	397 lm	/	/	27 2700K
Pixxo Retro 38 Curved Track L:415	T6C1		/	6.8W	/	679 lm / 705 lm	20° / 26° / 36°	30 3000K 35 3500K 40 4000K

¹ Length cable code from 500mm up to 1500mm. Example: 0500.
² 2 control channels, spot light and ambient light can be controlled separately.

Pixxo Micro 48V Track System

Minimal design makes Pixxo pendant the perfect solution for the hospitality and residential projects when combined with the ultra-compact Micro track system that results in a solution that can make a difference in lighting projects where aesthetics and attention to detail are fundamental.

Pixxo

Micro 48V Track



- 10** - Black
- 65** - Embossed Matt Black
- 11** - White
- 54** - Embossed Matt White

Pixxo Micro Track 48V is the new suspension solution for 48V track. Light body is available in two diameters (25 and 36mm) and different lengths, to fit any ceiling height. Exchangeable front rings in a wide range of colors make Pixxo extremely applicable for every project.

Pixxo is available with Casambi and DALI control options. DALI dimmable fixtures can also be controlled by Casambi DALI Broadcast device, please see pages 56-57 for details.






For complete code ordering information, please see pages 74-77.

LED Sources:

High Efficacy:
CRI: 90 | CCT: 2700K., 3000K, 3500K, 4000K.

Accessories:

For more information about Micro 48V track system accessories see pages 68-69.

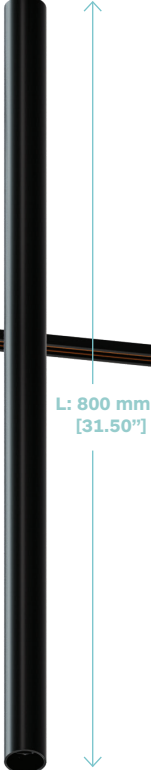

Flexible adaptor for curved track

	Product Code		Product Length (L)	Light Source Code	LED Power	Nominal Lumen	Beam Angle (BA°)	Dimming Options
	straight adaptor	curved adaptor						
CRI>90 3000K High Efficacy	Pixxo 25	T703	T739	BR21	2.8W	333 lm	15° / 20° / 32°	D0 No Dim DA Dali Dim DC CASAMBI
		T704	T740					
		T705	T741					
		T706	T742					
	Pixxo 36	T707	T745	BC35	5W	517 lm	20° / 26° / 36°	CCT Options 27 2700K 30 3000K 35 3500K 40 4000K
		T708	T746					
		T709	T747					
		T710	T748					

TicTok & Viivo

The circular series



TicTok provides innovation leadership with the new Eterno technology. The easy to change COB module provides a ready-to-use solution for greater flexibility, energy efficiency, and sustainability.

LED Modules & Lens compatibility

For TicTok & Viivo products

Product compatibility	LED Module	CRI	LED Power	LENS Compatibility Code					
				15°	20°	32°			
TicTok 25 & Twins Code: T6B2 T6J8	E017	CRI> 90	3.4W	L021	L022	L023			
Viivo 25 & Twins Code: T6A8 T6K6	¹ E017	CRI> 90	2 x 3.4W	L021	L022	L023			
¹ LED Module E017, 2 x 3.4W available for code T6J8 & T6K6.									
				05°	20°	24°	38°		
TicTok 35 & Twins Code: T6B3 T6J9	E063	CRI> 90	2.1W	L030	/	/	/		
Viivo 35 & Twins Code: T6A9 T6K7	E013	CRI> 93	5W	/	L024	L025	L026		
	¹ E013	CRI> 93	2 x 5W	/	L024	L025	L026		
¹ LED Module E013, 2 x 5W available for code T6J9 & T6K7.									
				08°	18°	28°	36°		
TicTok 45 Codes: T662 T6B4	E025	CRI> 93	9W	/	L014	L015	L016		
Viivo 45 Code: T6B0	¹ E051	CRI> 95	8W	L032	/	/	/		
	E020	CRI> 98	9W	/	L014	L015	L016		
¹ LED Module E051 available for code T622 & T6B0.									
				14°	18°	24°	25°	36°	37°
TicTok 58 Codes: T664 T6B5	E026	CRI> 93	14W	/	L017	/	L018	/	L019
Viivo 58 Code: T6B1	E031	CRI> 93	15W	L017	/	L018	/	L019	/
	E027	CRI> 98	14W	/	L017	/	L018	/	L019
TicTok 45 Zoom Codes: T6A6 T6B6	E077	CRI> 90 CRI> 97	5.5W	BS (15° - 47°)					
TicTok 58 Zoom Codes: T6A7 T6B7	E030	CRI> 90 CRI> 97	15W	BS (17° - 34°)					

Casambi DALI Broadcast



Micro 48V Track System

Casambi DALI Broadcast




For Micro track 48VDC input

Casambi DALI Broadcast offers a cutting-edge solution for controlling wireless luminaires on low-voltage (48V) tracks.

Through Casambi Bluetooth Low Energy (BLE) communication with control apps, all you need is a smartphone or tablet to take charge of your lighting system.

Imagine having complete control over the lighting in your space without the hassle of wiring, control units, or routers. With Casambi Broadcast technology, this dream is now a reality.

Group Configuration - up to 64 luminaires

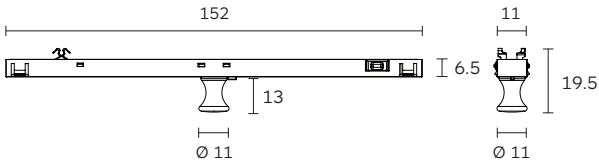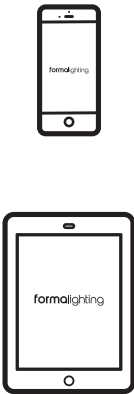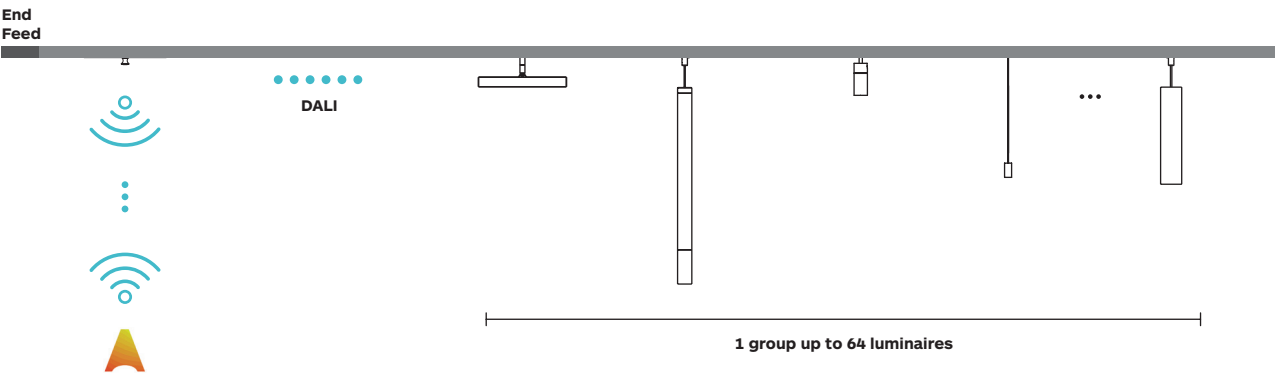


Wireless control device	
Code:	T269
Nominal Input Voltage:	24-50 Vdc
Current:	48V - 0.06 A
Output Voltage:	18 - 18.5 V DC
Output current in short circuit:	200 mA
Output channel:	1
Management protocol:	DALI

Micro 48V Track Options

1.

Pendant
Track


2STB



2.

Pendant
Track


2STC



3.

Recessed
Track
Plank


2STD

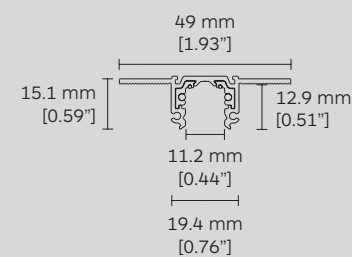

4.

Recessed
Track


2STJ



5.

Surface
Track


2STE



6.

Pendant
Kit

9268

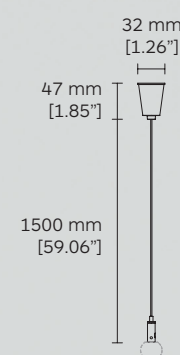


Micro 48V Curved Track




Limitless design flexibility, curved adaptor tailor-made for the micro track curved track allows a wide range of luminaires on the curved tracks. Horizontal curved tracks are available in radii of 300mm and 500mm, and vertical curved tracks in radii of 300mm to fulfill any design configuration.


Horizontal curved track

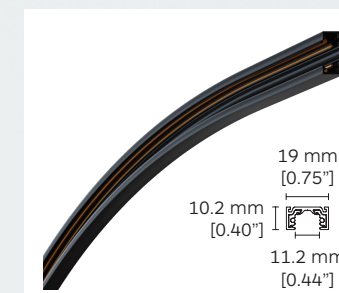

2STF




2STG



Horizontal curved track



Vertical curved track

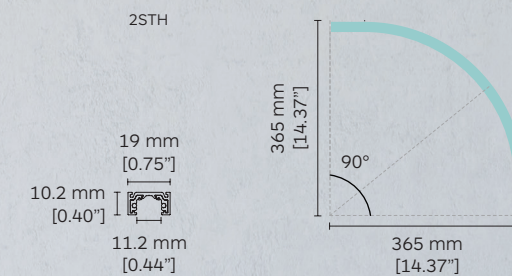





Micro 48V Track System

www.formalighting.com

















Micro Curved Track Compatibility

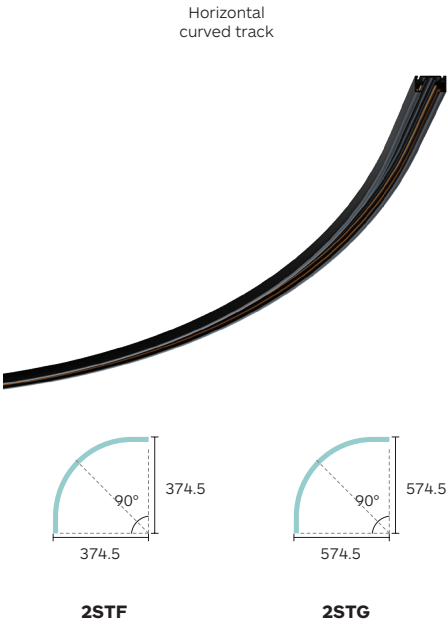

TicTok Twins 25 / 35	/	/
TicTok 25 / 35 / 45 / 58	For TicTok 45 & 58 ✓	For TicTok 45 & 58 ✓
Viivo Twins 25 / 35	/	/
Viivo 25 / 35 / 45 / 58	On Request	On Request
TicTok 45 / 58 Zoom	✓	✓
Zero 12	/	/
Zero 33	/	/
Zero Framing Projector 18 / 28	/	/
Polaris 20 Adjustable Polaris 20 Wallwasher Polaris 20 Polaris 20 Opal Diffuser	/	/
Pixxo 25 / 36	✓	✓
Pixxo Retro 25 / 38	✓	✓

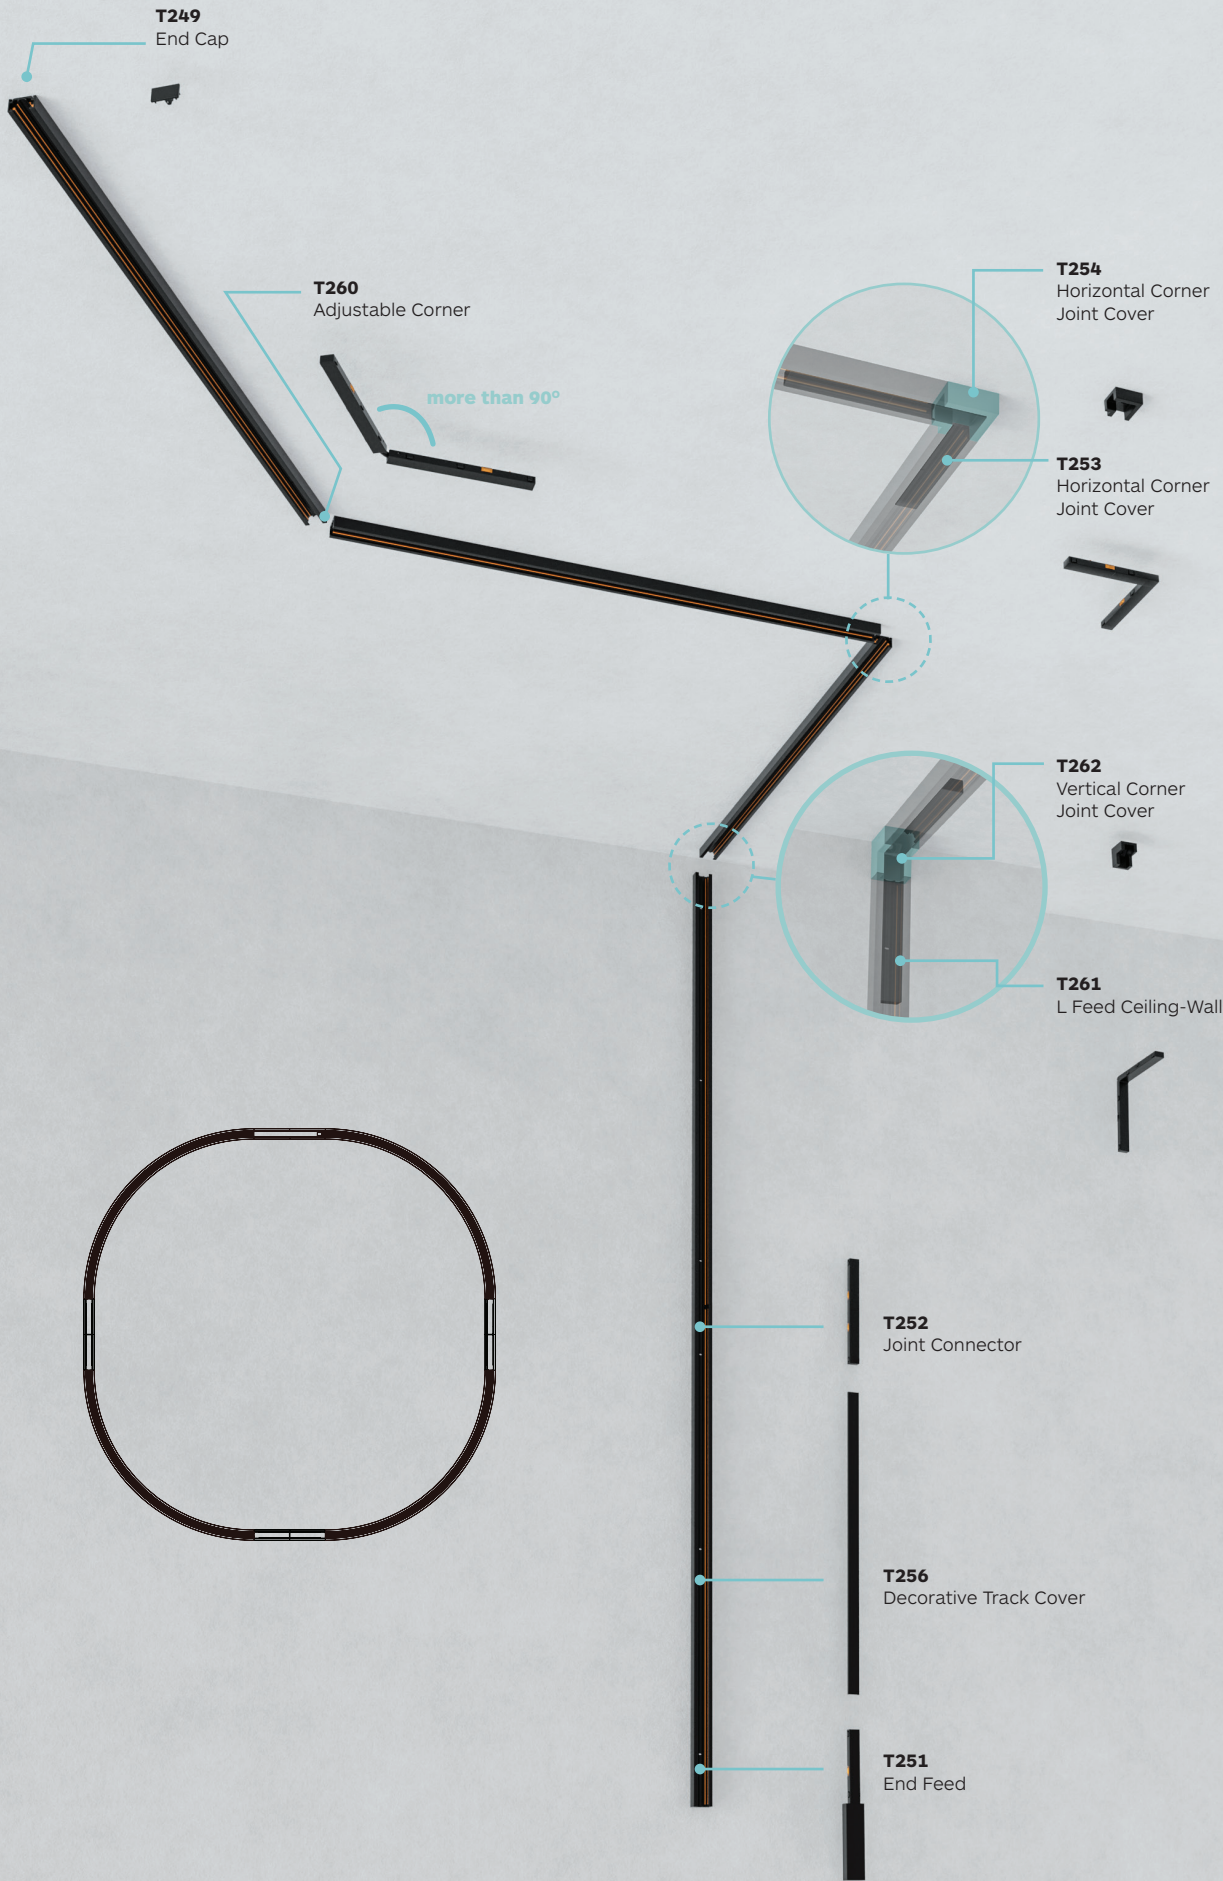

Micro Track System Accessories

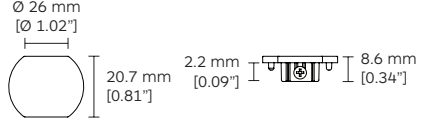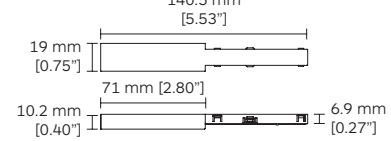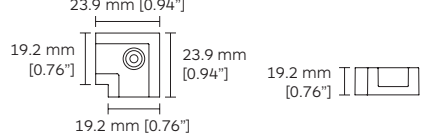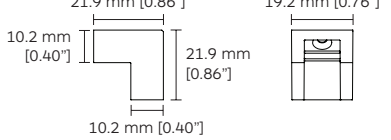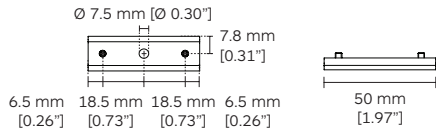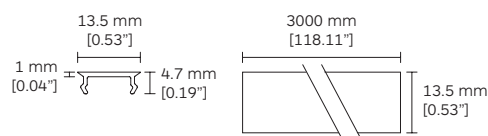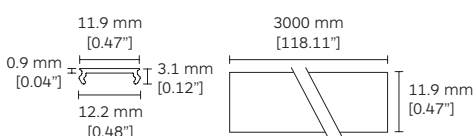
	T249 End Cap for 2STE & 2STJ Track 		T257 End Cap for 2STD Track 
	T250 End Cap for 2STB Track 		T258 End Cap for 2STC Track 
	T251 End Feed 		T259 End Feed 
	T252 Joint Connector 		T260 Adjustable Corner 
	T253 Horizontal Corner Joint Cover 		T261 L Feed Ceiling-Wall 
	T254 Horizontal Corner Joint Cover 		T262 Vertical Corner Joint Cover 
	T255 Bracket 		T263 Template for Track Installation 
	T256 Decorative Track Cover for 2STB, 2STC, 2STD 		T264 Decorative Track Cover for 2STE 

Power Supply & Control Options


Power Supply

		
	220-240VAC input, 48VDC output 70w power supply for low voltage track	220-240VAC input, 48VDC output 150w power supply for low voltage track
Code	2G35	2G36


Universal DALI

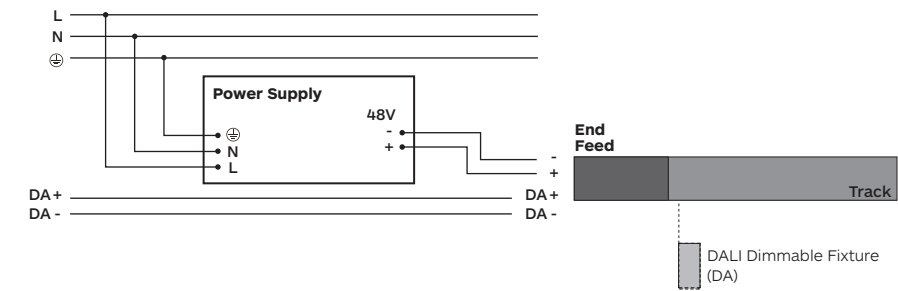

Bluetooth wireless Control

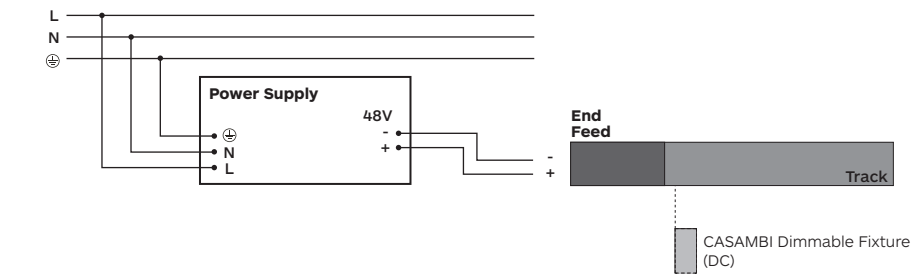

Fixed Output

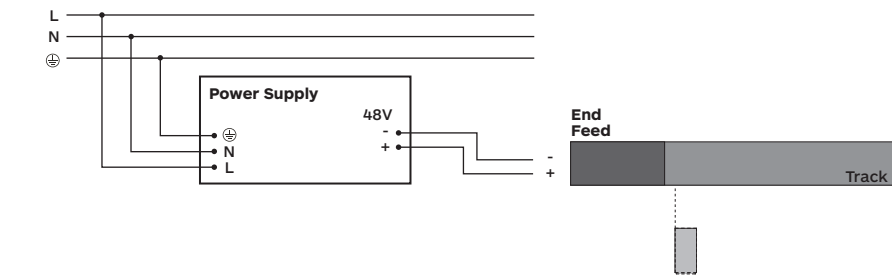


Drop Voltage Table

Power Supply (W)	A Distance power supply/feed unit (2x1.5mm²)			
	5m	10m	20m	30m
	B Track Length with Δv≤5.5% (m)			
	(m)	(m)	(m)	(m)
60	50	50	50	50
100	50	50	40	25
150	50	40	20	Not admitted
200	40	30	Not admitted	Not admitted
250	35	20	Not admitted	Not admitted

Information refers to a load equivalent to the power supplied and equally distributed on the relevant lenght in the table.

Remote Power Supply

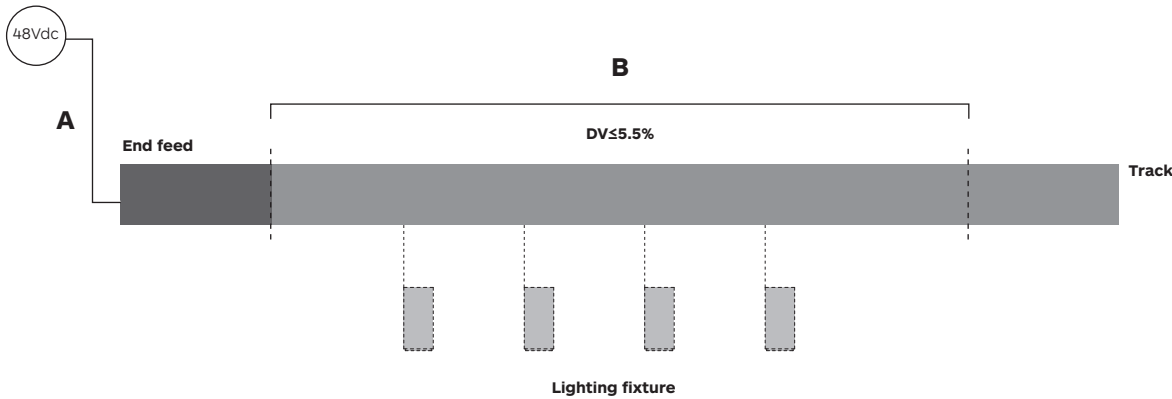

Symbols & Icon Code System Global presence

Symbols & Icons

CLASS I
Luminaires of insulation Class I - with earth connector.



CLASS II
Luminaires of insulation Class II - With safety isolation, this means the tension conductions element are protected by additional isolation.
The isolation of an earth wire it is not necessary and the connection to it is not allowed.



CLASS III
Luminaires of isolation Class III - designed for operation of protected low voltage supply (>42V).



Zoom



Passes the 850° glow wire test in accordance with IEC 695-2-1.



Passes the 960° glow wire test in accordance with IEC 695-2-1.



Dim2Warm



Tuneable White



CASAMBI



Recyclable



Symbols & Icons

European Economic Area
Declares that the product complies with all applicable European Union safety, health, and environmental protection requirements.



Canada US
Indicates that the product has been tested and meets Canadian and North American standards requirements standards for safety and performance.



Canada US
Component Recognition Mark indicates compliance with both Canadian and U.S. requirements.



IP__ Degree of Ingress Protection




1st Number	Protection Against Dust and Solid Objects	2nd Number	Protection Against Moisture and Liquids
0	No-Protection	0	No-Protection
1	Protection against solid objects >50 mm	1	Protection against dripping water
2	Protection against solid objects >12 mm	2	Protection against dripping water tilted > 15 deg
3	Protection against solid objects >2.5 mm	3	Protection against spraying water > 30 deg
4	Protection against solid objects >1 mm	4	Protection against spraying water
5	Dust - protected	5	Protection against water jet
6	Dust - tight	6	Protection against waves
		7	Protection against the effects of immersion
		8	Protection against submersion


Body Color




1Y Embossed Matt Total White (RAL 9016)




54 Embossed Matt White (RAL 9016)




65 Embossed Matt Black (RAL 9017)




10 Black (RAL 9004)




11 White (RAL 9003)




27 Chrome Polished




1A Chrome Gold




79 Brushed Aluminium ¹



3G Brushed Brass ¹



3H Antique Brass ¹




3J Blackened Brass ¹

Notes:


¹ Finish available for Viivo fixtures only.

Code System for Standard Products

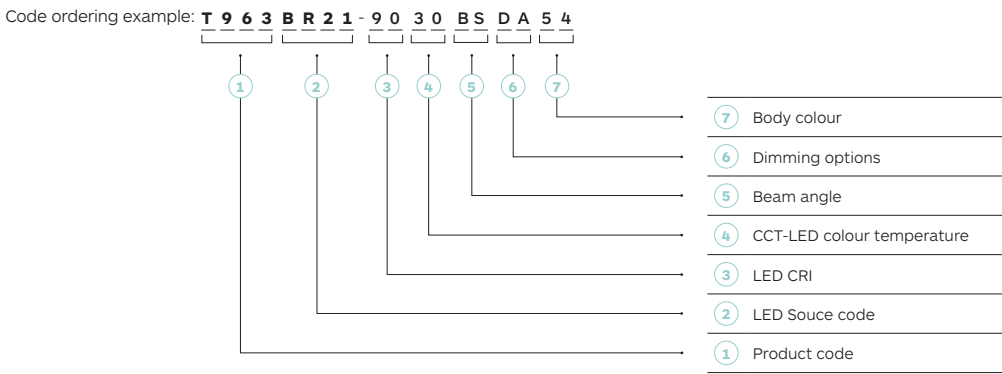


LED CRI		CCT-LED Colour temperature		Dimming Options		Body Colour	
80	CRI > 80	27	Warm White 2700K	D0	No dimming	10	Black (RAL 9004)
90	CRI > 90	30	Warm White 3000K	DA	Dali Dim	11	White (RAL 9003)
93	CRI > 93	35	Warm White 3500K	DC	CASAMBI	1A	Chrome Gold
97	CRI > 97	40	Neutral White 4000K	DN	On-board Dimmer	54	Embossed Matt White (RAL 9016)
98	CRI > 98	TW	Tuneable White 2700K - 5700K			65	Embossed Matt Black (RAL 9017)

How to order

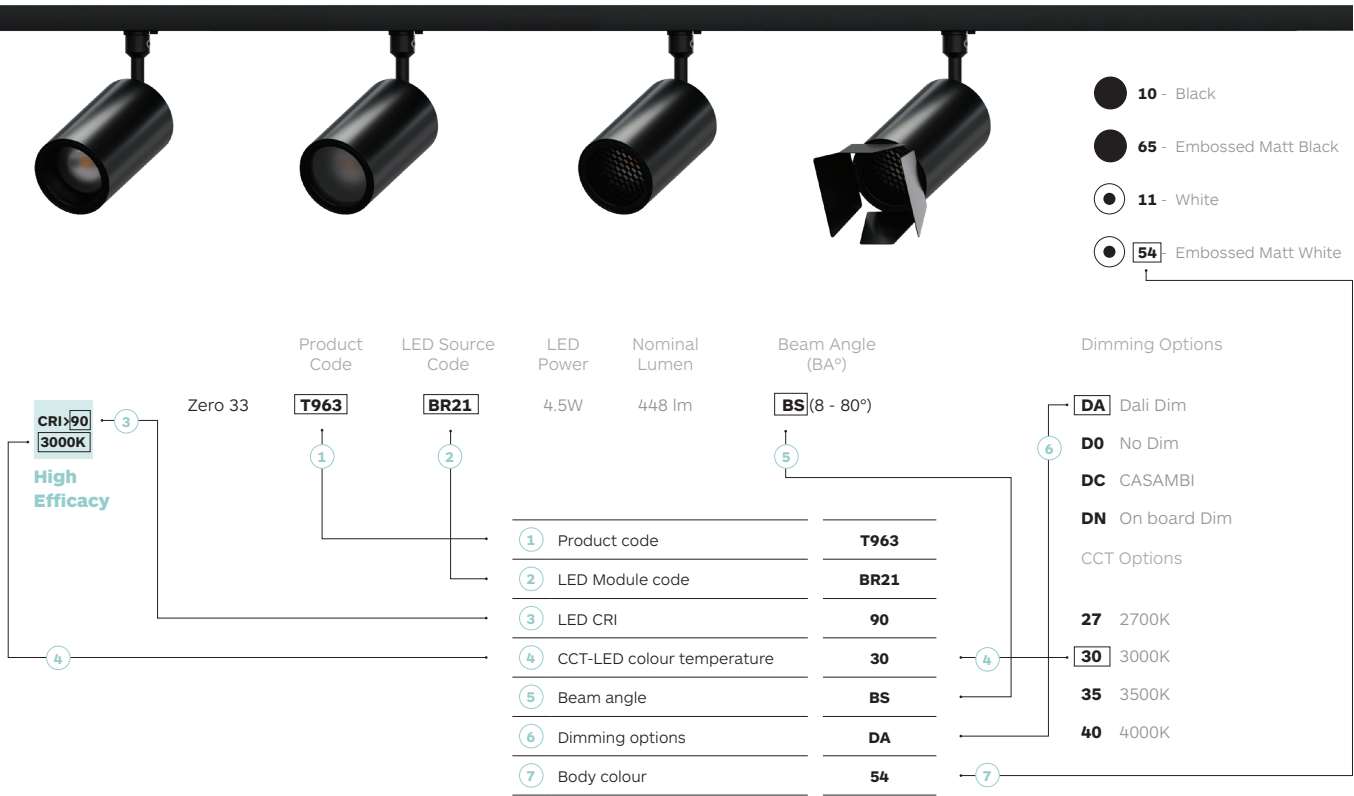


Code System for Pixxo Retro Products

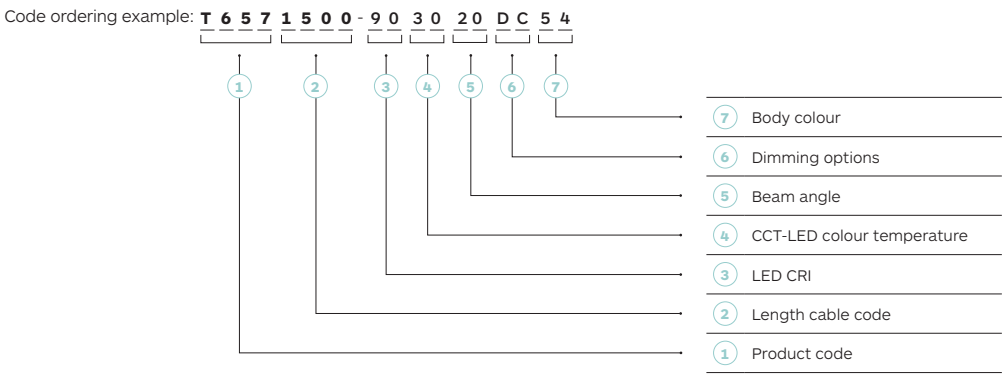


LED CRI		CCT-LED Colour temperature		Dimming Options		Body Colour	
80	CRI > 80	27	Warm White 2700K	D0	No dimming	10	Black (RAL 9004)
90	CRI > 90	30	Warm White 3000K	DA	Dali Dim	11	White (RAL 9003)
93	CRI > 93	35	Warm White 3500K	DC	CASAMBI	1A	Chrome Gold
97	CRI > 97	40	Neutral White 4000K	DN	On-board Dimmer	54	Embossed Matt White (RAL 9016)
98	CRI > 98	TW	Tuneable White 2700K - 5700K			65	Embossed Matt Black (RAL 9017)

How to order

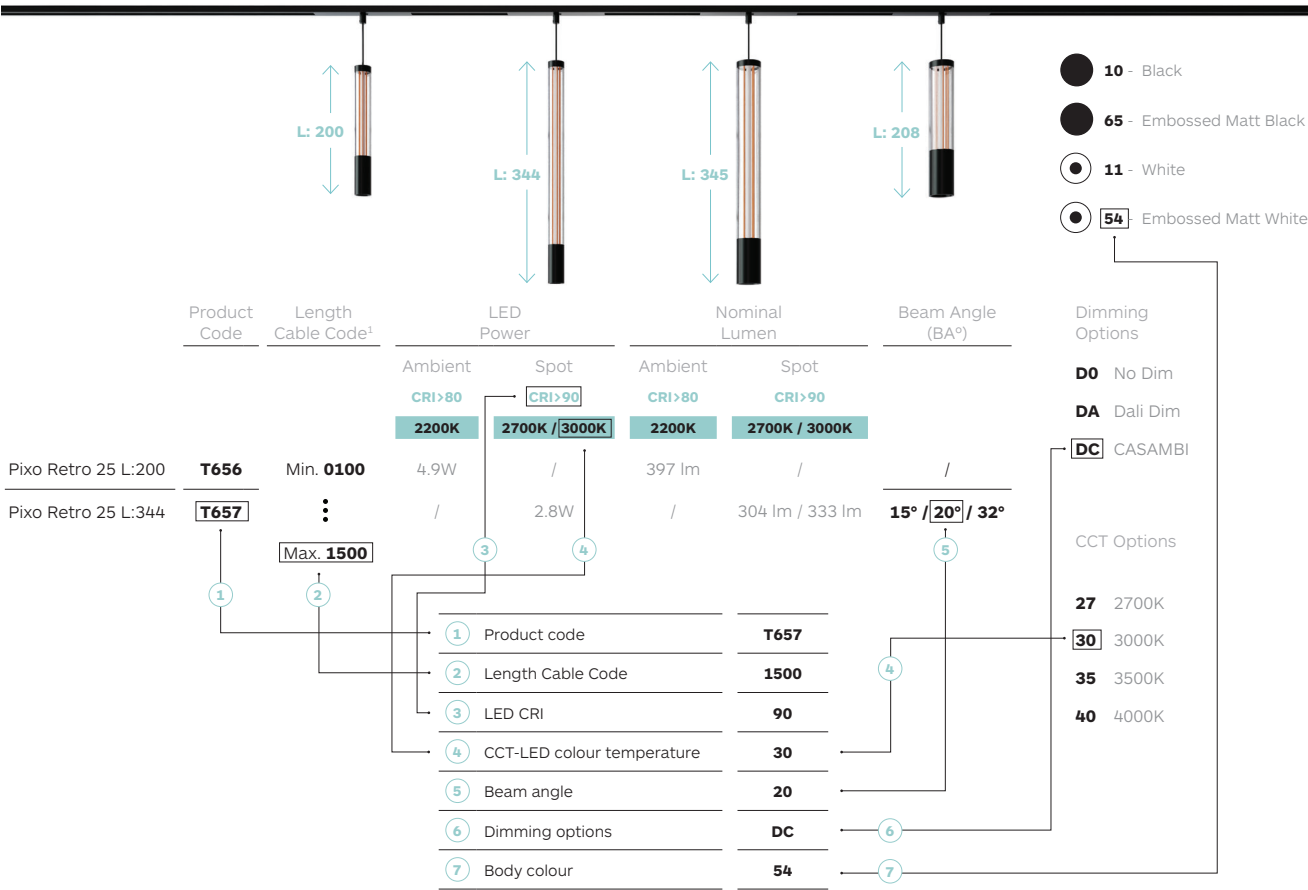


Code System for TikTok Products

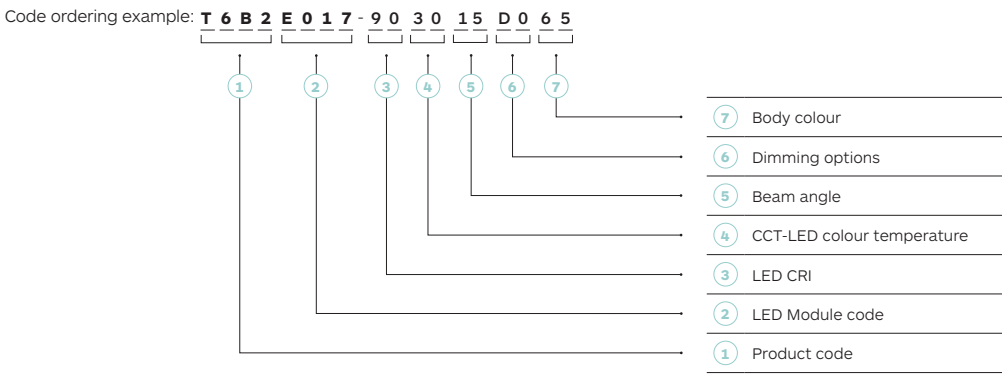


LED CRI	CCT-LED Colour temperature	Dimming Options	Body Colour
80 CRI > 80	27 Warm White 2700K	D0 No dimming	1Y Embossed Matt Total White RAL (9016)
90 CRI > 90	30 Warm White 3000K	DA Dali Dim	54 Embossed Matt White RAL (9016)
93 CRI > 93	35 Warm White 3500K	DC CASAMBI	65 Embossed Matt Black RAL (9017)
97 CRI > 97	40 Neutral White 4000K	DN On-board Dimmer	27 Chrome Polished
98 CRI > 98	TW Tuneable White 2700K - 5700K		

How to order

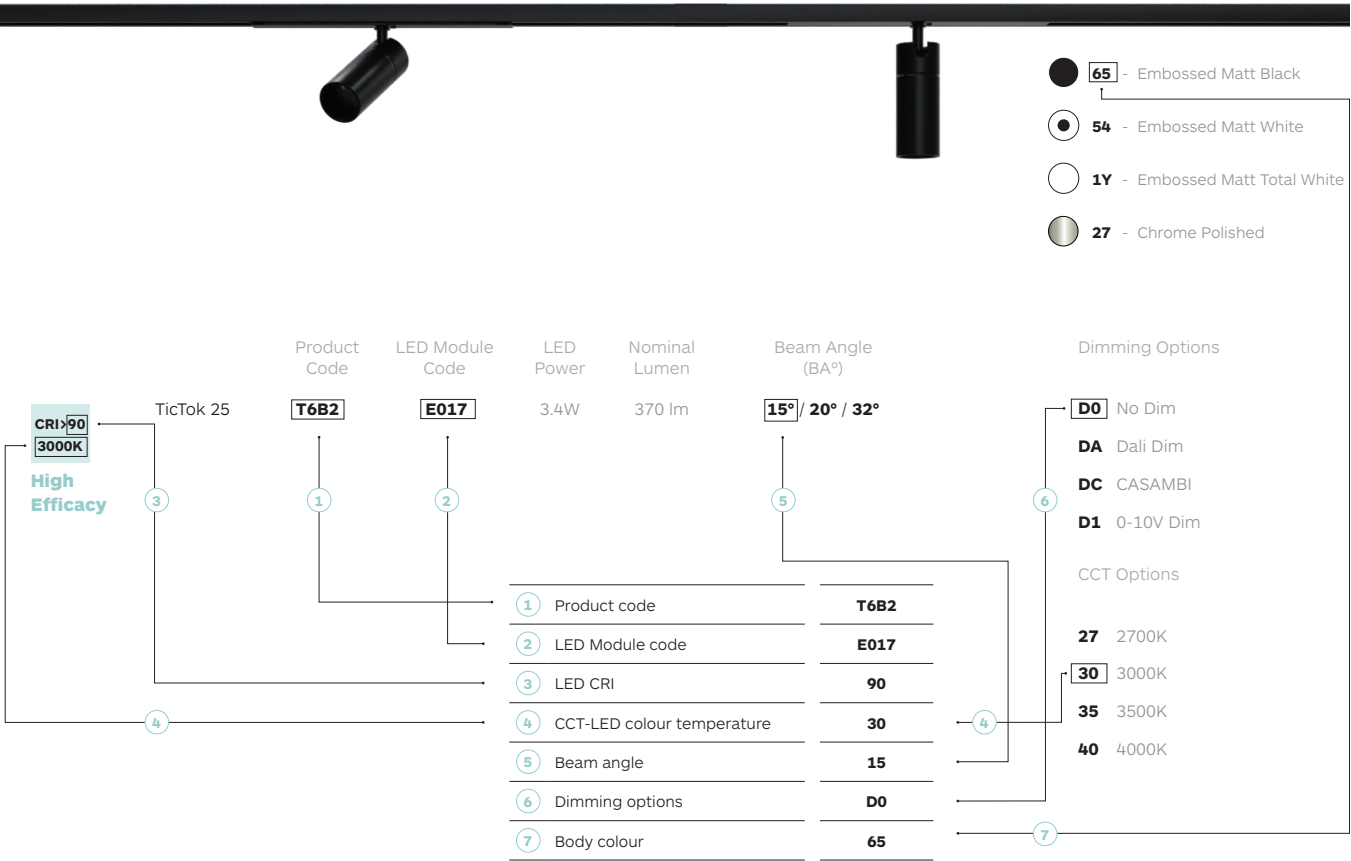


Code System for Viivo Products

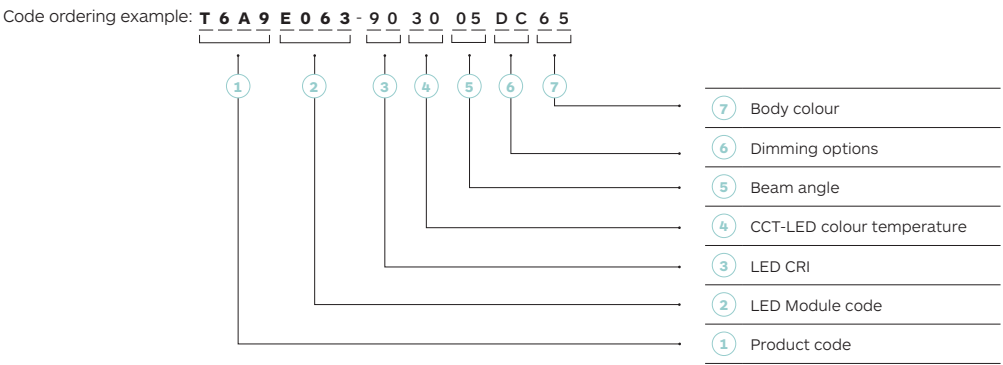

LED CRI	CCT-LED Colour temperature	Dimming Options	Body Colour
80 CRI > 80	27 Warm White 2700K	D0 No dimming	1Y Embossed Matt Total White RAL (9016)
90 CRI > 90	30 Warm White 3000K	DA Dali Dim	54 Embossed Matt White RAL (9016)
93 CRI > 93	35 Warm White 3500K	DC CASAMBI	65 Embossed Matt Black RAL (9017)
97 CRI > 97	40 Neutral White 4000K	DN On-board Dimmer	27 Chrome Polished
98 CRI > 98	TW Tuneable White 2700K - 5700K		1A Chrome Gold
			79 Brushed Aluminium
			3G Brushed Brass
			3H Antique Brass
			3J Blackened Brass

How to order

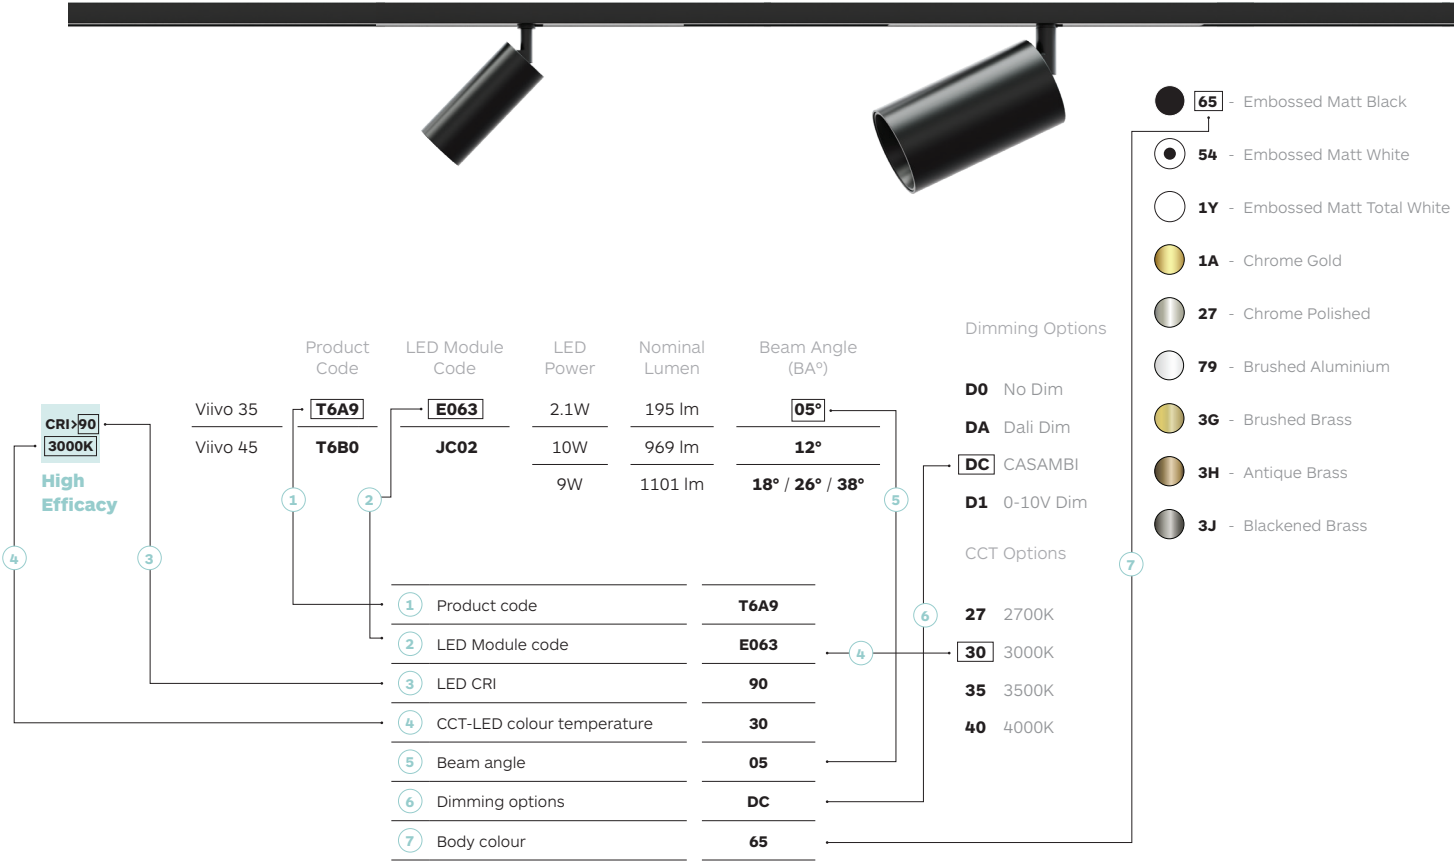

Global presence

Celebrating over 50 years of vision, dedication and innovation, formalighting's versatile and high-quality product offerings extends internationally via our headquarters in Hong Kong, London, Milan and Shanghai. Our well chosen and selected partners as well as our affiliated international offices broaden our global presence further in markets such as USA, Australia, Japan, South East Asia, India and the Middle East.

Through our commitment to growth and investment within formalighting's professional team, infrastructure and product ranges, we are able to provide increasing service to our global retail and hospitality clients as well as lighting designers and specifiers strengthening our position as a leading international supplier of innovative architectural lighting solutions and systems.

With over 50 years' experience in designing and manufacturing architectural lighting, formalighting's comprehensive portfolio offers a competitive range of European designed and expertly engineered products that carry CB, CE, CCC and UL certifications.

Furthermore formalighting's latest award-winning motorized range of track, pendant, and recessed fixtures, featuring remote-controlled adjustable pan and tilt, dim, dim to warm, tuneable white and beam shaping lens, are available worldwide incorporating the latest, most advanced lighting technologies.

MILAN

EUROPE HEADQUARTERS

Tel (+39) 02 9354 0300
Fax (+39) 02 9343 5117
E- mail info-europe@formalighting.com

HONG KONG

ASIA HEADQUARTERS

Tel (+ 852) 2516 6500
Fax (+ 852) 2516 6525
E- mail info-asia@formalighting.com

NEW YORK

LOCAL SALES OFFICE

E- mail info-us@formalighting.com

SHANGHAI

LOCAL SALES OFFICE

E- mail info-china@formalighting.com

LONDON

LOCAL SALES OFFICE

E- mail info-uk@formalighting.com

AUSTRALIA

LOCAL SALES OFFICE

Tel (+61) 488 567 388
E- mail info-australia@formalighting.com

INDIA

LOCAL SALES OFFICE

Tel (+91) 9686351257
E- mail info-india@formalighting.com

formalighting is constantly developing and improving its products therefore all information, drawings illustrations, specifications, photometric values in this catalogue are indicative and shall not form part of any commitment by our company that reserves the right to change specifications without prior notification or public announcement.

Technical information on the installation-instruction has precedence over the information in the catalogue.

Our general terms and conditions shall apply notwithstanding any stipulation on the contrary to all the orders and agreement with formalighting. You can obtain a copy of these conditions on demand.

Publication date: October 2026.
©Copyright formalighting

With thanks to all contributors for the realization of this catalogue.

Designed by formalighting's Graphic Design Department.

No part of this catalogue may be copied without written authorization of formalighting.

formalighting

MILAN

-

LONDON

-

USA

-

HONG KONG

-

SHANGHAI

-

INDIA