formalighting

Zero Framing Projector Series

2026

Zero Framing Projector Series

Zero Framing Projector

Collected Light Exhibition. Milan 2023
Cascina Cuccagna - formalighting's Demo Room featuring the high performance Zero Framing Projector 85 and Zero Framing Projector 38.

The hero of formalighting's track-mounted range for museums and galleries, for the professional illumination of objects, with high precision optics and sharp outlines.

An advanced multifunctional projector with built-in bidirectional zooming lens with sharpness adjustability and lens rotation. Also compatible with Gobo Insertion.

Available for EURO Track, Low Voltage Track, Semi-Recessed, and Surface Mounted versions.


Zero Projector Lighting Effect

Precision light contouring



Image Projection

CCT Options

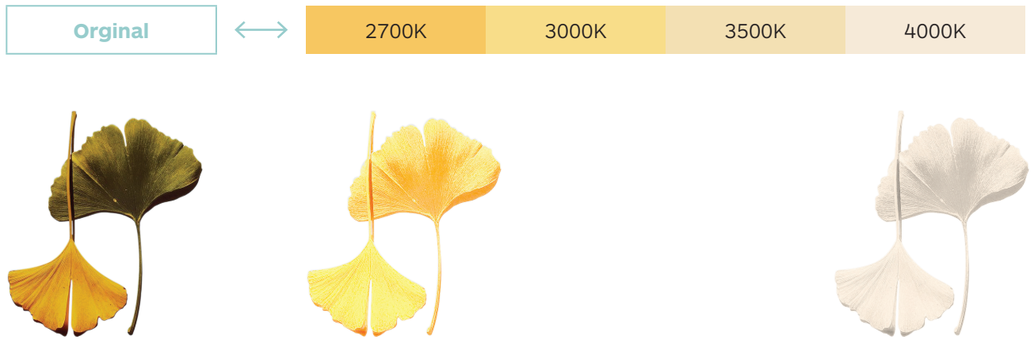

Custom Graphics Projection





Contour Spotlights


Create perfect displays of art in museums and galleries




Our Zero Framing Projectors allow you to create beautiful lighting effects for your artwork.


Formalighting has created a solution with its contour spotlights. These allow curators and lighting designers to cast precise beams of light that highlight exhibits in galleries and museums while leaving the background in darkness for a magical effect. Unlike traditional projectors, which are limited to a single lighting style, our spotlights offer flexibility. You can easily switch from a framing light to a spotlight with a round beam without any tools.

Framing Light Distribution

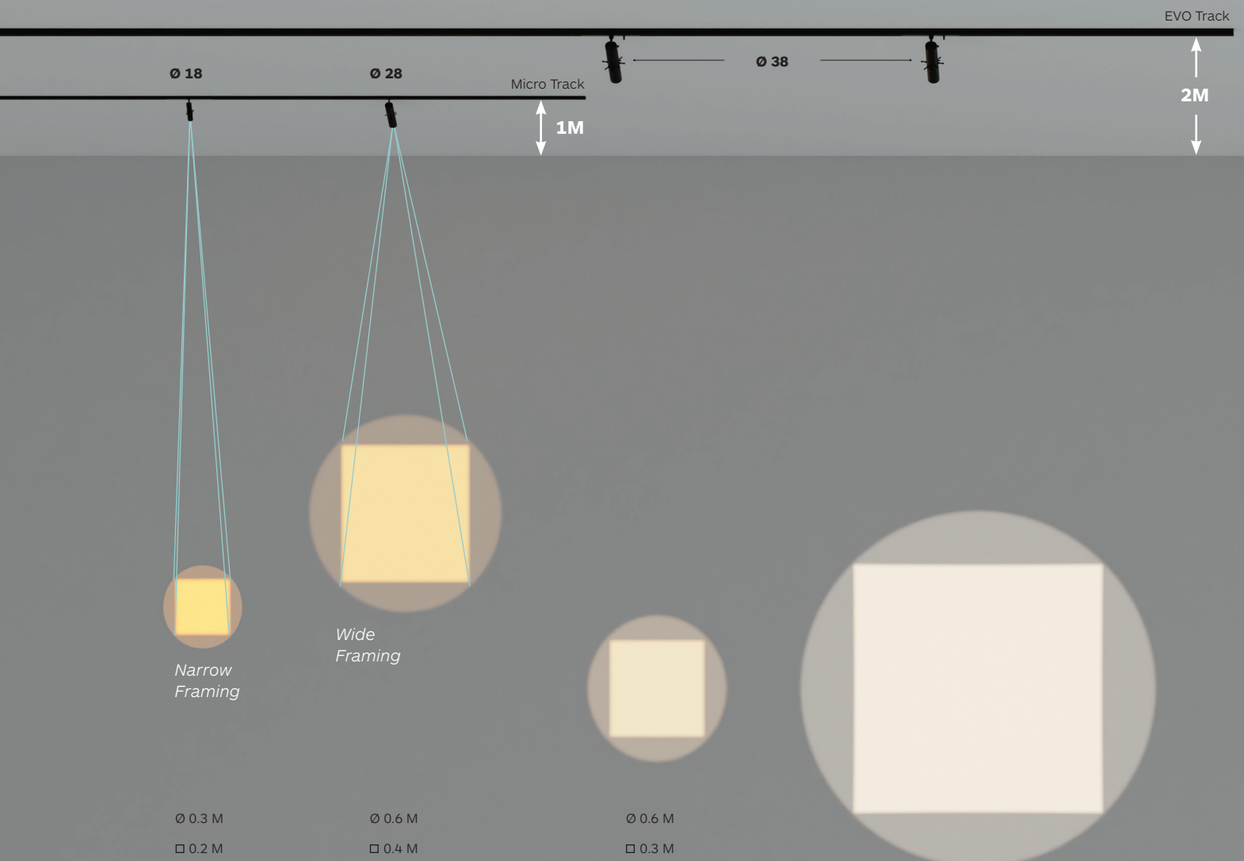

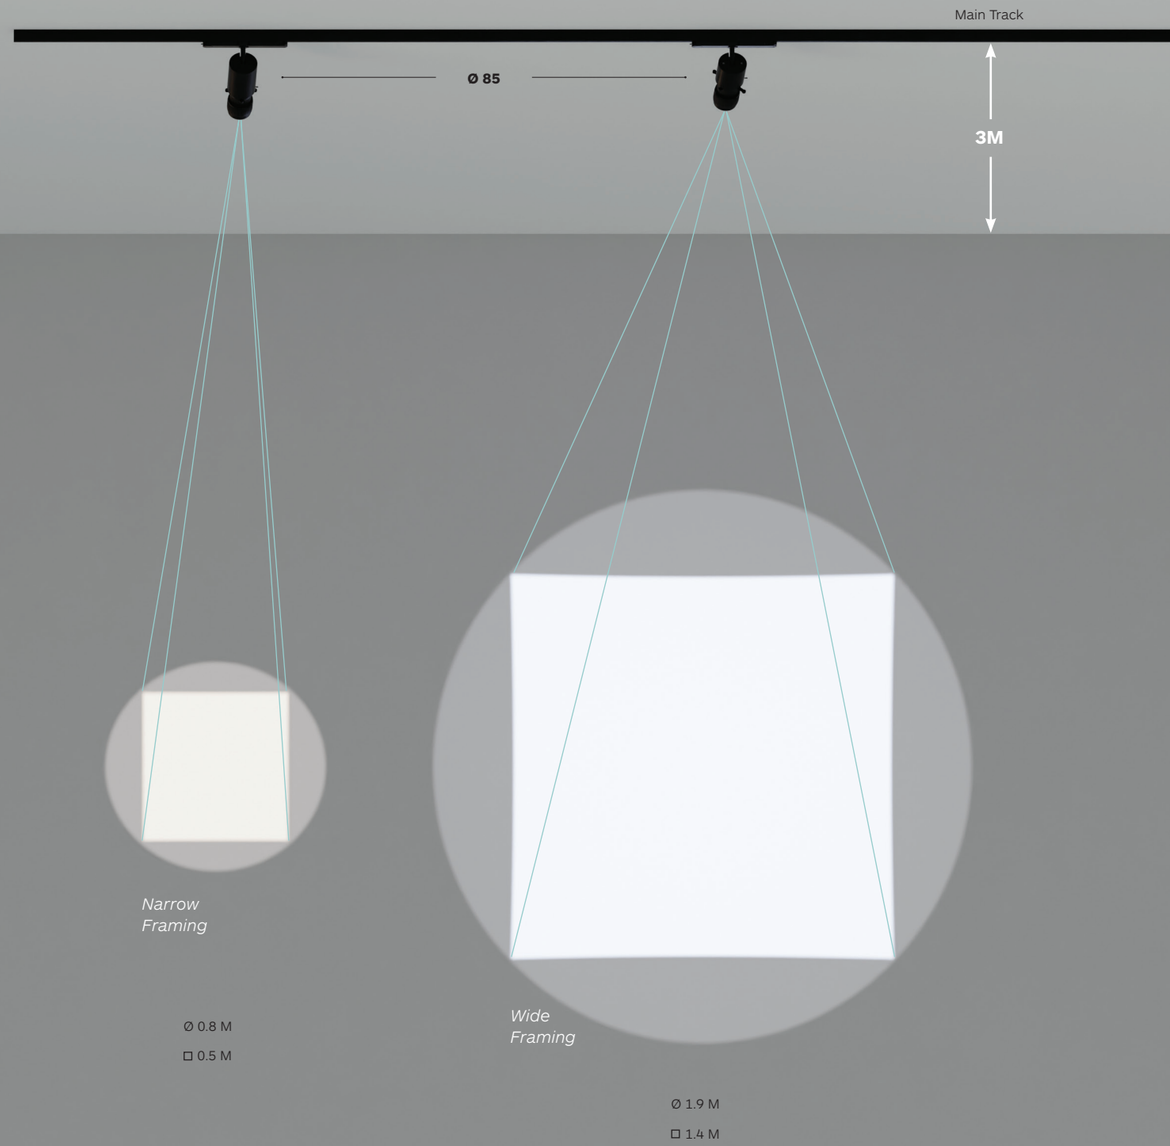

Projection Spacing

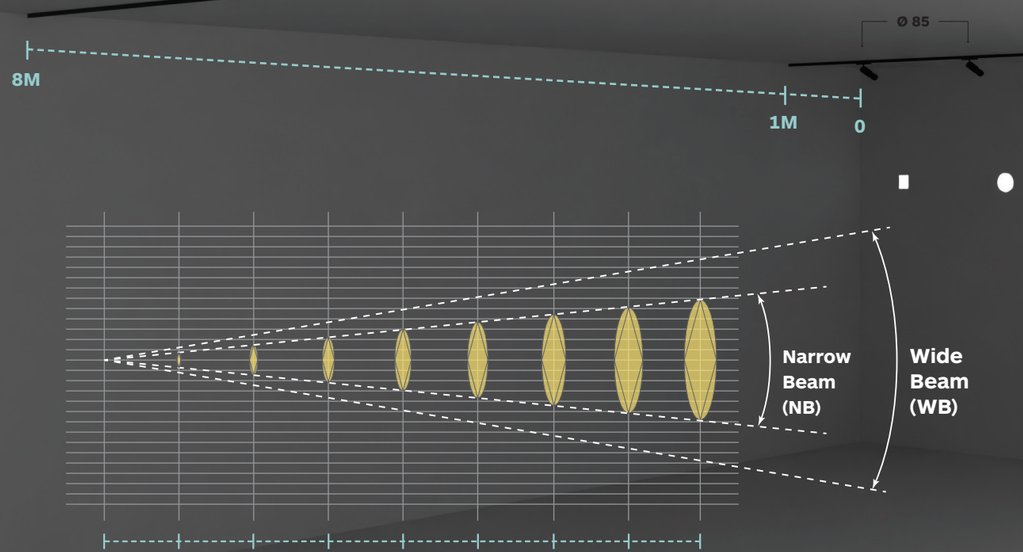





Refer to this guideline to determine the appropriate circle of light diameter, light placement, or lens strength.

Zero Framing Projector 18

Zero Framing Projector 28



Zero Framing Projector 38



			Projection Distance (M)							
			1M	2M	3M	4M	5M	6M	7M	8M
Zero Framing Projector 18 BS: Beam Shaping	**NB** : 15°	Circular Spot Diameter (M)	Ø 0.3	Ø 0.6	Ø 0.9	Ø 1.2	-	-	-	-
	WB : 33°		Ø 0.6	Ø 1.3	Ø 1.8	Ø 2.5	-	-	-	-
Beam Angle: 15° - 33°	**NB** : 15°	Square Spot Side Length (M)	L 0.2	L 0.3	L 0.6	L 0.8	-	-	-	-
	WB : 33°		L 0.4	L 0.9	L 1.3	L 1.7	-	-	-	-
Zero Framing Projector 28 BS: Beam Shaping	**NB** : 11°	Circular Spot Diameter (M)	Ø 0.3	Ø 0.5	Ø 0.8	Ø 1.0	Ø 1.2	Ø 1.5	Ø 1.7	-
	WB : 32°		Ø 0.6	Ø 1.3	Ø 1.9	Ø 2.4	Ø 3.2	Ø 3.8	Ø 4.5	-
Beam Angle: 11° - 32°	**NB** : 11°	Square Spot Side Length (M)	L 0.2	L 0.3	L 0.5	L 0.7	L 0.9	L 1.0	L 1.2	-
	WB : 32°		L 0.4	L 0.9	L 1.4	L 1.8	L 2.3	L 2.7	L 3.2	-
Zero Framing Projector 38 BS: Beam Shaping	**NB** : 14°	Circular Spot Diameter (M)	Ø 0.3	Ø 0.6	Ø 0.9	Ø 1.2	Ø 1.5	Ø 1.8	Ø 2.2	Ø 2.5
	WB : 35°		Ø 0.6	Ø 1.2	Ø 1.8	Ø 2.4	Ø 2.9	Ø 3.5	Ø 4.1	Ø 4.7
Beam Angle: 14° - 35°	**NB** : 14°	Square Spot Side Length (M)	L 0.2	L 0.3	L 0.6	L 0.8	L 1.0	L 1.3	L 1.6	L 1.8
	WB : 35°		L 0.4	L 0.9	L 1.3	L 1.6	L 2.1	L 2.5	L 2.9	L 3.3

Zero Framing Projector 85





Main Track: 6640
Surface: 1462

Main Track: 6641
Surface: 1463

			Projection Distance (M)							
			1M	2M	3M	4M	5M	6M	7M	8M
BS: Beam Shaping	**NB** : 13°	Circular Spot Diameter (M)	Ø 0.3	Ø 0.5	Ø 0.8	Ø 1.0	Ø 1.3	Ø 1.5	Ø 1.8	Ø 2.0
Beam Angle: 13° - 23°	**WB** : 23°		Ø 0.4	Ø 0.9	Ø 1.3	Ø 1.7	Ø 2.2	Ø 2.6	Ø 3.0	Ø 3.4
	NB : 13°	Square Spot Side Length (M)	L 0.2	L 0.4	L 0.5	L 0.7	L 0.9	L 1.1	L 1.3	L 1.4
	WB : 23°		L 0.3	L 0.6	L 0.9	L 1.2	L 1.5	L 1.8	L 2.1	L 2.4
BW: Beam Wide	**NB** : 23°	Circular Spot Diameter (M)	Ø 0.4	Ø 0.8	Ø 1.2	Ø 1.6	Ø 2.0	Ø 2.4	Ø 2.8	Ø 3.2
Beam Angle: 23° - 35°	**WB** : 35°		Ø 0.6	Ø 1.3	Ø 1.9	Ø 2.6	Ø 3.2	Ø 3.9	Ø 4.5	Ø 5.2
	NB : 23°	Square Spot Side Length (M)	L 0.3	L 0.6	L 0.8	L 1.1	L 1.4	L 1.7	L 2.0	L 2.3
	WB : 35°		L 0.5	L 0.9	L 1.4	L 1.8	L 2.3	L 2.8	L 3.2	L 3.7

formalighting

Optical Accessory Gobo Film

A zero-framing projector, a gobo, and a projection surface are all required for logo projection. The gobo is a little template film that displays a customized logo or other creative image.

The gobo film is inserted into the Zero Framing projector, and the picture emerges on the ideal surface. Choose the appropriate gobo for your design and projector to achieve a clear image at the correct size and brightness.



Gobo Film







Gobo Film

available for 4 sizes

1. Zero Framing Projector 85  **2F29**

2. Zero Framing Projector 38  **2G24**

3. Zero Framing Projector 28  **2G92**

4. Zero Framing Projector 18  **2G91**

PRODUCTS INDEX

Recessed & Semi-Recessed



Ø 38

P. 18



Ø 18

Ø 28

Ø 38

P. 18

Surface Mounted



Ø 18

Ø 28

Ø 38

P. 30 - 33



Ø 85

P. 30

Main Voltage Track




Ø 38

P. 20



Ø 85

P. 20



Ø 85

P. 20

EVO Track

48V



Ø 28

Ø 38


P. 22



MOTOLUX PRO

Ø 38

P. 24



Ø 38

P. 22

Micro Track

48V



Ø 18


Ø 28

P. 26



Mini Track

24V

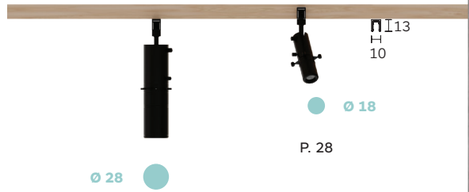

Ø 18

P. 28

Ø 28

P. 28

formalighting

Zero
Framing Projector

Semi Recessed & Recessed

Advanced, multi-functional LED semi-recessed and recessed mounted projector. With a built-in bidirectional zooming lens with sharpness adjustability, and lens rotation.

Adjustable shutters to re-frame the beam to the desired size and shape. Compatible with Gobo insertion for logo. High-precision optics for sharp outlines and high degree of lighting uniformity.

For complete code ordering information, please see page 37.

LED Sources:

High Rendering:
CRI: 97 | CCT: 2700K, 3000K, 3500K, 4000K.

Accessories:

- Gobo Film, see page 15 for details
Contact us for custom-made logo projection lens.

○ **10** - Black

● **11** - White



Zero Framing Projector
Semi-Recessed & Recessed

IP20 | 350° | 90° | 41°

10 | 11











Ø 25 mm
[Ø 0.98"]

RR72




Ø 30 mm
[Ø 1.18"]

RR73




Ø 60 mm
[Ø 2.36"]


RR56



Ø 185 mm
[Ø 7.28"]

RR71

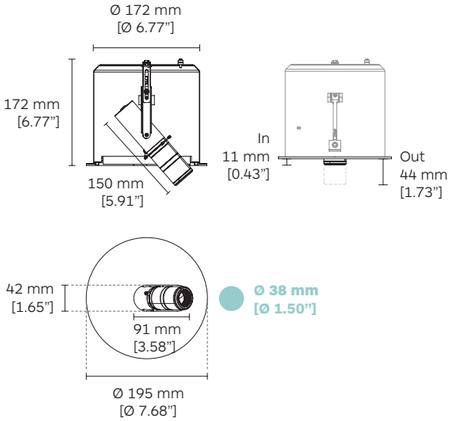



		Product Code	Light Source Code	LED Power	Nominal Lumen	Beam Angle (BA°)
CRI>97 3000K High Rendering	Zero Framing Projector 18	**RR72** ●	**BC52**	2.4W	205 lm	**BS** (15° - 33°)
	Zero Framing Projector 28	**RR73** ●	**BC53**	4.8W	470 lm	**BS** (11° - 32°)
	Zero Framing Projector 38	**RR56** ●	**BC42**	9.7W	922 lm	**BS** (14° - 35°)
		RR71 ●				

Dimming Options	
ND	CC (DALI / 0-10V)
24	24V No Dim
D0*	No Dim
DC*	CASAMBI
DA*	Dali Dim
D1*	0-10V Dim
DP*	Phase Dim

CCT Options	
27	2700K
30	3000K
35	3500K
40	4000K

** Dimming Options Dali Dim **(DA)**, CASAMBI **(DC)**, No Dim **(D0)**, 0-10V Dim **(D1)** and Phase Dim **(DP)** are available for Zero Framing Projector 38 only.*
***BS**: Beam Shaping.*

formalighting

Zero Framing Projector

Track

10 - Black

11 - White

Advanced, multi-functional LED track mounted projector, tiltable vertically 0°-90° and rotatable horizontally 350°. With built-in bidirectional zooming lens with sharpness adjustability, and lens rotation.

Adjustable shutters to re-frame the beam to the desired size and shape (circle, square/ rectangle, or irregular four-sided shapes). Compatible with Gobo insertion for logo.

High-precision optics for sharp outlines and high degree of lighting uniformity.

For complete code ordering information, please see page 37.

LED Sources:

High Rendering:
CRI: 97 | CCT: 2700K, 3000K, 3500K, 4000K.

Accessories:

- Gobo Film, see page 15 for details


Contact us for custom-made logo projection lens.

Zero Framing Projector Track


IP20 | 90° | 350°




6643

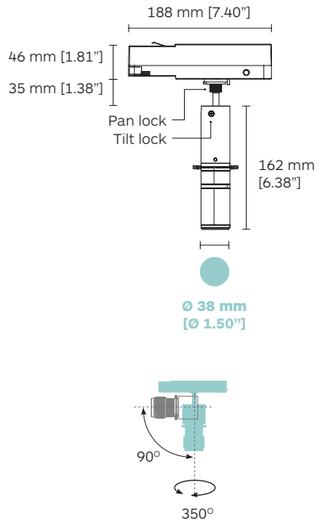

6640

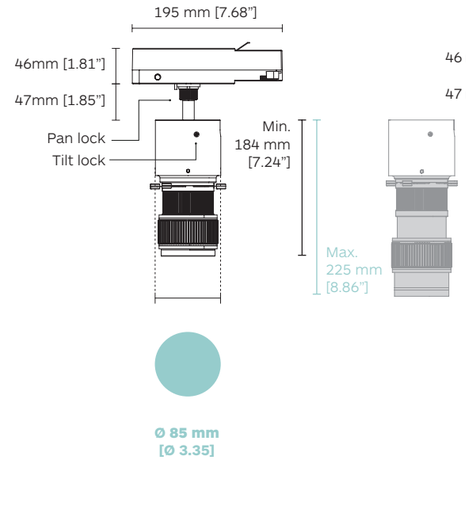

6641

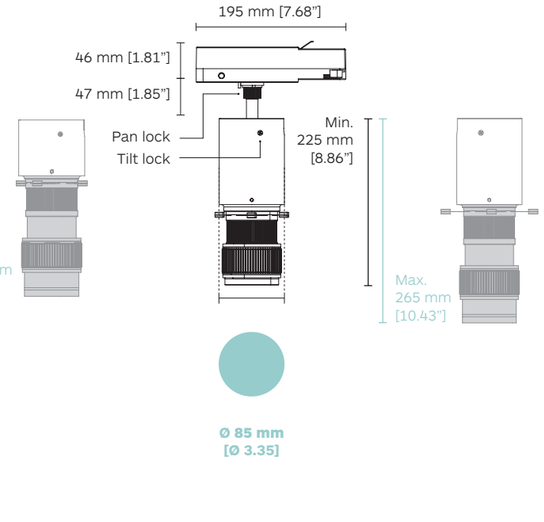

		Product Code	Light Source Code	LED Power	Nominal Lumen	Beam Angle (BA°)	Dimming Options	CCT Options
CRI>97 3000K High Rendering	Zero Framing Projector 38	**6643**	**BC42**	9.6W	922 lm	**BS** (14° - 35°)	**D0** No Dim	**27** 2700K
	Zero Framing Projector 85	**6640**	**BC39**	18W	1937 lm	**BS** (13° - 23°)	**DA** Dali Dim	**30** 3000K
						BW (23° - 35°)	**DC** CASAMBI	**35** 3500K
		6641	**BC39**	26W	2656 lm	**BS** (13° - 23°)	**DN** On board Dim	**40** 4000K
						BW (23° - 35°)		

***BS**: Beam Shaping; **BW**: Beam Wide.*

formalighting

Zero Framing Projector

EVO 48V Track

10 - Black

11 - White

LED Sources:

High Rendering:
CRI: 97 | CCT: 2700K, 3000K, 3500K, 4000K

Accessories:

- Gobo Film, see page 15 for details.

Contact us for custom-made logo projection lens.

Zero 38 framing projector is an advanced, multi-functional EVO 48V track-mounted projector, tiltable vertically 0°-90° and rotatable horizontally 360°. With built-in bidirectional zooming lens with sharpness adjustability, and lens rotation. Available in regular and long arm version for deep recessed and pendant EVO 48V track.

Fully adjustable shutters to reframe the beam to the desired size and shape (circle, square/rectangle, or irregular four-sided shapes). Compatible with Gobo insertion for logo.

High-precision optics for sharp outlines and a high degree of lighting uniformity.

For complete code ordering information, please see page 37.

Zero Framing Projector
EVO Track


48V | CE | SCE | IP20 | 90° | 360°

10 | 11


Regular Arm + EVO Regular Track




96H7




96A4




Long Arm + EVO Deep Track

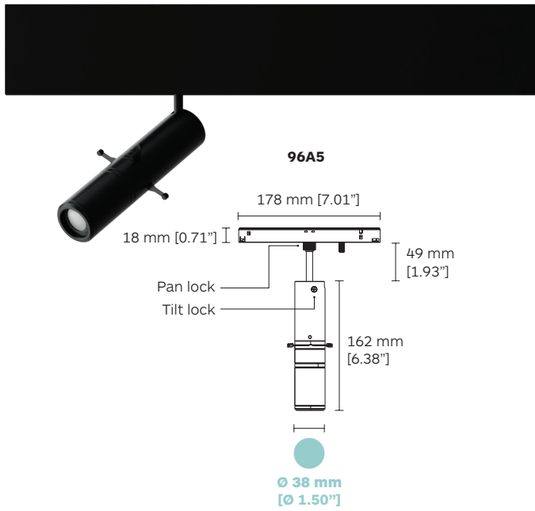

96A5



Regular Arm + Regular Track



Long Arm + Deep Track

		Product Code	Light Source Code	LED Power	Nominal Lumen	Beam Angle (BA°)	Dimming Options		CCT Options	
CRI>97 3000K	Zero Framing Projector 28	**96H7**	**BC53**	4.8W	470 lm	**BS** (11° - 32°)	**D0**	No Dim	**27**	2700K
	Zero Framing Projector 38	**96A4**	**BC42**	9.6W	922 lm	**BS** (14° - 35°)	**DC**	CASAMBI	**30**	3000K
High Rendering	Zero Framing Projector 38 Long Arm	**96A5**					**DA**	Dali Dim	**35**	3500K
							DN	On board Dim	**40**	4000K

***BS**: Beam Shaping.*

formalighting

Moto-Zero Framing Projector
PRO

Moto-Zero Framing Projector is an advanced, multi-functional luminaire designed for the EVO track system. Powered by CASAMBI™ control technology, it features integrated memory that allows the fixture to instantly recall pre-recorded settings for position, color temperature, and dimming levels via the app.

Precision step motors drive smooth 90° vertical tilt and 330° horizontal pan movement. The built-in bidirectional zooming lens includes adjustable sharpness and full lens rotation. Fully customizable shutters enable precise beam reframing into any desired size or shape—including circles, squares, rectangles, or irregular four-sided forms.

The unit is also compatible with gobo insertion for projecting custom logos or patterns.

For complete code ordering information, please see page 37.

10 - Black

11 - White

LED Sources:

High Rendering:
CRI: 95 | CCT: Tuneable White from 2700K - 5700K.
CRI: 97 | CCT: 2700K, 3000K, 3500K, 4000K.

Accessories:

- Gobo Film, see page 15 for details


Contact us for custom-made logo projection lens.

Moto-Zero Framing Projector 38
PRO

48V | IP20 | 330° | 90°

10 | 11



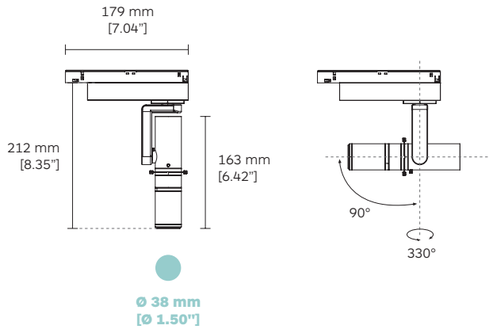

		Product Code	Light Source Code	LED Power	Nominal Lumen	Beam Angle (BA°)	Dimming Options	CCT Options
CRI>95 3000K High Rendering	Moto-Zero Framing Projector 38 PRO	**M922**	**BD11**	8W	635 lm	**BS** (14° - 35°)	**DC** CASAMBI **DA** Dali Dim **D1** 0-10V Dim	**27** 2700K **30** 3000K **35** 3500K **40** 4000K **TI** [1] 2700K - 5700K
CRI>97 3000K High Rendering	Moto-Zero Framing Projector 38 PRO	**M922**	**BC42**	9.7W	922 lm			

[1] CCT Option **TI** available for CRI 95 only.

BS: Beam Shaping.

formalighting

Zero Framing Projector

Micro Track

Advanced, multi-functional LED track-mounted projector, tiltable vertically 0°-90° and rotatable horizontally 350°. With built-in bidirectional zooming lens with sharpness adjustability, and lens rotation. Adjustable shutters to re-frame the beam to the desired size and shape (circle, square/rectangle, or irregular four-sided shapes).

Compatible with gobo insertion for the logo. High-precision optics for sharp outlines and high degree of lighting uniformity.

For complete code ordering information, please see page 37.

LED Sources:

High Rendering:
CRI: 97 | CCT: 2700K, 3000K, 3500K, 4000K.

Accessories:

- Gobo Film, see page 15 for details.

Contact us for custom-made logo projection lens.

10 - Black


11 - White




Zero Framing Projector
Micro Track

48V | CE | IP20 | 90° | 350°

10 | 11

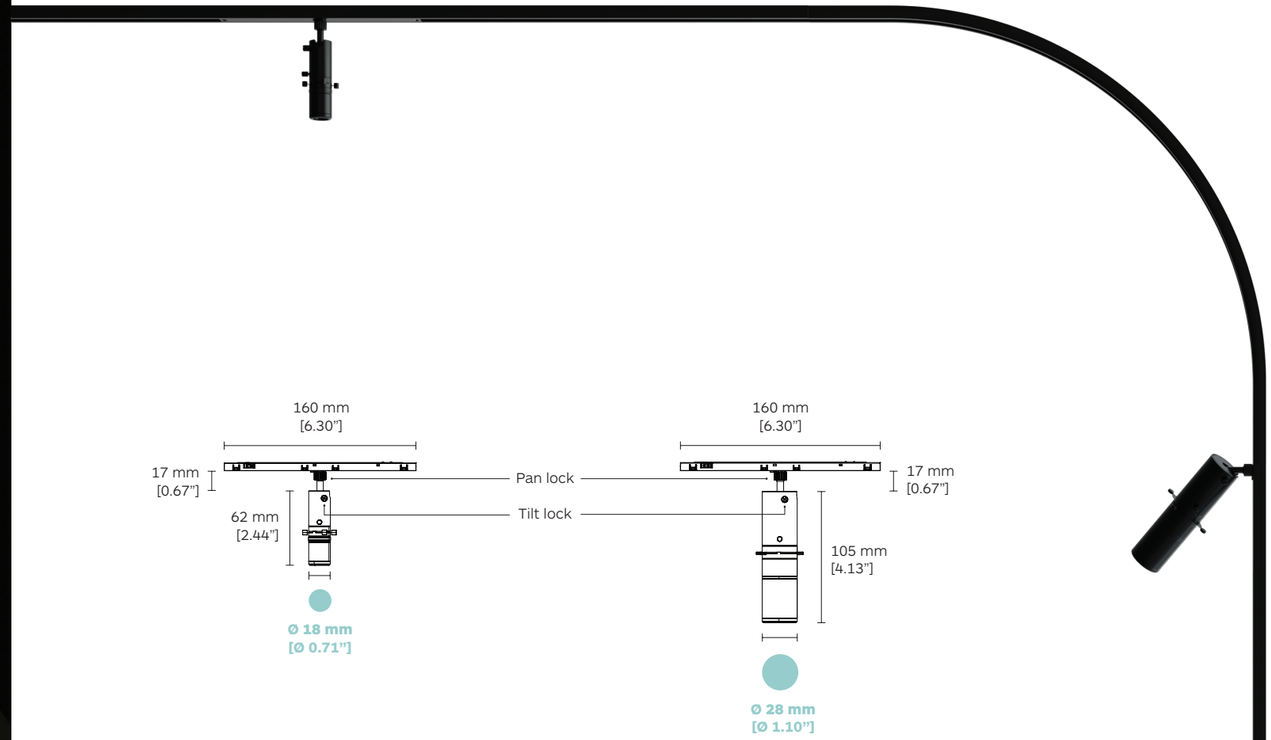



		Product Code	Light Source Code	LED Power	Nominal Lumen	Beam Angle (BA°)
CRI>97 3000K High Rendering	Zero Framing Projector 18	**T674**	**BC52**	2.4W	205 lm	**BS** (15° - 33°)
	Zero Framing Projector 28	**T650**	**BC53**	4.8W	470 lm	**BS** (11° - 32°)

Dimming Options

- **D0** No Dim
- **DA** Dali Dim
- **DC** CASAMBI

CCT Options

- **27** 2700K
- **30** 3000K
- **35** 3500K
- **40** 4000K

***BS**: Beam Shaping.*

formalighting

Zero
Framing Projector

Mini Track

10 - Black

11 - White



For galleries and museums, the Zero Framing Projectors 18 & 28 are professional micro spotlights that guarantee exception illumination for even the smallest of artefacts.

Designed to suit a range of needs, Zero Framing Projectors 18 & 28 are available for 24V mini track, tiltable vertically 0°-90° and rotatable horizontally 330°. With built-in bidirectional zooming lens with sharpness adjustability, and lens rotation. Adjustable shutters to re-frame the beam to the desired size and shape.

Compatible with Gobo insertion for logo. High-precision optics for sharp outlines and a high degree of lighting uniformity.

For complete code ordering information, please see page 37.

LED Sources:

High Rendering:
CRI: 97 | CCT: 2700K, 3000K, 3500K, 4000K.

Accessories:

- Gobo Film, see page 15 for details.


Contact us for custom-made logo projection lens.


Zero Framing Projector
Mini Track

24V | CE | IP20 | 90° | 350°

10 **11**



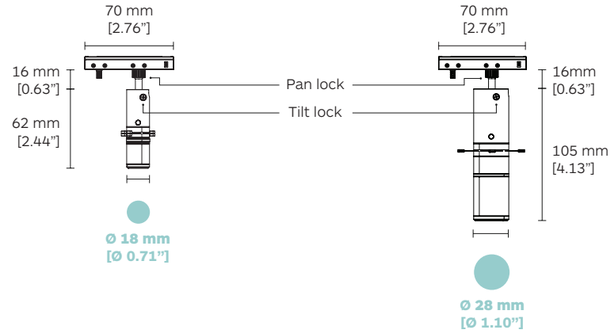





		Product Code	Light Source Code	LED Power	Nominal Lumen	Beam Angle (BA°)	Dimming Options	CCT Options
CRI>97 3000K High Rendering	Zero Framing Projector 18	**G96C**	**BC52**	2.4W	205 lm	**BS** (15° - 33°)	**D0** No Dim	**27** 2700K
	Zero Framing Projector 28	**G96D**	**BC53**	4.8W	470 lm	**BS** (11° - 32°)	**D1** 0-10V Dim	**30** 3000K
								35 3500K
								40 4000K

***BS**: Beam Shaping.*

formalighting

Zero
Framing Projector

Surface 38 | 85

10 - Black

11 - White



Advanced, multi-functional LED surface-mounted projector, tiltable vertically 0°-90° and rotatable horizontally 350°. With built-in bidirectional zooming lens with sharpness adjustability, and lens rotation. Available in 38 mm and 85 mm. Adjustable shutters allow you to re-frame the beam to the desired size and shape.

Compatible with gobo insertion for the logo. High-precision optics for sharp outlines and a high degree of lighting uniformity.

For complete code ordering information, please see page 37.

LED Sources:

High Rendering:
CRI: 97 | CCT: 2700K, 3000K, 3500K, 4000K.

Accessories:

- Gobo Film, see page 15 for details.

Contact us for custom-made logo projection lens.

Zero Framing Projector
38 & 85 Surface

IP20 | 350° | 90°


10 | 11









1466

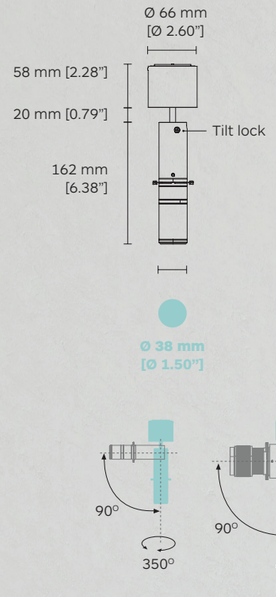

1462

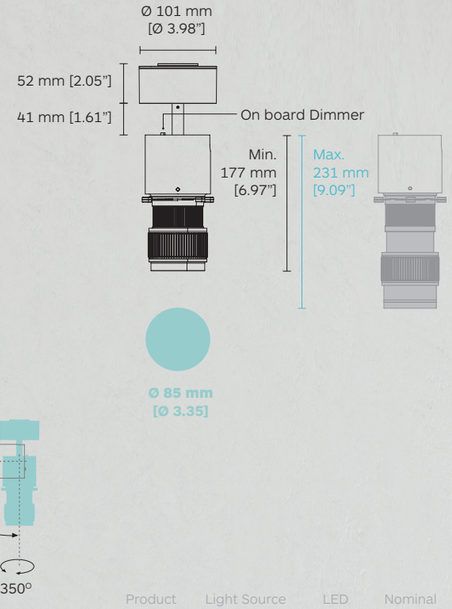

1463

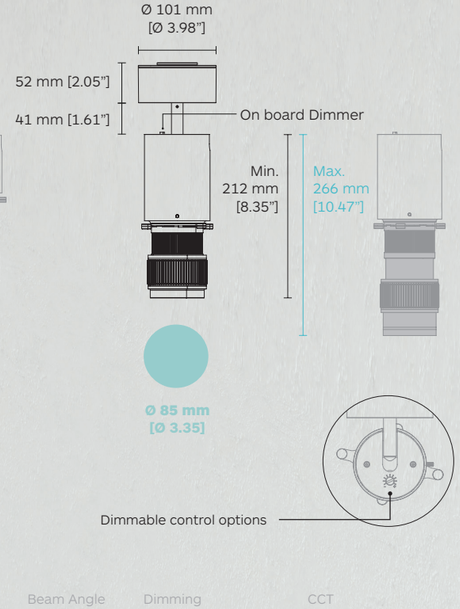

Dimmable control options

		Product Code	Light Source Code	LED Power	Nominal Lumen	Beam Angle (BA°)	Dimming Options	CCT Options
CRI>97 3000K High Rendering	Zero Framing Projector 38	**1466**	**BC42**	9.6W	922 lm	**BS** (14° - 35°)	**D0** No Dim	**27** 2700K
	Zero Framing Projector 85	**1462**	**BC39**	18W	1937 lm	**BS** (13° - 23°)	**DC** CASAMBI	**30** 3000K
						BW (23° - 35°)	**DA** Dali Dim	**35** 3500K
		1463	**BC39**	26W	2656 lm	**BS** (13° - 23°)	**DN*** On board Dim	**40** 4000K
						BW (23° - 35°)		

** Dimming Options On board Dim **(DN)** is available for Zero Framming Projector 85 only.*
***BS**: Beam Shaping; **BW**: Beam Wide.*

formalighting

Zero
Framing Projector

Surface 18 | 28

The compact surface-mounted projector works with a low-voltage power supply. Tiltable vertically 0°-90° and rotatable horizontally 350°. With a built-in bidirectional zooming lens with sharpness adjustability, and lens rotation. Available in 28 mm and 18 mm. Adjustable shutters allow you to re-frame the beam to the desired size and shape.

Compatible with gobo insertion for the logo. High-precision optics for sharp outlines and a high degree of lighting uniformity. An ultra-compact design ideal for showcase and display lighting applications.

For complete code ordering information, please see page 37.

LED Sources:

High Rendering:
CRI: 97 | CCT: 2700K, 3000K, 3500K, 4000K.

Accessories:

- Gobo Film, see page 15 for details.

Contact us for custom-made logo projection lens.


○ **10** - Black


◉ **11** - White

Zero Framing Projector
18 & 28 Surface

24V | CE | IP20 | 90° | 350°

10 | 11

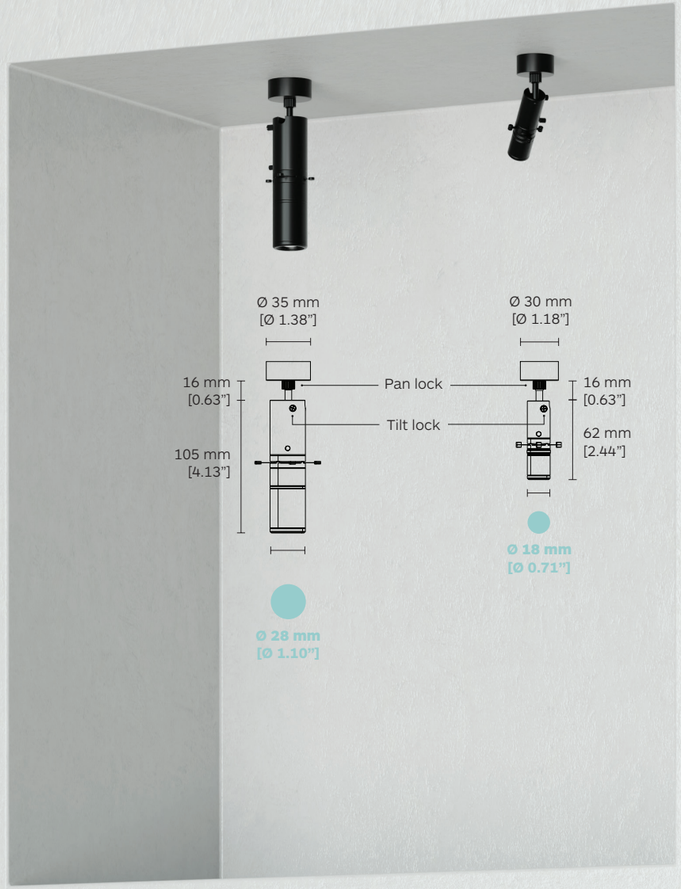



		Product Code	Light Source Code	LED Power	Nominal Lumen	Beam Angle (BA°)	Dimming Options	CCT Options
CRI>97 3000K High Rendering	Zero Framing Projector 18	**1491**	**BC52**	2.4W	205 lm	**BS** (15° - 33°)	**ND** CC (DALI / 0-10V)	**27** 2700K
	Zero Framing Projector 28	**1492**	**BC53**	4.8W	470 lm	**BS** (11° - 32°)	**24** 24V No Dim	**30** 3000K
								35 3500K
								40 4000K

***BS**: Beam Shaping.*

formalighting

Symbols & Icons
Code system
Global presence

Symbols & Icons

Trim Round

Round ceiling cut

European Economic Area
Declares that the product complies with all applicable European Union safety, health, and environmental protection requirements.

Canada US
Indicates that the product has been tested and meets Canadian and North American standards requirements standards for safety and performance.

CLASS I
Luminaires of insulation Class I - with earth connector.

CLASS II
Luminaires of insulation Class II - With safety isolation, this means the tension conductions element are protected by additional isolation.
The isolation of an earth wire it is not necessary and the connection to it is not allowed.

48V input Class III

24V input Class III

CASAMBI

Recyclable

Tuneable White

IP_ _ Degree of Ingress Protection

1st Number	Protection Against Dust and Solid Objects	2nd Number	Protection Against Moisture and Liquids
0	No-Protection	**0**	No-Protection
1	Protection against solid objects >50 mm	**1**	Protection against dripping water
2	Protection against solid objects >12 mm	**2**	Protection against dripping water tilted > 15 deg
3	Protection against solid objects >2.5 mm	**3**	Protection against spraying water > 30 deg
4	Protection against solid objects >1 mm	**4**	Protection against spraying water
5	Dust - protected	**5**	Protection against water jet
6	Dust - tight	**6**	Protection against waves
		7	Protection against the effects of immersion
		8	Protection against submersion

Body Color



10 Black (RAL 9004)

11 White (RAL 9003)

Code System

Code ordering example: **G96D BC53 - 97 30 BS D0 11**

1. Product Code
2. Light Source Code
3. LED CRI
4. CCT-LED colour temperature
5. Beam angle
6. Dimming Options
7. Body colour

LED CRI	
95	CRI > 95
97	CRI > 97

CCT-LED Colour temperature	
27	Warm White 2700K
30	Warm White 3000K
35	Warm White 3500K
40	Warm White 4000K

Dimming Options	
ND	CC (DALI / 0-10V)
24	24V No Dim
D0	No Dim
D1	0-10V Dim
DA	Dali Dim
DC	CASAMBI
DN	On board Dim
DP	Phase Dim

Body Colour	
10	Black (RAL 9004)
11	White (RAL 9003)

How to order



10 - Black

11 - White

	Product Code	Light Source Code	LED Power	Nominal Lumen	Beam Angle (BA°)
CRI>97 3000K High Rendering					
Zero Framing Projector 18	**G96C**	**BC52**	2.4W	205 lm	**BS** (15° - 33°)
Zero Framing Projector 28	**G96D**	**BC53**	4.8W	470 lm	**BS** (11° - 32°)

CCT Options

27 2700K
30 3000K
35 3500K
40 4000K

Dimming Options

D0 No Dim
D1 0-10V Dim

1 Product Code	**G96D**
2 Light Source Code	**BC53**
3 LED CRI	**97**
4 CCT-LED colour temperature	**30**
5 Beam angle	**BS**
6 Dimming Options	**D0**
7 Body colour	**11**

formalighting

Global presence

Celebrating over 50 years of vision, dedication and innovation, formalighting's versatile and high-quality product offerings extends internationally via our headquarters in Hong Kong, London, Milan and Shanghai.
Our well chosen and selected partners as well as our affiliated international offices broaden our global presence further in markets such as USA, Australia, Japan, South East Asia, India and the Middle East.

Through our commitment to growth and investment within formalighting's professional team, infrastructure and product ranges, we are able to provide increasing service to our global retail and hospitality clients as well as lighting designers and specifiers strengthening our position as a leading international supplier of innovative architectural lighting solutions and systems.

With over 50 years' experience in designing and manufacturing architectural lighting, formalighting's comprehensive portfolio offers a competitive range of European designed and expertly engineered products that carry CB, CE, CCC and UL certifications.

Furthermore formalighting's latest award-winning motorized range of track, pendant, and recessed fixtures, featuring remote-controlled adjustable pan and tilt, dim, dim to warm, tuneable white and beam shaping lens, are available worldwide incorporating the latest, most advanced lighting technologies.

MILAN

EUROPE HEADQUARTERS

Tel (+39) 02 9354 0300

Fax (+39) 02 9343 5117

E- mail info-europe@formalighting.com

HONG KONG

ASIA HEADQUARTERS

Tel (+ 852) 2516 6500

Fax (+ 852) 2516 6525

E- mail info-asia@formalighting.com

NEW YORK

LOCAL SALES OFFICE

E- mail info-us@formalighting.com

SHANGHAI

LOCAL SALES OFFICE

E- mail info-china@formalighting.com

LONDON

LOCAL SALES OFFICE

E- mail info-uk@formalighting.com

AUSTRALIA

LOCAL SALES OFFICE

Tel (+61) 488 567 388

E- mail info-australia@formalighting.com

INDIA

LOCAL SALES OFFICE

Tel (+91) 9686351257

E- mail info-india@formalighting.com

formalighting is constantly developing and improving its products therefore all information, drawings illustrations, specifications, photometric values in this catalogue are indicatives and shall not form part of any commitment by our company that reserves the right to change specifications without prior notification or public announcement. Technical information on the installation-instruction has precedence over the information in the catalogue.
Our general terms and conditions shall apply notwithstanding any stipulation on the contrary to all the orders and agreement with formalighting. You can obtain a copy of these conditions on demand.

Publication date: October 2026
©Copyright formalighting

With thanks to all contributors for the realization of this catalogue

Designed by formalighting's Graphic Design Department

No part of this catalogue may be copied without written authorization of formalighting

formalighting

MILAN

-

LONDON

-

USA

-

HONG KONG

-

SHANGHAI

-

INDIA