formalighting


Micro

48V Track System

2026

Micro 48V Track System

Micro 48V
Track System

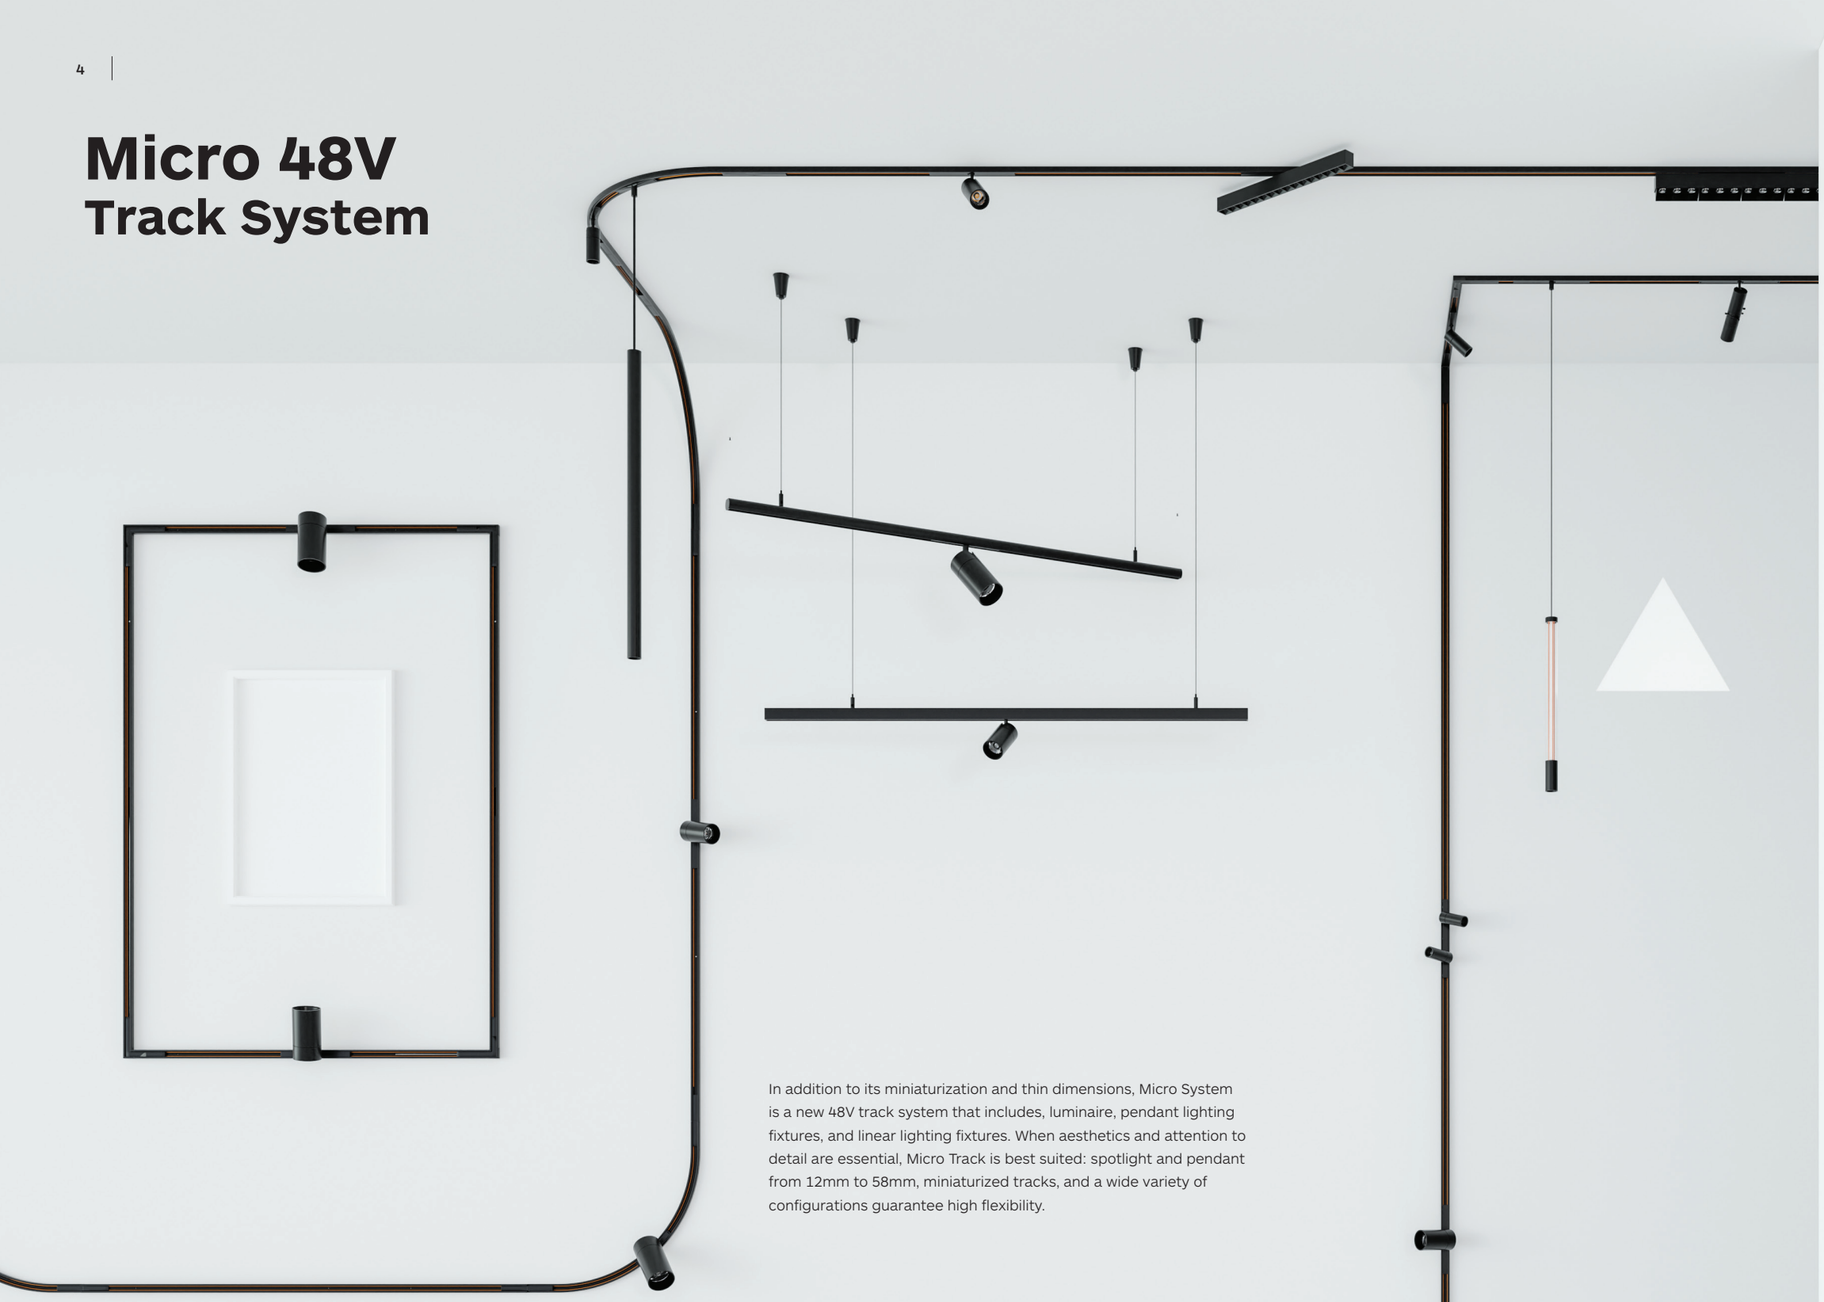

In addition to its miniaturization and thin dimensions, Micro System is a new 48V track system that includes, luminaire, pendant lighting fixtures, and linear lighting fixtures. When aesthetics and attention to detail are essential, Micro Track is best suited: spotlight and pendant from 12mm to 58mm, miniaturized tracks, and a wide variety of configurations guarantee high flexibility.







Ø 25

Viivo 25

Ø 35

Viivo 35

Ø 45

Viivo 45

Viivo 45 Zoom

Ø 58

Viivo 58

Viivo 58 Zoom

Viivo Series

Viivo 25 / 35 / 45 / 58

P.16 - 17

Viivo Twins

Viivo 25 / 35 Twins

P.14

Ø 35

Ø 25

Micro 48V Track System

www.formalighting.com

Ø 58

TicTok 58

TicTok 58 Zoom

Ø 45

TicTok 45

TicTok 45 Zoom

Ø 35

TicTok 35

Ø 25

TicTok 25



TicTok Series

TicTok 25 / 35 / 45 / 58

P.20 - 28

TicTok Twins

TicTok 25 / 35 Twins

P.18

Ø 25

Ø 35

formalighting

Zero



Zero Framing Projector

Ø 12

Zero 12

P.30

Ø 12

Zero 12 Alto

P.30

Ø 33

Zero 33

P.32

Ø 18

Zero Framing Projector 18

P.34


Ø 28

Zero Framing Projector 28

P.34

Polaris

Pixxo & Pixxo Retro

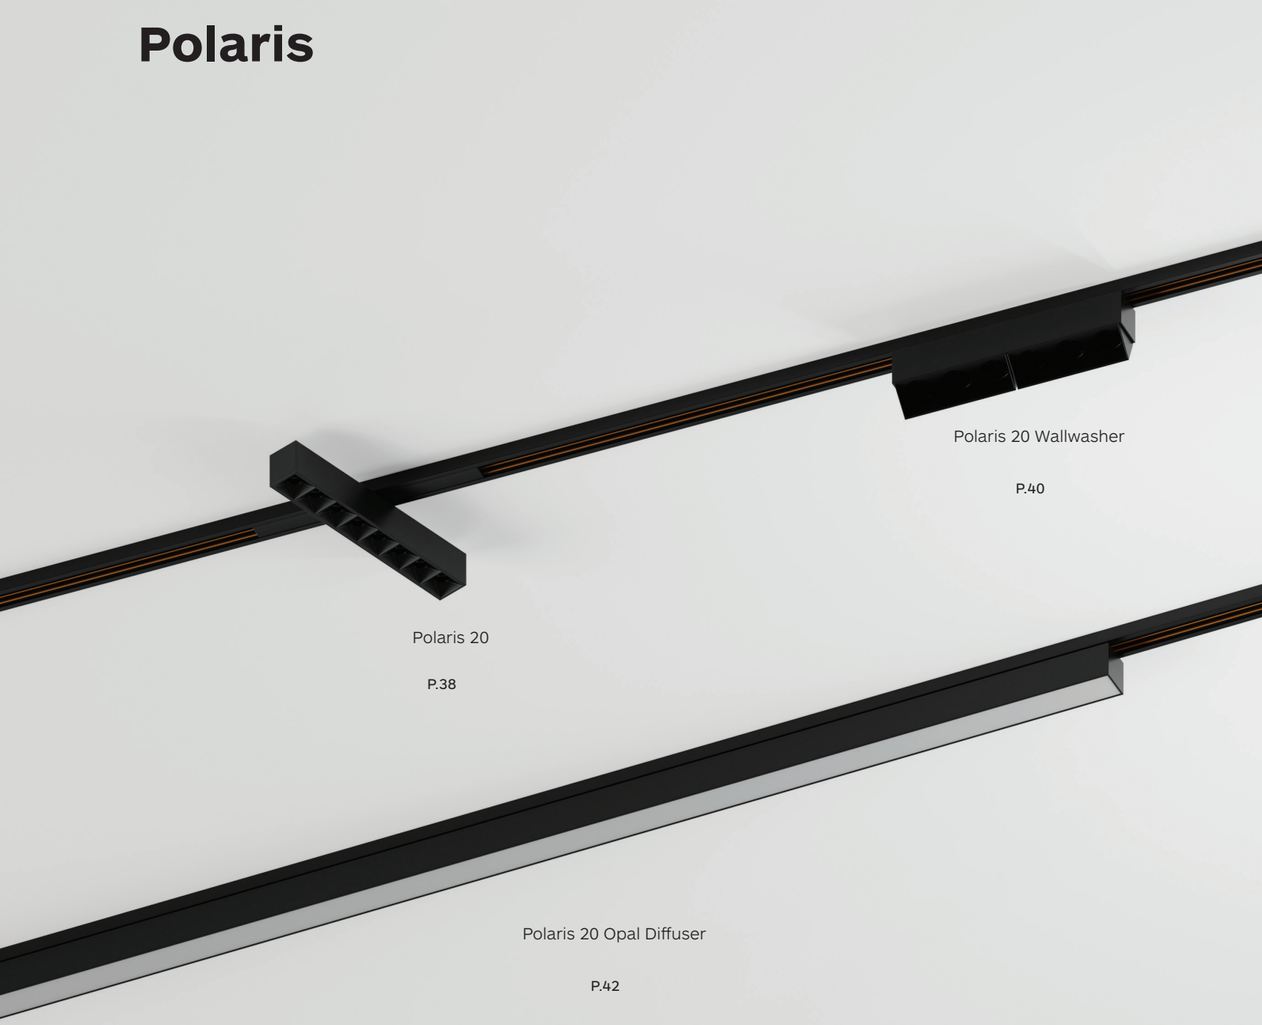

Polaris 20

P.38

Polaris 20 Wallwasher

P.40

Polaris 20 Opal Diffuser

P.42



Ø 25

Pixxo Retro 25 / 38

P.44

Ø 36

Pixxo 25 / 36

P.50

Ø 25

Pixxo 25 / 36
Curved Track

P.46

Ø 38

Pixxo Retro 25 / 38
Curved Track

P.50

Page 14 **Viivo**

Page 18 **TicTok**

Page 30 **Zero**

Page 34 **Zero Framing**

Projector

Page 38 **Polaris**

Page 44 **Pixxo Retro**


Page 50 **Pixxo**

Micro 48V Track Options

Pages 56 - 57

Power Supply

Pages 66 - 67

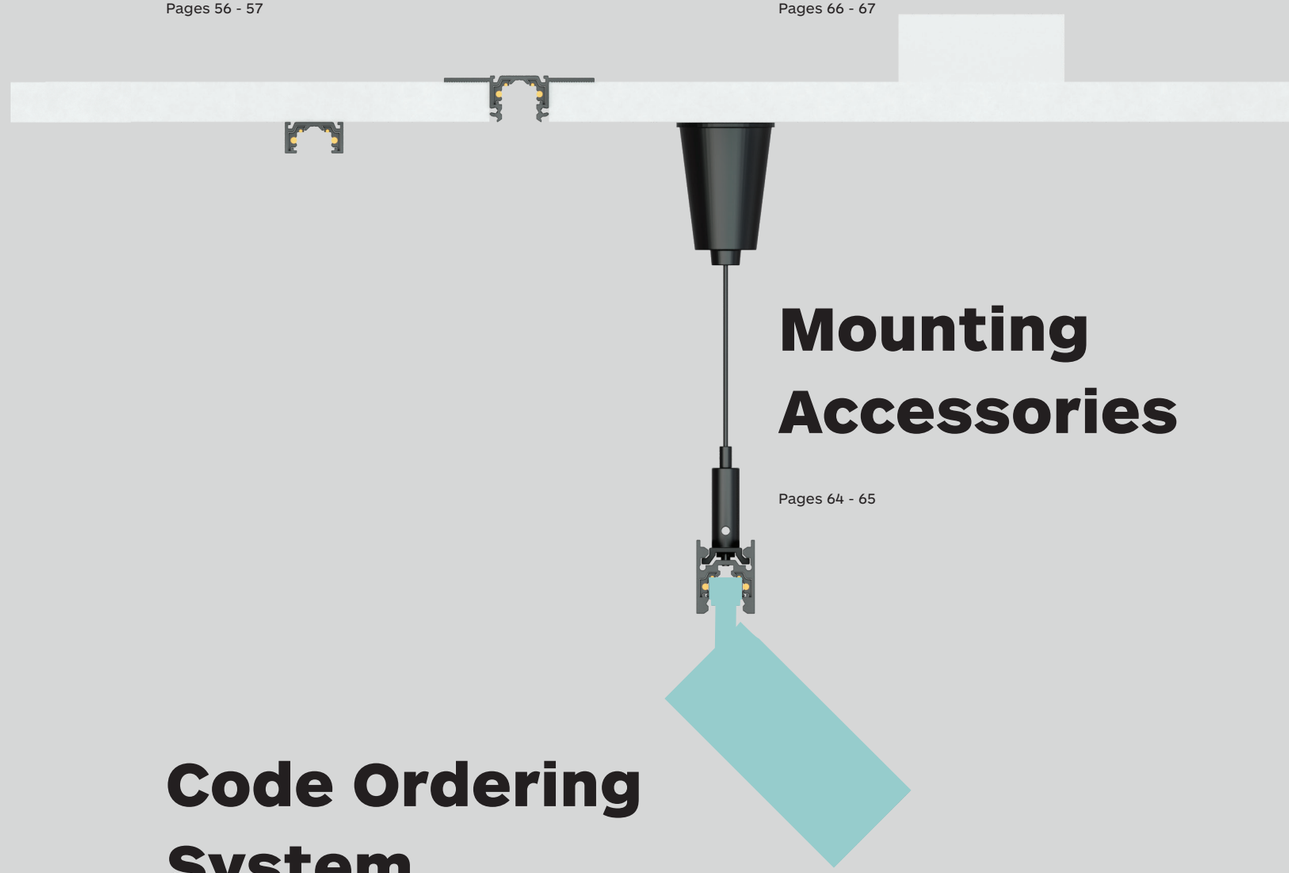

Mounting Accessories

Pages 64 - 65

Code Ordering System

Pages 72 - 75

Viivo Twins

Micro Track

Viivo Twins enables users to create unique lighting schemes and configurations. Tool-free interchangeable LED modules facilitate design flexibility and ease of on-site maintenance.

Available in two different adjustable light head sizes Ø25 and Ø35, with versatile aiming angle tiltable 0°-90° and rotatable 360°.

With an Embossed Matt Black/white finish, it is the perfect solution for retail, hospitality, and high-end residences. Viivo Twins is available with Casambi and DALI control options.

For complete code ordering information, please see pages 72-75.



- **65** - Embossed Matt Black
- **54** - Embossed Matt White
- **1Y** - Embossed Matt Total White
- **1A** - Chrome Gold
- **27** - Chrome Polished
- **79** - Brushed Aluminium
- **3G** - Brushed Brass
- **3H** - Antique Brass
- **3J** - Blackened Brass

LED Sources:

High Efficacy:
CRI: 90 | CCT: 2700K, 3000K, 3500K, 4000K.

Accessories:


For more information about Micro 48V track system accessories see pages 64-65.


Viivo 25 & 35 Twins


48V | CE | IP20 | 90° | 350°

65 | 54 | 1Y | 1A | 27 | 79 | 3G | 3H | 3J



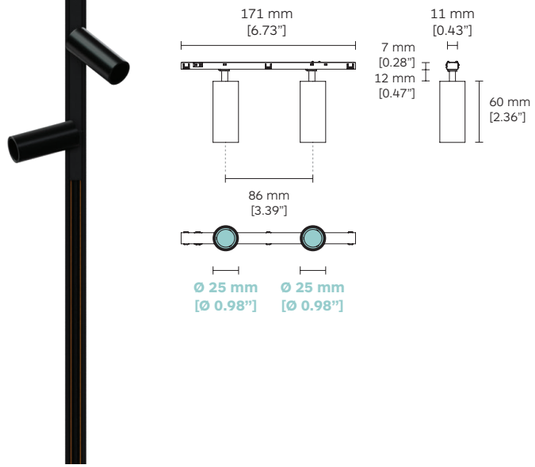

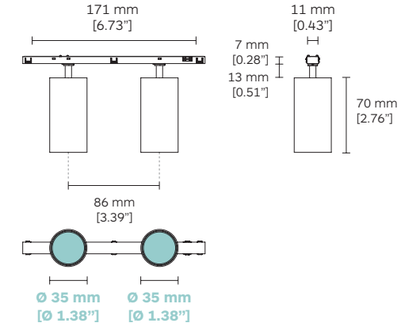




		Product Code [1]	LED Module Code	LED Power	Nominal Lumen	Beam Angle (BA°)
CRI>90 3000K High Efficacy	Viivo 25 Twins	**T6K6**	**E017**	2 x 3.4W	2 x 370 lm	**15°** / **20°** / **32°**
	Viivo 35 Twins	**T6K7**	**BH23**	2 x 5.2W	2 x 761 lm	**16°** / **24°** / **34°**

Dimming Options		CCT Options	
D0	No Dim	**27**	2700K
DA	Dali Dim	**30**	3000K
DC	CASAMBI	**35**	3500K
D1	0-10V Dim	**40**	4000K

formalighting

Viivo


25 | 35 | 45 | 58
Micro 48V Track

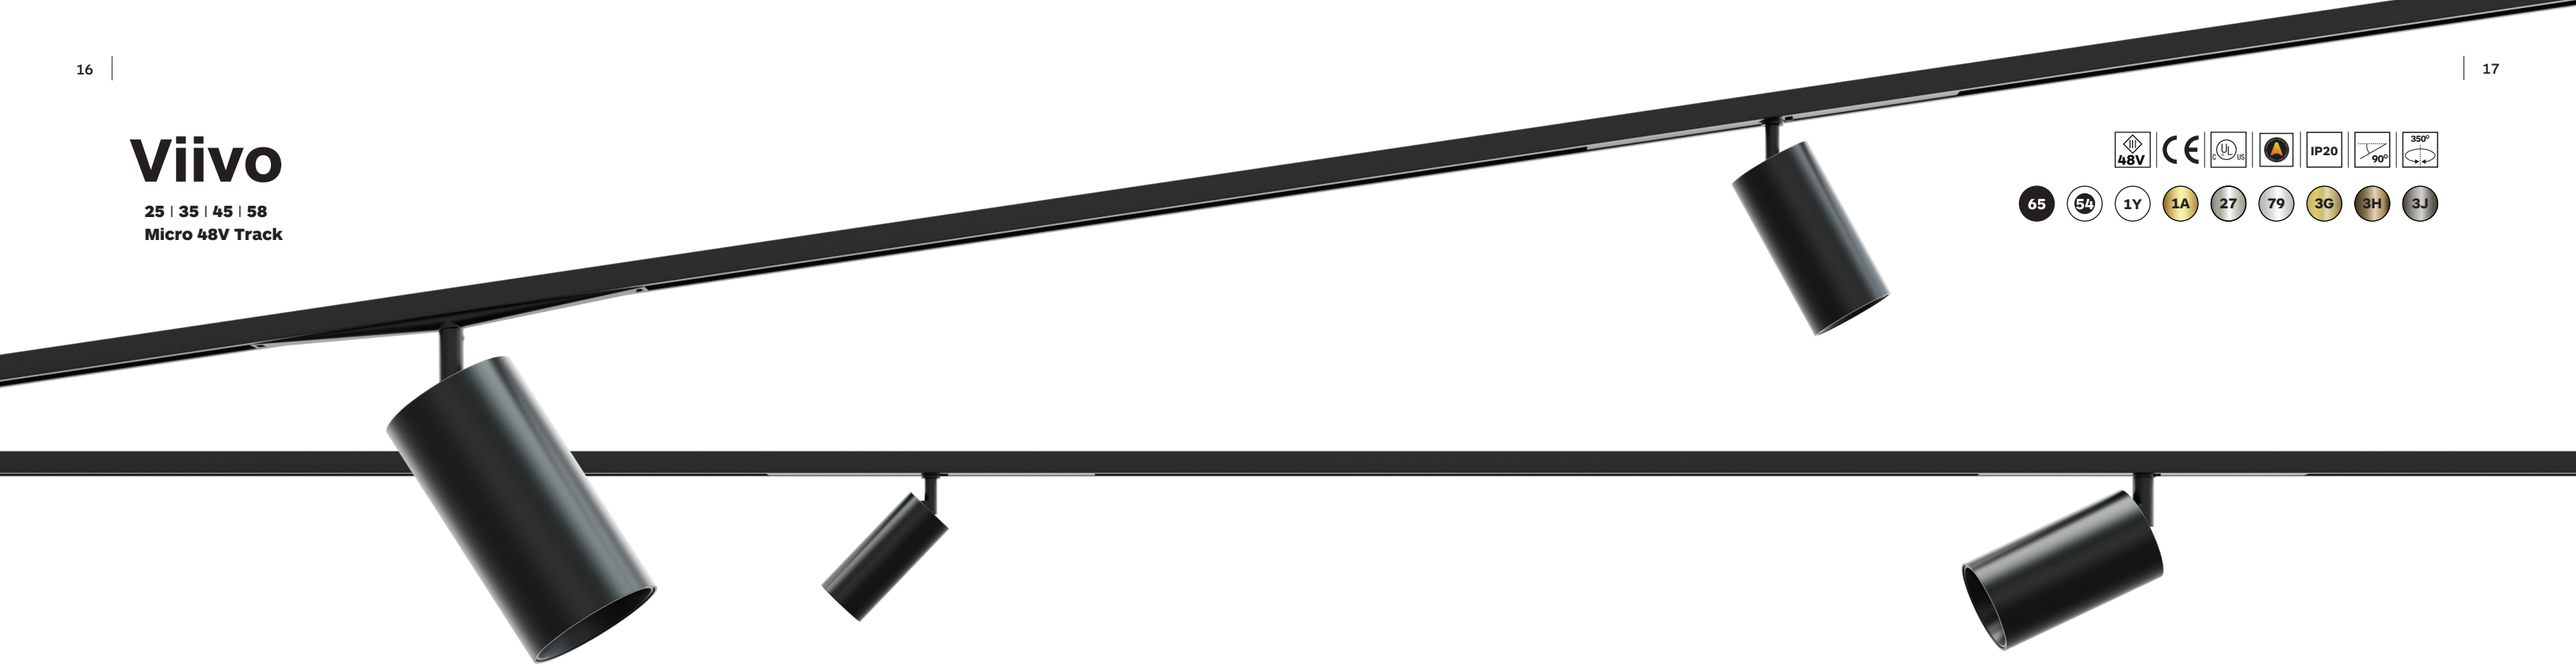

48V | CE | cULus | IP20 | 90° | 350°

65 | 54 | 1Y | 1A | 27 | 79 | 3G | 3H | 3J

- **65** - Embossed Matt Black
- **54** - Embossed Matt White
- **1Y** - Embossed Matt Total White
- **1A** - Chrome Gold
- **27** - Chrome Polished
- **79** - Brushed Aluminium
- **3G** - Brushed Brass
- **3H** - Antique Brass
- **3J** - Blackened Brass

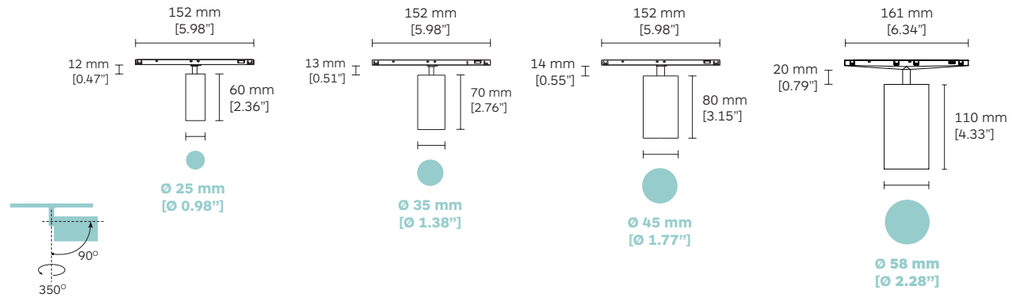

The Viivo Low Voltage is an energy-saving, track-mounted low-voltage track system with an integrated driver, which focuses on modularity and eco-friendliness.
The tool-free interchangeable LED module facilitates design flexibility and ease of on-site maintenance. Available in four different adjustable light head sizes Ø25, Ø35, Ø45, and Ø58mm, with versatile aiming angle tiltable 0° - 90° and rotatable 360°.

For complete code ordering information, please see pages 72-75.

LED Sources:

High Efficacy:
CRI: 90 | CCT: 2700K, 3000K, 3500K, 4000K.

High Rendering:
CRI: 97 | CCT: 2700K, 3000K, 3500K, 4000K.

Accessories:

- Wide & Dense Texture Honeycomb Louvre
- Elliptical Beam Diffuser
- Coloured Glasses Diffuser
- Opal Lens
- Spread Lens
- Cross blade Louvre
- Barn doors
- Wallwasher Cone 45°

Please see page 25 for details.

		Product Code	LED Module Code	LED Power	Nominal Lumen	Beam Angle (BA°)
CRI>90 3000K **High Efficacy**	Viivo 25	**T6A8**	**E017**	3.4W	370 lm	**15°** / **20°** / **32°**
	Viivo 35	**T6A9**	**BH23**	5.2W	761 lm	**16°** / **24°** / **34°**
	Viivo 45	**T6B0**	**E091**	9W	1357 lm	**18°** / **26°** / **36°**
	Viivo 58	**T6B1**	**E093**	11W	1632 lm	**12°** / **18°**
			E097	14W	2240 lm	**25°** / **35°**
CRI>97 3000K **High Rendering**	Viivo 35	**T6A9**	**E013**	5W	620 lm	**20°** / **24°** / **38°**
	Viivo 45	**T6B0**	**JC02**	10W	922 lm	**12°**
				9W	975 lm	**18°** / **26°** / **38°**
	Viivo 58	**T6B1**	**JC01**	15W	1418 lm	**12°** / **18°**
				14W	1590 lm	**24°** / **34°**

Dimming Options	
D0	No Dim
DA	Dali Dim
DC	CASAMBI
D1	0-10V Dim

CCT Options	
27	2700K
30	3000K
35	3500K
40	4000K

TicTok Twins

Micro Track



65 - Embossed Matt Black

54 - Embossed Matt White

1Y - Embossed Matt Total White

27 - Chrome Polished

The TicTok Twins series is an energy-saving micro track system with an integrated driver, which focuses on modularity and eco-friendliness. The tool-free, interchangeable LED module facilitates design flexibility and ease of on-site maintenance.

Available in two different adjustable light head sizes Ø25 and Ø35, with versatile aiming angle tiltable 0°-70° and rotatable 360°.

TicTok Twins is available with Casambi and DALI dimming options; DALI dimmable fixtures can also be controlled by Casambi DALI Broadcast.

For complete code ordering information, please see pages 72-75.

LED Sources:

High Efficacy:
CRI: 90 | CCT: 2700K, 3000K, 3500K, 4000K.

Accessories:


For more information about Micro 48V track system accessories see pages 64-65.


TicTok 25 & 35 Twins


48V | CE | IP20 | 70° | 350°

65 | 54 | 1Y | 27



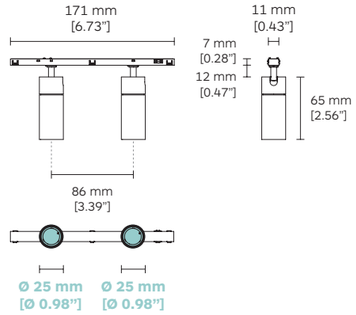

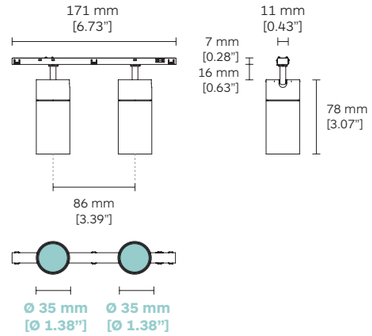



CRI>90
3000K

High Efficacy

	Product Code	LED Module Code	LED Power	Nominal Lumen	Beam Angle (BA°)
TicTok 25 Twins	**T6J8**	**E017**	2 x 3.4W	2 x 370 lm	**15°** / **20°** / **32°**
TicTok 35 Twins	**T6J9**	**BH23**	2 x 5.2W	2 x 761 lm	**16°** / **24°** / **34°**

Dimming Options		CCT Options	
00	No Driver	**27**	2700K
DA	Dali Dim	**30**	3000K
DC	CASAMBI	**35**	3500K
D1	0-10V Dim	**40**	4000K

TicTok

25 | 35 | 45 | 58
Micro 48V Track

The TicTok series is an energy-saving micro track system with an integrated driver, which focuses on modularity and eco-friendliness. The tool-free interchangeable LED module facilitates design flexibility and ease of on-site maintenance. Designed to be the perfect solution for accent lighting in sustainable lighting design schemes for retail, hospitality and high-end residential.

TicTok is available with Casambi and DALI control options. DALI dimmable fixtures can also be controlled by Casambi DALI Broadcast device, please see pages 54-55 for details.

For complete code ordering information, please see pages 72-75.

LED Sources:

High Efficacy:
CRI: 90 | CCT: 2700K, 3000K, 3500K, 4000K.

High Rendering:
CRI: 97 | CCT: 2700K, 3000K, 3500K, 4000K.

Accessories:

- Wide & Dense Texture Honeycomb Louvre
- Elliptical Beam Diffuser
- Coloured Glasses Diffuser
- Opal Lens
- Spread Lens
- Cross blade Louvre
- Barn doors
- Wallwasher Cone 45°

Please see page 25 for details.


- **65** - Embossed Matt Black
- **54** - Embossed Matt White
- **1Y** - Embossed Matt Total White
- **27** - Chrome Polished


TicTok 25

48V | CE | IP20 | 70° | 350°

65 | 54 | 1Y | 27







		Product Code	LED Module Code	LED Power	Nominal Lumen	Beam Angle (BA°)
CRI>90 3000K	TicTok 25	**T6B2**	**E017**	3.4W	370 lm	**15°** / **20°** / **32°**

High Efficacy


Dimming Options		CCT Options	
D0	No Dim	**27**	2700K
DA	Dali Dim	**30**	3000K
DC	CASAMBI	**35**	3500K
D1	0-10V Dim	**40**	4000K


TicTok 35

48V | CE | SAA | UL | IP20 | 70° | 350°

65 | 54 | 1Y | 27









		Product Code	LED Module Code	LED Power	Nominal Lumen	Beam Angle (BA°)	Dimming Options	CCT Options
CRI>90 3000K High Efficacy	TicTok 35	**T6B3**	**BH23**	5.2W	761 lm	**16°** / **24°** / **34°**	**D0** No Dim **DA** Dali Dim **DC** CASAMBI **D1** 0-10V Dim	**27** 2700K **30** 3000K **35** 3500K **40** 4000K

TicTok 45


48V | CE | UL | IP20 | 70° | 350°

65 | 54 | 1Y | 27






Flexible adaptor for curved track



		Product Code	LED Module Code	LED Power	Nominal Lumen	Beam Angle (BA°)	Dimming Options	CCT Options
CRI>90 3000K High Efficacy	TicTok 45 TicTok 45 Curved Track	**T662** **T6B4**	**E091**	9W	1357 lm	**18°** / **26°** / **36°**	**D0** No Dim **DA** Dali Dim **DC** CASAMBI **D1** 0-10V Dim	**27** 2700K **30** 3000K **35** 3500K **40** 4000K
CRI>97 3000K High Rendering	TicTok 45 TicTok 45 Curved Track	**T662** **T6B4**	**JC02**	10W 9W	922 lm 975 lm	**12°** **18°** / **26°** / **38°**		

TicTok 58




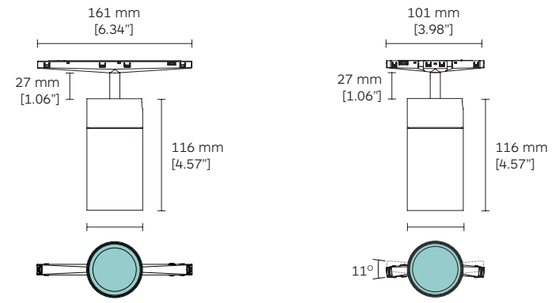

Ø 58 mm
[Ø 2.28"]

Ø 58 mm
[Ø 2.28"]

Flexible adaptor for curved track



		Product Code	LED Module Code	LED Power	Nominal Lumen	Beam Angle (BA°)
CRI>90 3000K High Efficacy	TicTok 58	**T664**	**E093**	11W	1632 lm	**12°** / **18°**
			E097	14W	2240 lm	**25°** / **35°**
	TicTok 58 Curved Track	**T6B5**				
CRI>97 3000K High Rendering	TicTok 58	**T664**	**JC01**	15W	1418 lm	**12°** / **18°**
				14W	1590 lm	**24°** / **34°**
	TicTok 58 Curved Track	**T6B5**				


Dimming Options		CCT Options	
D0	No Dim	**27**	2700K
DA	Dali Dim	**30**	3000K
DC	CASAMBI	**35**	3500K
D1	0-10V Dim	**40**	4000K

Optical Accessories









Product / Optical Accessories	Coloured Glasses Diffuser	Opal Lens	Spread Lens	Elliptical Beam Diffuser	Wide Texture Honeycomb Louvre
	25, 42, 55, 85	Colour 41	Colour 41	Colour 41	Colour 10
TicTok 25 & Viivo 25	**2G57**	**2G59**	**/**	**2G61**	**2G30**
TicTok 35 & Viivo 35	**2G58**	**2G60**	**/**	**2G62**	**2G31**
TicTok 45 [1] & Viivo 45 [1]	**2F91**	**2F94**	**2F97**	**2F88**	**2F71**
TicTok 58 [1] & Viivo 58 [1]	**2F92**	**2F95**	**2F98**	**2F89**	**2F83**









Product / Optical Accessories	Dense Texture Honeycomb Louvre	Cross blade Louvre	Barn Doors	Wallwasher Cone 45°
	Colour 10	Colours 10, 17	Colours 10, 11	Colours 10, 17
TicTok 25 & Viivo 25	**2G32**	**/**	**/**	**/**
TicTok 35 & Viivo 35	**2G33**	**/**	**/**	**/**
TicTok 45 [1] & Viivo 45 [1]	**2F85**	**2G01**	**2G04**	**2G07**
TicTok 58 [1] & Viivo 58 [1]	**2F86**	**2G02**	**2G05**	**2G08**


Notes:

[1] No optical accessories are available for Viivo & TicTok 45, 58 Zoom series.

formalighting

TicTok Zoom

45 | 58
Micro 48V Track

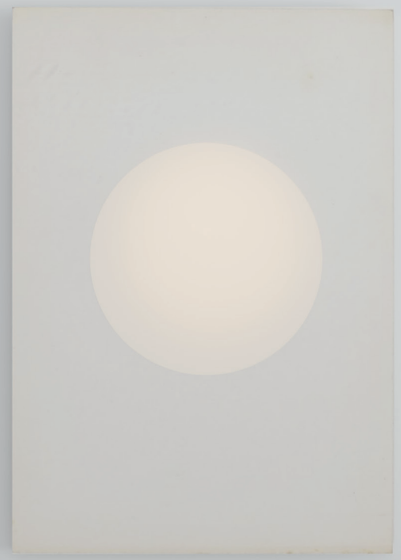

- **65** - Embossed Matt Black
- **54** - Embossed Matt White
- **1Y** - Embossed Matt Total White
- **27** - Chrome Polished

The TicTok Zoom 45 and 58 mm offers all the unique features of its family members, with the added benefit of beam angle control. Simply adjust the beam angle from 15° - 47° manually through its ring rotation mechanism. It offers a versatile aiming angle tiltable 0° - 70° and rotatable 360°.

TicTok Zoom is available with Casambi and DALI control options. DALI dimmable fixtures can also be controlled by Casambi DALI Broadcast device, please see pages 54-55 for details.

For complete code ordering information, please see pages 72-75.

LED Sources:

High Efficacy:
CRI: 90 | CCT: 2700K, 3000K, 3500K, 4000K.

High Rendering:
CRI: 97 | CCT: 2700K, 3000K, 3500K, 4000K.


Accessories:

For more information about Micro 48V track system accessories see pages 64-65.


TicTok Zoom 45

48V | CE | IP20 | 70° | 350° | 65 | 54 | 1Y | 27






Ø 45 mm
[Ø 1.77"]




Ø 45 mm
[Ø 1.77"]

Flexible adaptor for curved track



Zoom Spot 15° - 47°




		Product Code	LED Module Code	LED Power	Nominal Lumen	Beam Angle (BA°)	Dimming Options	CCT Options
CRI>90 3000K High Efficacy	TicTok Zoom 45	**T6A6**	**E099**	5W	761 lm	**BS** (15° - 47°)	**D0** No Dim	**27** 2700K
	TicTok Zoom 45 Curved Track	**T6B6**					**DN** On board Dim	**30** 3000K
							DC CASAMBI	**35** 3500K
							D1 0-10V Dim	**40** 4000K
CRI>97 3000K High Rendering	TicTok Zoom 45	**T6A6**	**E077**	5.5W	606 lm		**DR** Dim by Power Supply Unit	
	TicTok Zoom 45 Curved Track	**T6B6**						

TicTok Zoom 58


48V | CE | IP20 | 70° | 350° |

65 | 54 | 1Y | 27






Ø 58 mm
[Ø 2.28"]




Ø 58 mm
[Ø 2.28"]

Flexible adaptor for
curved track



Zoom Spot Options
16° ••• 34°



		Product Code	LED Module Code	LED Power	Nominal Lumen	Beam Angle (BA°)
CRI>90 3000K High Efficacy	TicTok Zoom 58	**T6A7**	**E100**	11W	1586 lm	**BS** (16° - 34°)
	TicTok Zoom 58 Curved Track	**T6B7**				
CRI>97 3000K High Rendering	TicTok Zoom 58	**T6A7**	**E030**	15W	1418 lm	**BS** (17° - 34°)
	TicTok Zoom 58 Curved Track	**T6B7**				

Dimming Options		CCT Options	
D0	No Dim	**27**	2700K
DA	Dali Dim	**30**	3000K
DC	CASAMBI	**35**	3500K
D1	0-10V Dim	**40**	4000K
DN	On board Dim		

formalighting

Zero 12

Micro 48V Track



Zero 12 and Zero 12 Alto is a low voltage miniature spot designed & developed for retail, showcase display, and museum lighting applications. Tiny yet mighty this ultra-miniature track spot is Ø12.5mm in size and is compatible with anti-glare accessories snoot with magnetic fixing mechanism. Zero 12 Alto comes with an integrated snoot.

Zero 12 is available with Casambi and DALI control options. DALI dimmable fixtures can also be controlled by Casambi DALI Broadcast device, please see pages 54-55 for details.

For complete code ordering information, please see pages 72-75.

LED Sources:

High Rendering:
CRI: 97 | CCT: 2700K, 3000K, 3500K, 4000K.

Accessories:

For more information about Micro 48V track system accessories see pages 64-65.


- **10** - Black
- **11** - White
- **65** - Embossed Matt Black
- **54** - Embossed Matt White
- **1A** - Chrome Gold


Zero 12


48V | CE | SIR us | UL us | IP20 | 90° | 330°

10 | 11 | 65 | 54 | 1A



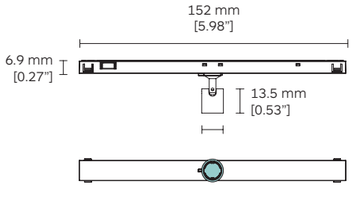

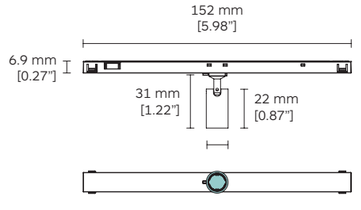



		Product Code	Light Source Code	LED Power	Nominal Lumen	Beam Angle (BA°)	Dimming Options	CCT Options
CRI>97 3000K High Rendering	Zero 12	**T964**	**BN12**	1W	117 lm	**19°** / **33°** / **EL**	**D0** No Dim	**27** 2700K
	Zero 12 Alto	**T966**				**19°** / **31°**	**DA** Dali Dim	**30** 3000K
							DC CASAMBI	**35** 3500K
								40 4000K

***EL** = Elliptical Beam (24° x 44°)*

Zero 33

Micro 48V Track



The Zero 33 is an addition to the Zero collection, with Ø33mm in size, fully adjustable spotlight that features an onboard beam angle adjustment of 8° - 85° and onboard dimming control 1-100% to adjust the light's intensity while remaining invisible from the short distances.

The Zero 33 is available with Casambi and DALI control options. DALI dimmable fixtures can also be controlled by Casambi DALI Broadcast device, please see pages 54-55 for details.

For complete code ordering information, please see pages 72-75.

LED Sources:

High Efficacy:
CRI: 90 | CCT: 2700K, 3000K, 3500K, 4000K.

Accessories:


- Diffuser or color filter
- Honeycomb
- Barn doors

Magnet-fixed, toolless, easily replaceable.

10 - Black

11 - White


08 - Gold





Zero 33




without Accessory | with Filter | with Honeycomb | with Honeycomb & Barn doors








Zoom Spot 8° - 85°



Ø 33 mm
[Ø 1.30"]




Ø 24.8 mm
[Ø 0.98"]




		Product Code	Light Source Code	LED Power	Nominal Lumen	Beam Angle (BA°)	Dimming Options	CCT Options
CRI>90 3000K **High Efficacy**	Zero 33	**T963**	**BR21**	4.5W	448 lm	**BS** (8° - 85°)	**D0** No Dim **DA** Dali Dim **DC** CASAMBI **DN** On board Dim	**27** 2700K **30** 3000K **35** 3500K **40** 4000K

Optical Accessories







Product / Optical Accessories	Filter	Honeycomb Colour 10	Barn doors Colours 10, 11, 35
Zero 33	**G2A6**	**G2A7**	**G2A1**

***BS** = Beam Shaping.*

formalighting

Zero Framing Projector

Micro Track

Advanced, multi-functional LED track-mounted projector, tiltable vertically 0°-90° and rotatable horizontally 350°. With built-in bidirectional zooming lens with sharpness adjustability, and lens rotation. Adjustable shutters to re-frame the beam to the desired size and shape (circle, square/rectangle, or irregular four-sided shapes).

Compatible with gobo insertion for the logo. High-precision optics for sharp outlines and high degree of lighting uniformity.

For complete code ordering information, please see page 35.

LED Sources:

High Rendering:
CRI: 97 | CCT: 2700K, 3000K, 3500K, 4000K.

Accessories:

- Gobo Film

Contact us for custom-made logo projection lens.

10 - Black


11 - White



Zero Framing Projector
Micro Track

48V | CE | IP20 | 90° | 350°

10 | 11

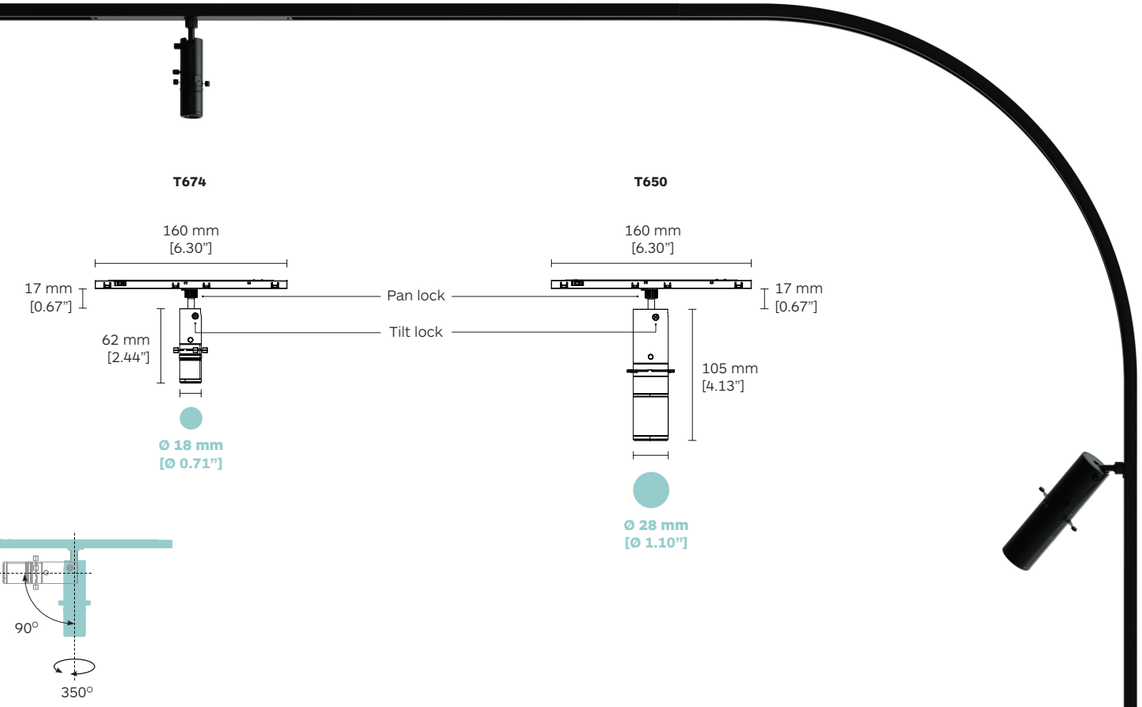

		Product Code	LED Source Code	LED Power	Nominal Lumen	Beam Angle (BA°)
CRI>97 3000K High Rendering	Zero Framing Projector 18	**T674**	**BC52**	2.4W	205 lm	**BS** (15° - 33°)
	Zero Framing Projector 28	**T650**	**BC53**	4.8W	470 lm	**BS** (11° - 32°)

Dimming Options

- **D0** No Dim
- **DA** Dali Dim
- **DC** CASAMBI

CCT Options

- **27** 2700K
- **30** 3000K
- **35** 3500K
- **40** 4000K

Optical Accessories





Product / Optical Accessories	Gobo Film 18 Colour 10	Gobo Film 28 Colour 10
Zero Framing Projector 18	**2G91**	**/**
Zero Framing Projector 28	**/**	**2G92**

***BS**: Beam Shaping.*

formalighting

Polaris
Micro 48V Track System

The Polaris Series die-cast aluminum in four different types, the standard aisle spotlight version with an integrated diamond faceted no-dazzle screen in thermoplastic; the adjustable version allows extra flexibility, diffused version for soft and diffuse illumination and the wallwasher version for high precision light control.




Polaris 20 Opal Diffuser

Polaris 20

Polaris 20 Wallwasher

Polaris 20

Micro 48V Track

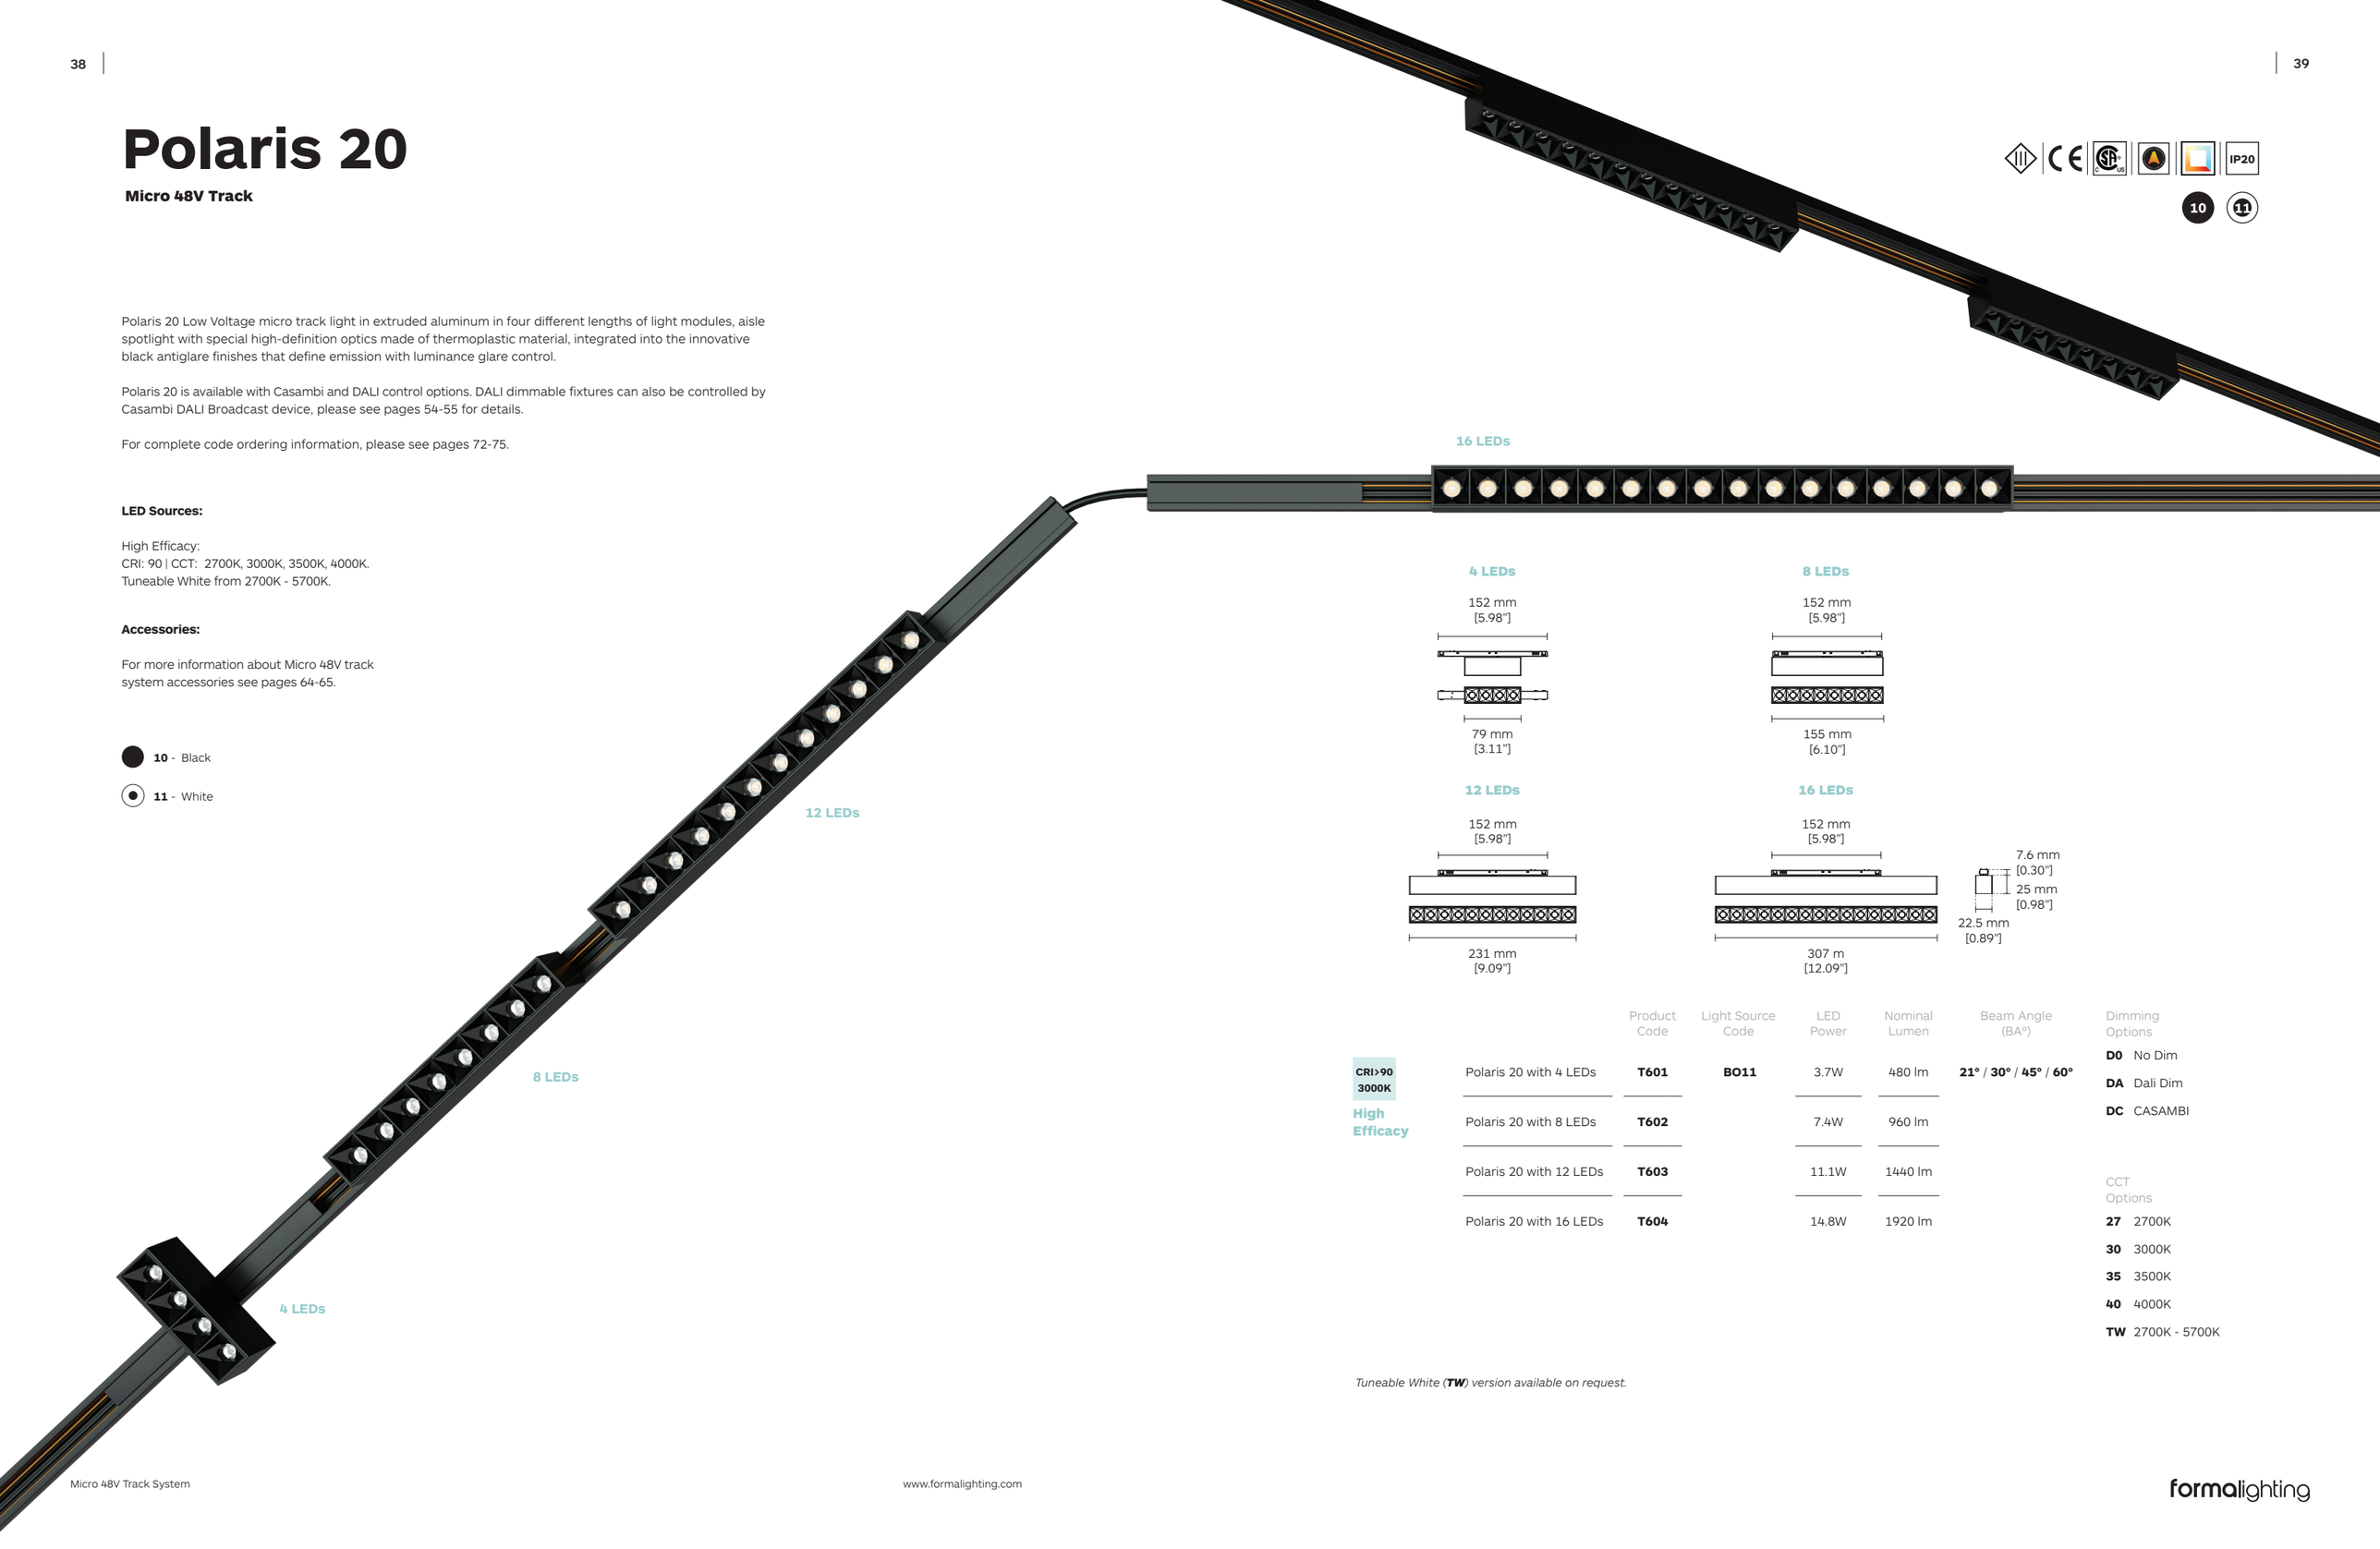

IP20

10 11

Polaris 20 Low Voltage micro track light in extruded aluminum in four different lengths of light modules, aisle spotlight with special high-definition optics made of thermoplastic material, integrated into the innovative black antiglare finishes that define emission with luminance glare control.

Polaris 20 is available with Casambi and DALI control options. DALI dimmable fixtures can also be controlled by Casambi DALI Broadcast device, please see pages 54-55 for details.

For complete code ordering information, please see pages 72-75.

LED Sources:

High Efficacy:
CRI: 90 | CCT: 2700K, 3000K, 3500K, 4000K.
Tuneable White from 2700K - 5700K.

Accessories:

For more information about Micro 48V track system accessories see pages 64-65.

10 - Black

11 - White

4 LEDs

152 mm
[5.98"]

79 mm
[3.11"]

8 LEDs

152 mm
[5.98"]

155 mm
[6.10"]

12 LEDs

152 mm
[5.98"]

231 mm
[9.09"]

16 LEDs

152 mm
[5.98"]

307 m
[12.09"]

7.6 mm
[0.30"]

25 mm
[0.98"]

22.5 mm
[0.89"]

		Product Code	Light Source Code	LED Power	Nominal Lumen	Beam Angle (BA°)
CRI>90 3000K High Efficacy	Polaris 20 with 4 LEDs	**T601**	**BO11**	3.7W	480 lm	**21°** / **30°** / **45°** / **60°**
	Polaris 20 with 8 LEDs	**T602**		7.4W	960 lm	
	Polaris 20 with 12 LEDs	**T603**		11.1W	1440 lm	
	Polaris 20 with 16 LEDs	**T604**		14.8W	1920 lm	

Dimming Options

D0 No Dim

DA Dali Dim

DC CASAMBI

CCT Options

27 2700K

30 3000K

35 3500K

40 4000K

TW 2700K - 5700K

*Tuneable White (**TW**) version available on request.*

formalighting

Polaris 20 Wallwasher

Micro 48V Track

Polaris 20 Wallwasher Low Voltage micro track light in extruded aluminum in four different lengths, aisle spotlight with special high-definition optics made of thermoplastic material, integrated glare shield with luminance glare control, energy-efficient high-power LEDs with excellent color rendering; wallwasher light distribution with supreme uniformity.

Polaris 20 Wallwasher is available with Casambi and DALI control options. DALI dimmable fixtures can also be controlled by Casambi DALI Broadcast device, please see pages 54-55 for details.

For complete code ordering information, please see pages 72-75.

LED Sources:

High Efficacy:
CRI: 90 | CCT: 2700K, 3000K, 3500K 4000K.
Tuneable White from 2700K - 5700K.

Accessories:

For more information about Micro 48V track system accessories see pages 64-65.

10 - Black

11 - White

IP20

10 11

3 LEDs




6 LEDs

9 LEDs


12 LEDs




12 LEDs




3 LEDs



6 LEDs



9 LEDs



		Product Code	Light Source Code	LED Power	Nominal Lumen	Beam Angle (BA°)
CRI>90 3000K High Efficacy	Polaris 20 Wallwasher with 3 LEDs	**T626**	**BN11**	4.2W	525 lm	**WW***
	Polaris 20 Wallwasher with 6 LEDs	**T627**		8.4W	1050 lm	
	Polaris 20 Wallwasher with 9 LEDs	**T628**		12.6W	1575 lm	
	Polaris 20 Wallwasher with 12 LEDs	**T629**		16.8W	2100 lm	

Dimming Options

D0 No Dim

DA Dali Dim

DC CASAMBI

CCT Options

27 2700K

30 3000K

35 3500K

40 4000K


TW 2700K - 5700K

** WW = Wallwasher. Ordering code; **WW**.*
*Tuneable White (**TW**) version available on request.*

formalighting

Polaris 20 Opal Diffuser

Micro 48V Track

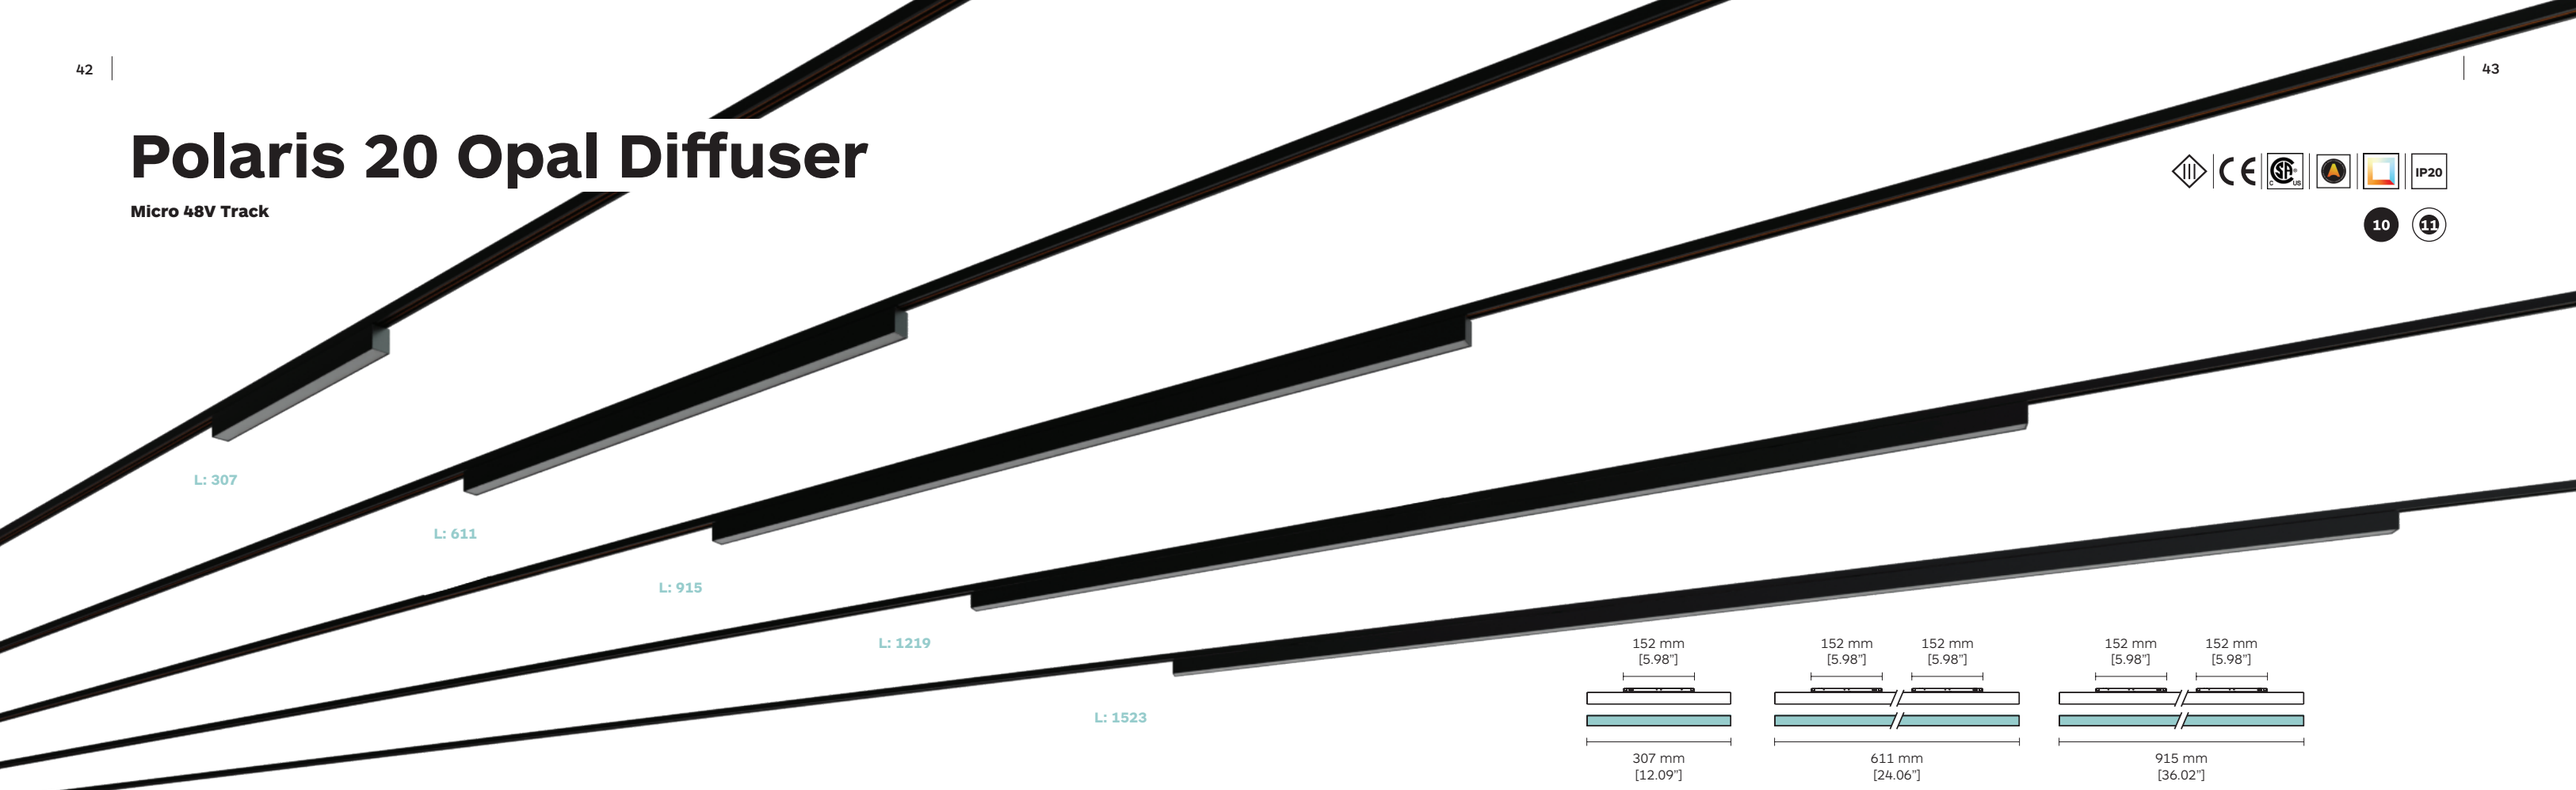

10 - Black

11 - White

Polaris 20 Opal Diffuser Low Voltage micro track light body in extruded aluminum inclusive of white opal diffuser for soft and diffuse illumination. Available in five different lengths up to 1522mm; high-power LEDs with excellent color rendering.

Polaris 20 Opal Diffuser is available with Casambi and DALI control options. DALI dimmable fixtures can also be controlled by Casambi DALI Broadcast device, please see pages 54-55 for details.

For complete code ordering information, please see pages 72-75.

LED Sources:


High Rendering:
CRI: 97 | CCT: 2700K, 3000K, 3700K, 4000K.
Tuneable White from 2700K - 5700K.

Accessories:

For more information about Micro 48V track system accessories see pages 64-65.

IP20

10 11

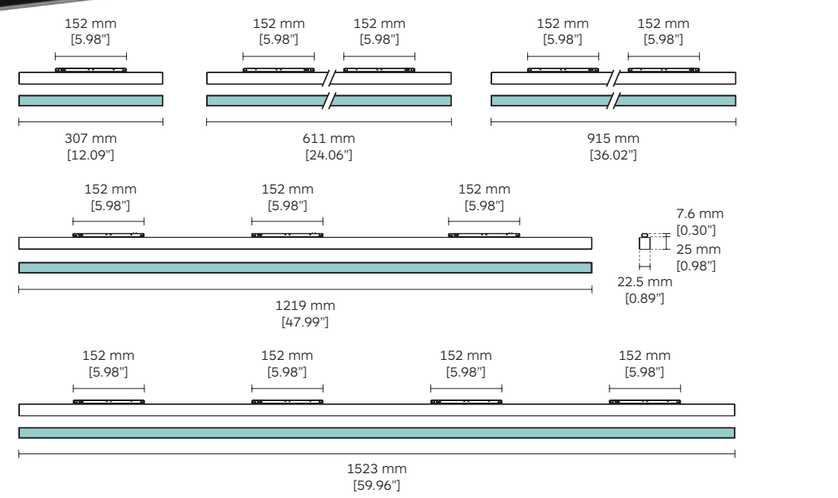

		Product Code	Light Source Code	LED Power	Nominal Lumen	Beam Angle (BA°)
CRI>97 3000K High Rendering	Polaris 20 Opal Diffuser L:307	**T676**	**BT21**	7.4W	945 lm	**OD**
	Polaris 20 Opal Diffuser L:611	**T677**		15W	1890 lm	
	Polaris 20 Opal Diffuser L:915	**T678**		22W	2835 lm	
	Polaris 20 Opal Diffuser L:1219	**T679**		30W	3780 lm	
	Polaris 20 Opal Diffuser L:1523	**T680**		37W	4725 lm	

Dimming Options

D0 No Dim
DA Dali Dim
DC CASAMBI

CCT Options

27 2700K
30 3000K
35 3500K
40 4000K
TW 2700K - 5700K

*OD = Opal diffuser. Ordering code; **OD**.*
*Tuneable White (**TW**) version available on request.*

Pixxo Retro

Micro 48V Track

Pixxo Retro - A modern cylinder pendant LED Light, that offers both classic filament ambient light and modern accent light. LED filament light is designed to resemble a traditional incandescent light bulb with visible filaments for aesthetic and create ambient; the spotlight with multiple beam angle options provides functional accent lighting.

Pixxo Retro is available with Casambi and DALI control options. DALI dimmable fixtures can also be controlled by Casambi DALI Broadcast device, please see pages 54-55 for details.

For complete code ordering information, please see pages 72-75.

LED Sources:

Ambient light:
CRI: 80 | CCT: 2200K.

Spot light:
High Efficacy
CRI: 90 | CCT: 2700K, 3000K, 3500K, 4000K.

Accessories:


For more information about Micro 48V track system accessories see pages 64-65.


10 - Black


65 - Embossed Matt Black

11 - White

54 - Embossed Matt White



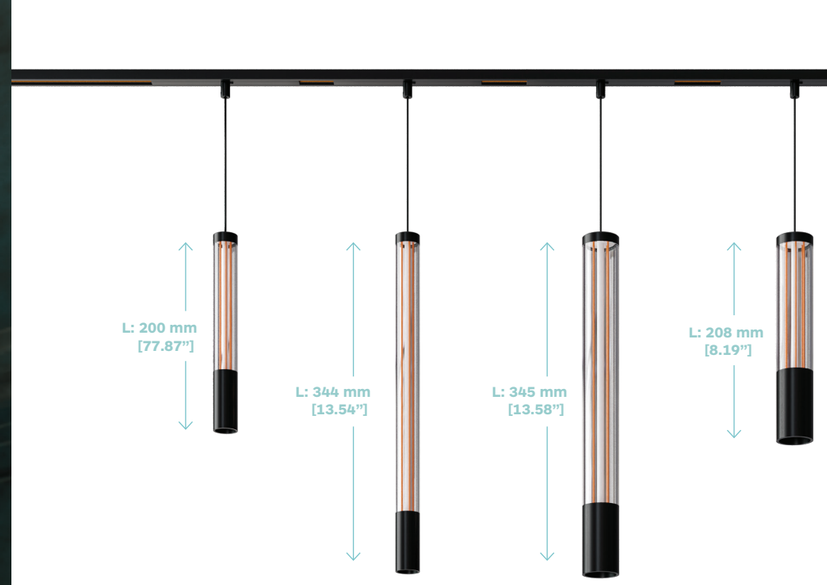

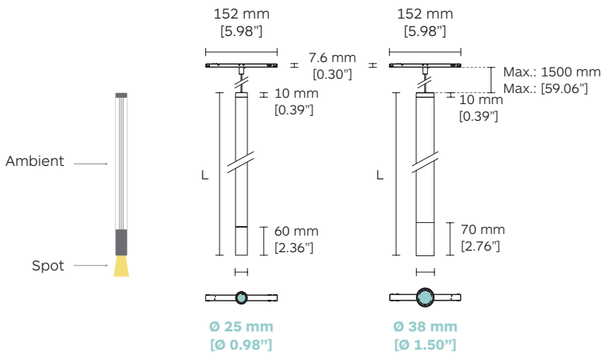



IP20

10 65 11 54

	Product Code	Length Cable Code[1]	LED Power[2]		Nominal Lumen		Beam Angle (BA°)
			Ambient CRI>80 2200K	Spot CRI>90 2700K / 3000K	Ambient CRI>80 2200K	Spot CRI>90 2700K / 3000K	
Pixxo Retro 25 L:200	**T656**	Min. **0100**	4.9W	/	397 lm	/	/
Pixxo Retro 25 L:344	**T657**	⋮	/	2.8W	/	304 lm / 333 lm	**15° / 20° / 32°**
		Max. **1500**					
Pixxo Retro 38 L:208	**T658**		4.9W	/	397 lm	/	/
Pixxo Retro 38 L:345	**T659**		/	6.8W	/	679 lm / 705 lm	**20° / 26° / 36°**

Dimming Options

D0 No Dim

DA Dali Dim

DC CASAMBI

CCT Options

27 2700K

30 3000K

35 3500K

40 4000K

[1] Length cable code from 500mm up to 1500mm. Example: 0500.

[2] 2 control channels, spot light and ambient light can be controlled separately.

formalighting

Pixxo Retro

Micro 48V Track



Pixxo Retro body in glass and extruded aluminum, available in 2 different diameters and 3 different lengths. Combined with the micro range offers different track profiles to give the maximum flexibility to lighting projects.

Pixxo Retro can also be controlled by Casambi DALI Broadcast device, please see pages 54-55 for details.

For complete code ordering information, please see pages 72-75.

LED Sources:

Ambient light:
CRI: 80 | CCT: 2200K.

Spot light:
High Efficacy
CRI: 90 | CCT: 2700K, 3000K, 3500K, 4000K.


Accessories:

For more information about Micro 48V track system accessories see pages 64-65.

- **10** - Black
- **65** - Embossed Matt Black
- **11** - White
- **54** - Embossed Matt White

IP20

10 65 11 54

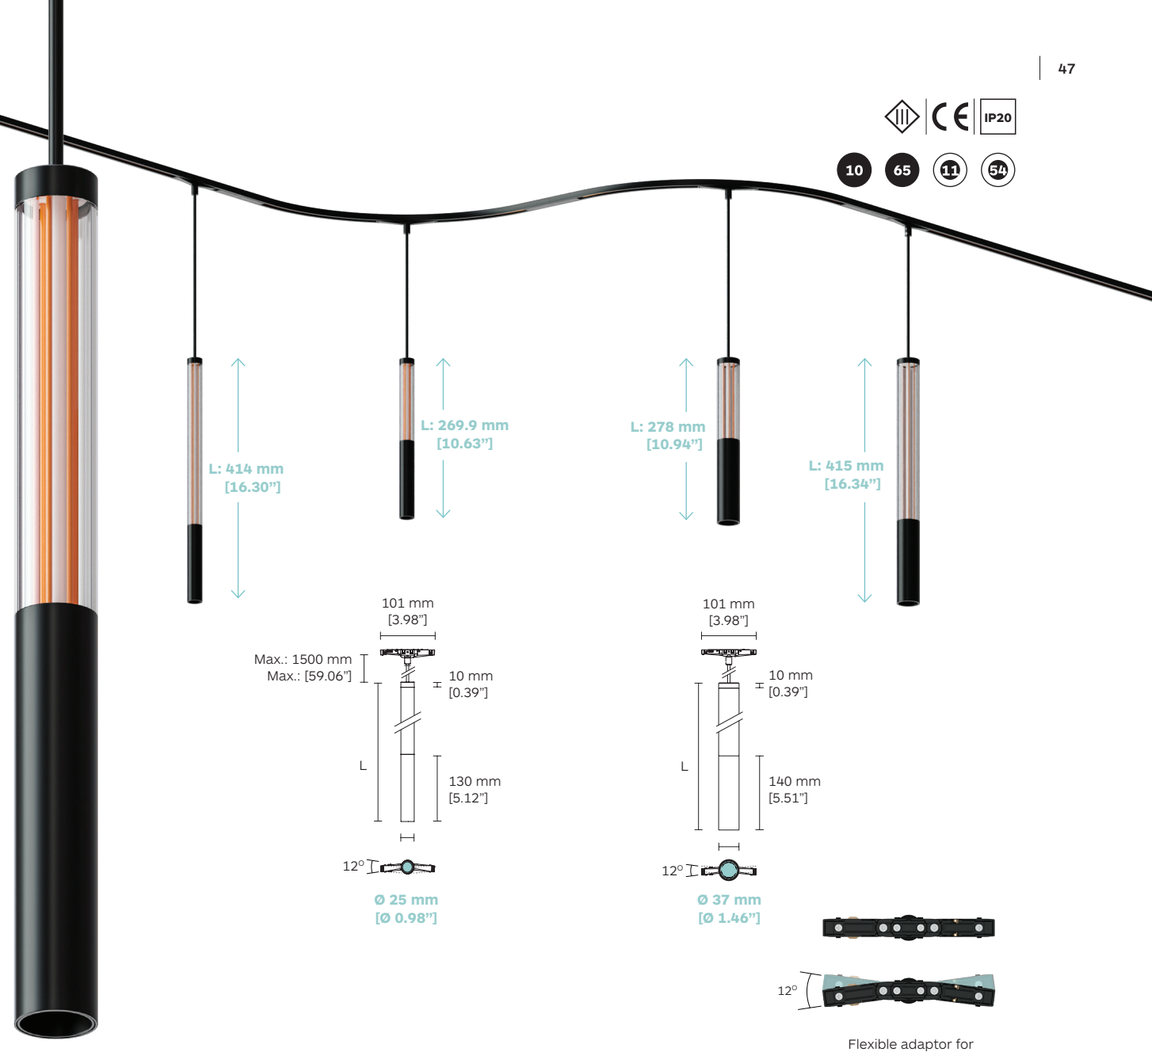

Flexible adaptor for curved track

	Product Code	Length Cable Code[1]	LED Power[2] Ambient CRI>80 2200K	LED Power[2] Spot CRI>90 2700K / 3000K	Nominal Lumen Ambient CRI>80 2200K	Nominal Lumen Spot CRI>90 2700K / 3000K	Beam Angle (BA°)
Pixxo Retro 25 Curved Track L:270	**T6B8**	**0500 1000 1500**	4.9W	/	397 lm	/	/
Pixxo Retro 25 Curved Track L:414	**T6B9**		/	2.8W	/	304 lm / 333 lm	**15° / 20° / 32°**
Pixxo Retro 38 Curved Track L:278	**T6C0**		4.9W	/	397 lm	/	/
Pixxo Retro 38 Curved Track L:415	**T6C1**		/	6.8W	/	679 lm / 705 lm	**20° / 26° / 36°**

Dimming Options

D0 No Dim

CCT Options

27 2700K
30 3000K
35 3500K
40 4000K

[1] Length cable code from 500mm up to 1500mm. Example: 0500.
[2] 2 control channels, spot light and ambient light can be controlled separately.

formalighting

Pixxo
Micro 48V
Track System

Minimal design makes Pixxo pendant the perfect solution for the hospitality and residential projects when combined with the ultra-compact Micro track system that results in a solution that can make a difference in lighting projects where aesthetics and attention to detail are fundamental.

Pixxo

Micro 48V Track



- **10** - Black
- **65** - Embossed Matt Black
- **11** - White
- **54** - Embossed Matt White

Pixxo Micro Track 48V is the new suspension solution for 48V track. Light body is available in two diameters (25 and 36mm) and different lengths, to fit any ceiling height. Exchangeable front rings in a wide range of colors make Pixxo extremely applicable for every project.

Pixxo is available with Casambi and DALI control options. DALI dimmable fixtures can also be controlled by Casambi DALI Broadcast device, please see pages 54-55 for details.

For complete code ordering information, please see pages 72-75.

LED Sources:


High Efficacy:
CRI: 90 | CCT: 2700K., 3000K, 3500K, 4000K.

Accessories:

For more information about Micro 48V track system accessories see pages 64-65.

IP20

10 65 11 54

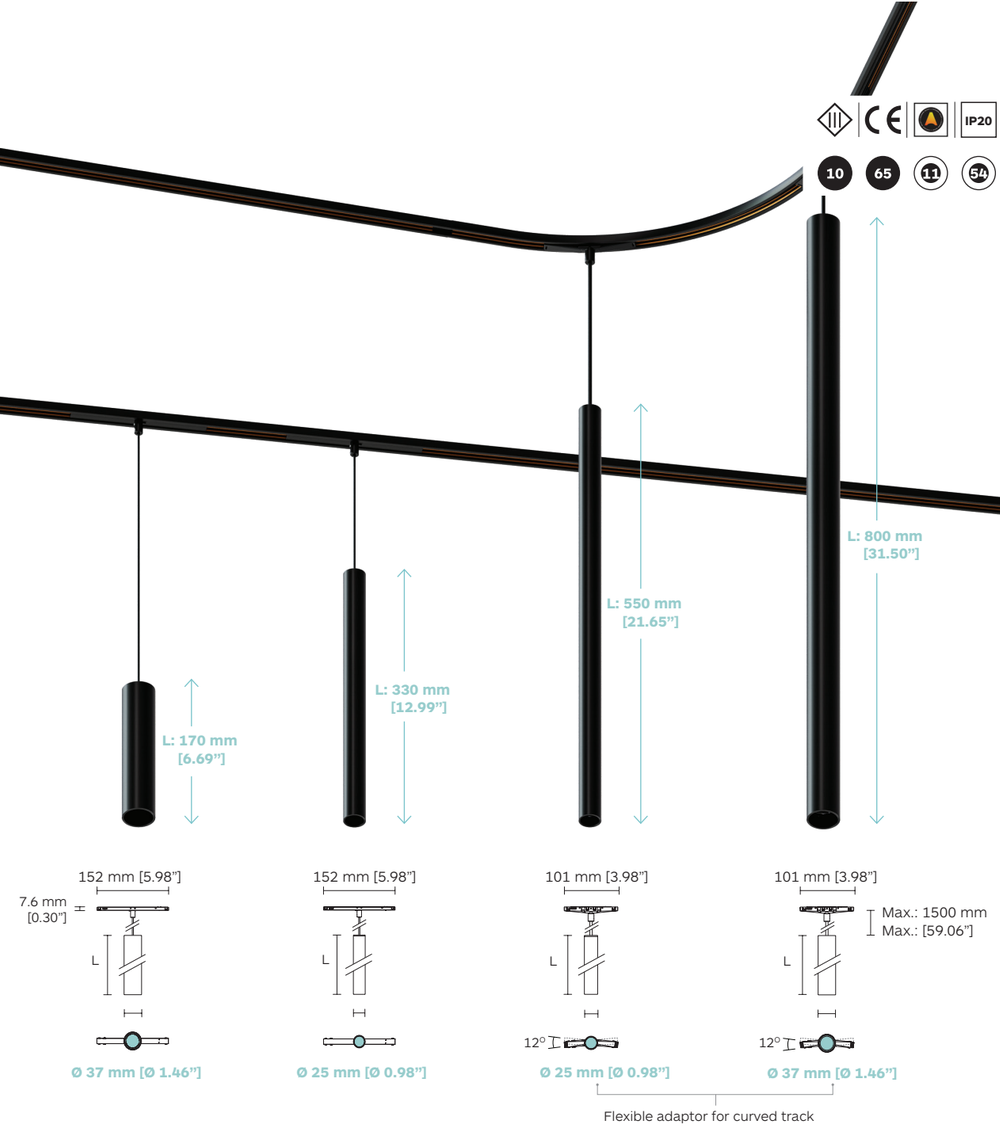

		Product Code		Product Length (L)	Light Source Code	LED Power	Nominal Lumen	Beam Angle (BA°)
		straight adaptor	curved adaptor					
CRI>90 3000K High Efficacy	Pixxo 25	**T703**	**T739**	170	**BR21**	2.8W	333 lm	**15°** / **20°** / **32°**
		T704	**T740**	330				
		T705	**T741**	550				
		T706	**T742**	800				
	Pixxo 36	**T707**	**T745**	170	**BC35**	5W	517 lm	**20°** / **26°** / **36°**
		T708	**T746**	330				
		T709	**T747**	550				
		T710	**T748**	800				

Dimming Options


- **D0** No Dim
- **DA** Dali Dim
- **DC** CASAMBI

CCT Options

- **27** 2700K
- **30** 3000K
- **35** 3500K
- **40** 4000K

TicTok & Viivo

The circular series

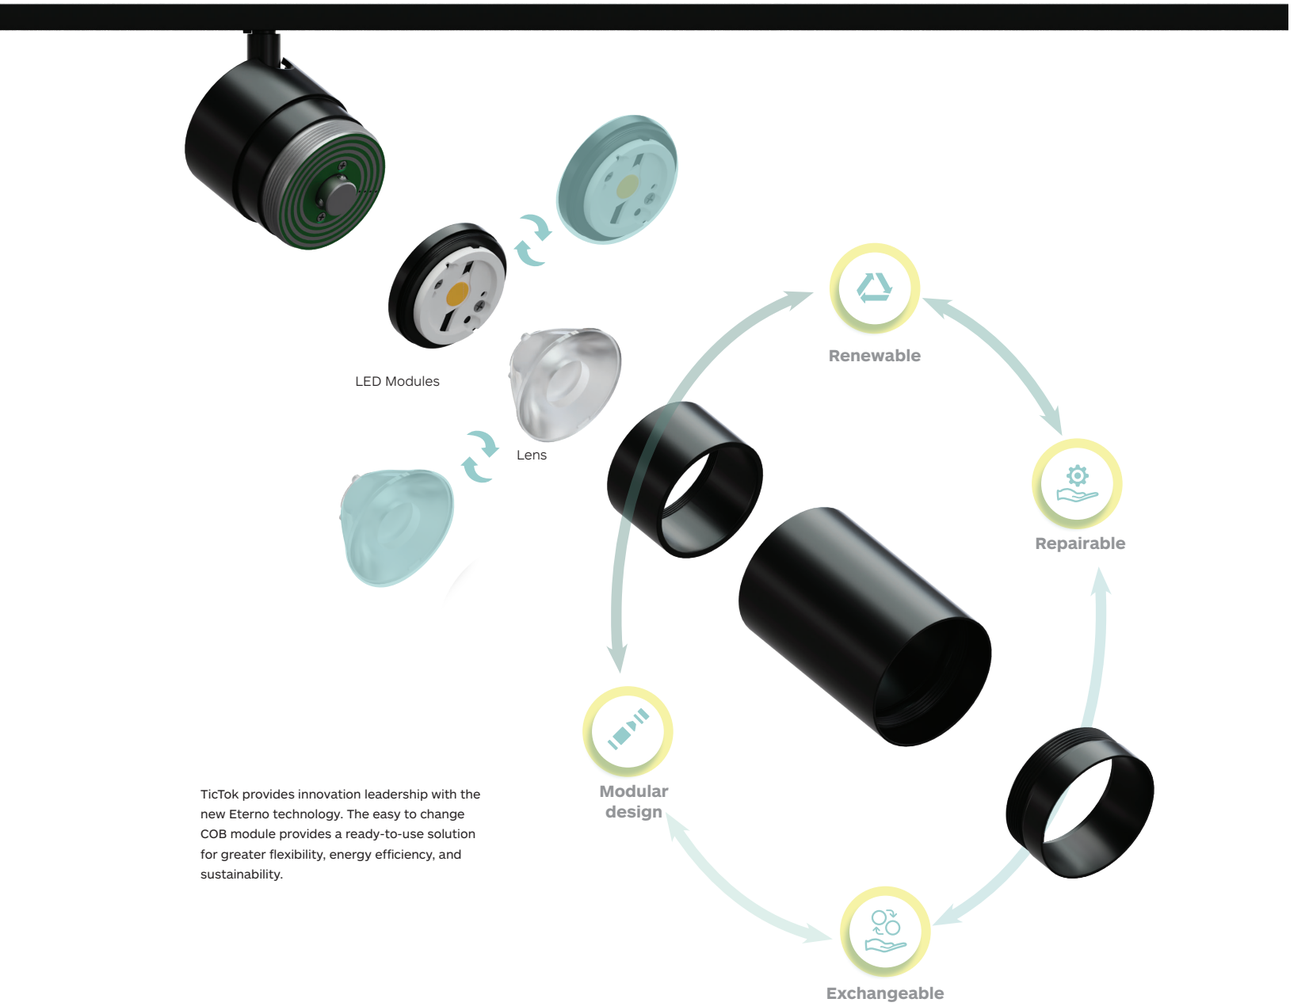

TicTok provides innovation leadership with the new Eterno technology. The easy to change COB module provides a ready-to-use solution for greater flexibility, energy efficiency, and sustainability.

LED Modules & Lens compatibility

For TicTok & Viivo products

Product compatibility	LED Module	CRI	LED Power	LENS Compatibility Code		
				15°	**20°**	**32°**
TicTok 25 & Twins Code: T6B2 I T6J8	**E017**	CRI› 90	3.4W	L021	L022	L023
Viivo 25 & Twins Code: T6A8 I T6K6	[1] **E017**	CRI› 90	2 x 3.4W	L021	L022	L023

[1] LED Module **E017, 2 x 3.4W** available for code T6J8 & T6K6.

				16°	**24°**	**34°**
TicTok 35 & Twins Code: T6B3 I T6J9	**BH23**	CRI› 90	2 x 5.2W	L049	L050	L051
Viivo 35 & Twins Code: T6A9 I T6K7						

				12°	**18°**	**26°**	**36°**	**38°**
TicTok 45 Codes: T662 I T6B4 **Viivo 45** Code: T6B0	**E091**	CRI› 90	9W	/	L043	L044	L045	/
	JC02	CRI› 97	10W	L043	/	/	/	/
		CRI› 97	9W	/	L043	L044	/	L045

				12°	**18°**	**24°**	**25°**	**34°**	**35°**
TicTok 58 Codes: T664 I T6B5 **Viivo 58** Code: T6B1	**E093**	CRI› 90	11W	L004	/	/	/	/	/
	E097	CRI› 90	14W	/	L004	/	L005	/	L006
	JC01	CRI› 97	14W	/	/	L041	/	L042	/
	JC01	CRI› 97	15W	L040	L041	/	/	/	/

Casambi DALI Broadcast



Micro 48V Track System

www.formalighting.com

Casambi DALI Broadcast


For Micro track 48VDC input


Casambi DALI Broadcast offers a cutting-edge solution for controlling wireless luminaires on low-voltage (48V) tracks.

Through Casambi Bluetooth Low Energy (BLE) communication with control apps, all you need is a smartphone or tablet to take charge of your lighting system.

Imagine having complete control over the lighting in your space without the hassle of wiring, control units, or routers. With Casambi Broadcast technology, this dream is now a reality.

Group Configuration - up to 64 luminaires

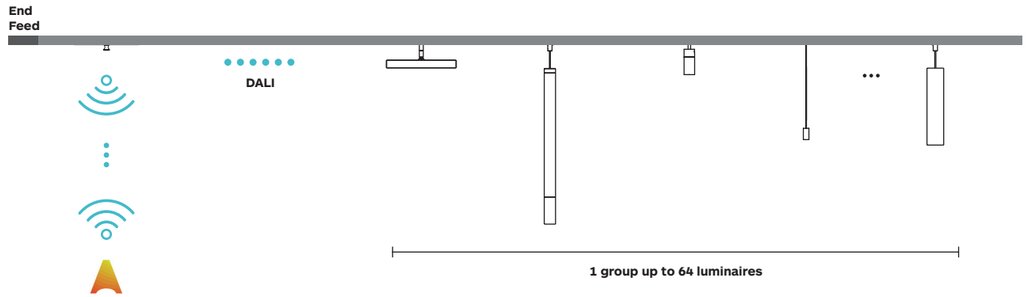










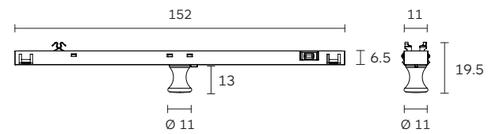


	Wireless control device
Code:	**T269**
Nominal Input Voltage:	24-50 Vdc
Current:	48V - 0.06 A
Output Voltage:	18 - 18.5 V DC
Output current in short circuit:	200 mA
Output channel:	1
Management protocol:	DALI

formalighting

Micro 48V Track Options


1. Pendant Track

2STB




2. Pendant Track

2STC




3. Recessed Track Plank

2STD




4. Recessed Track

2STJ




5. Surface Track


2STE



6. Pendant Kit

9268



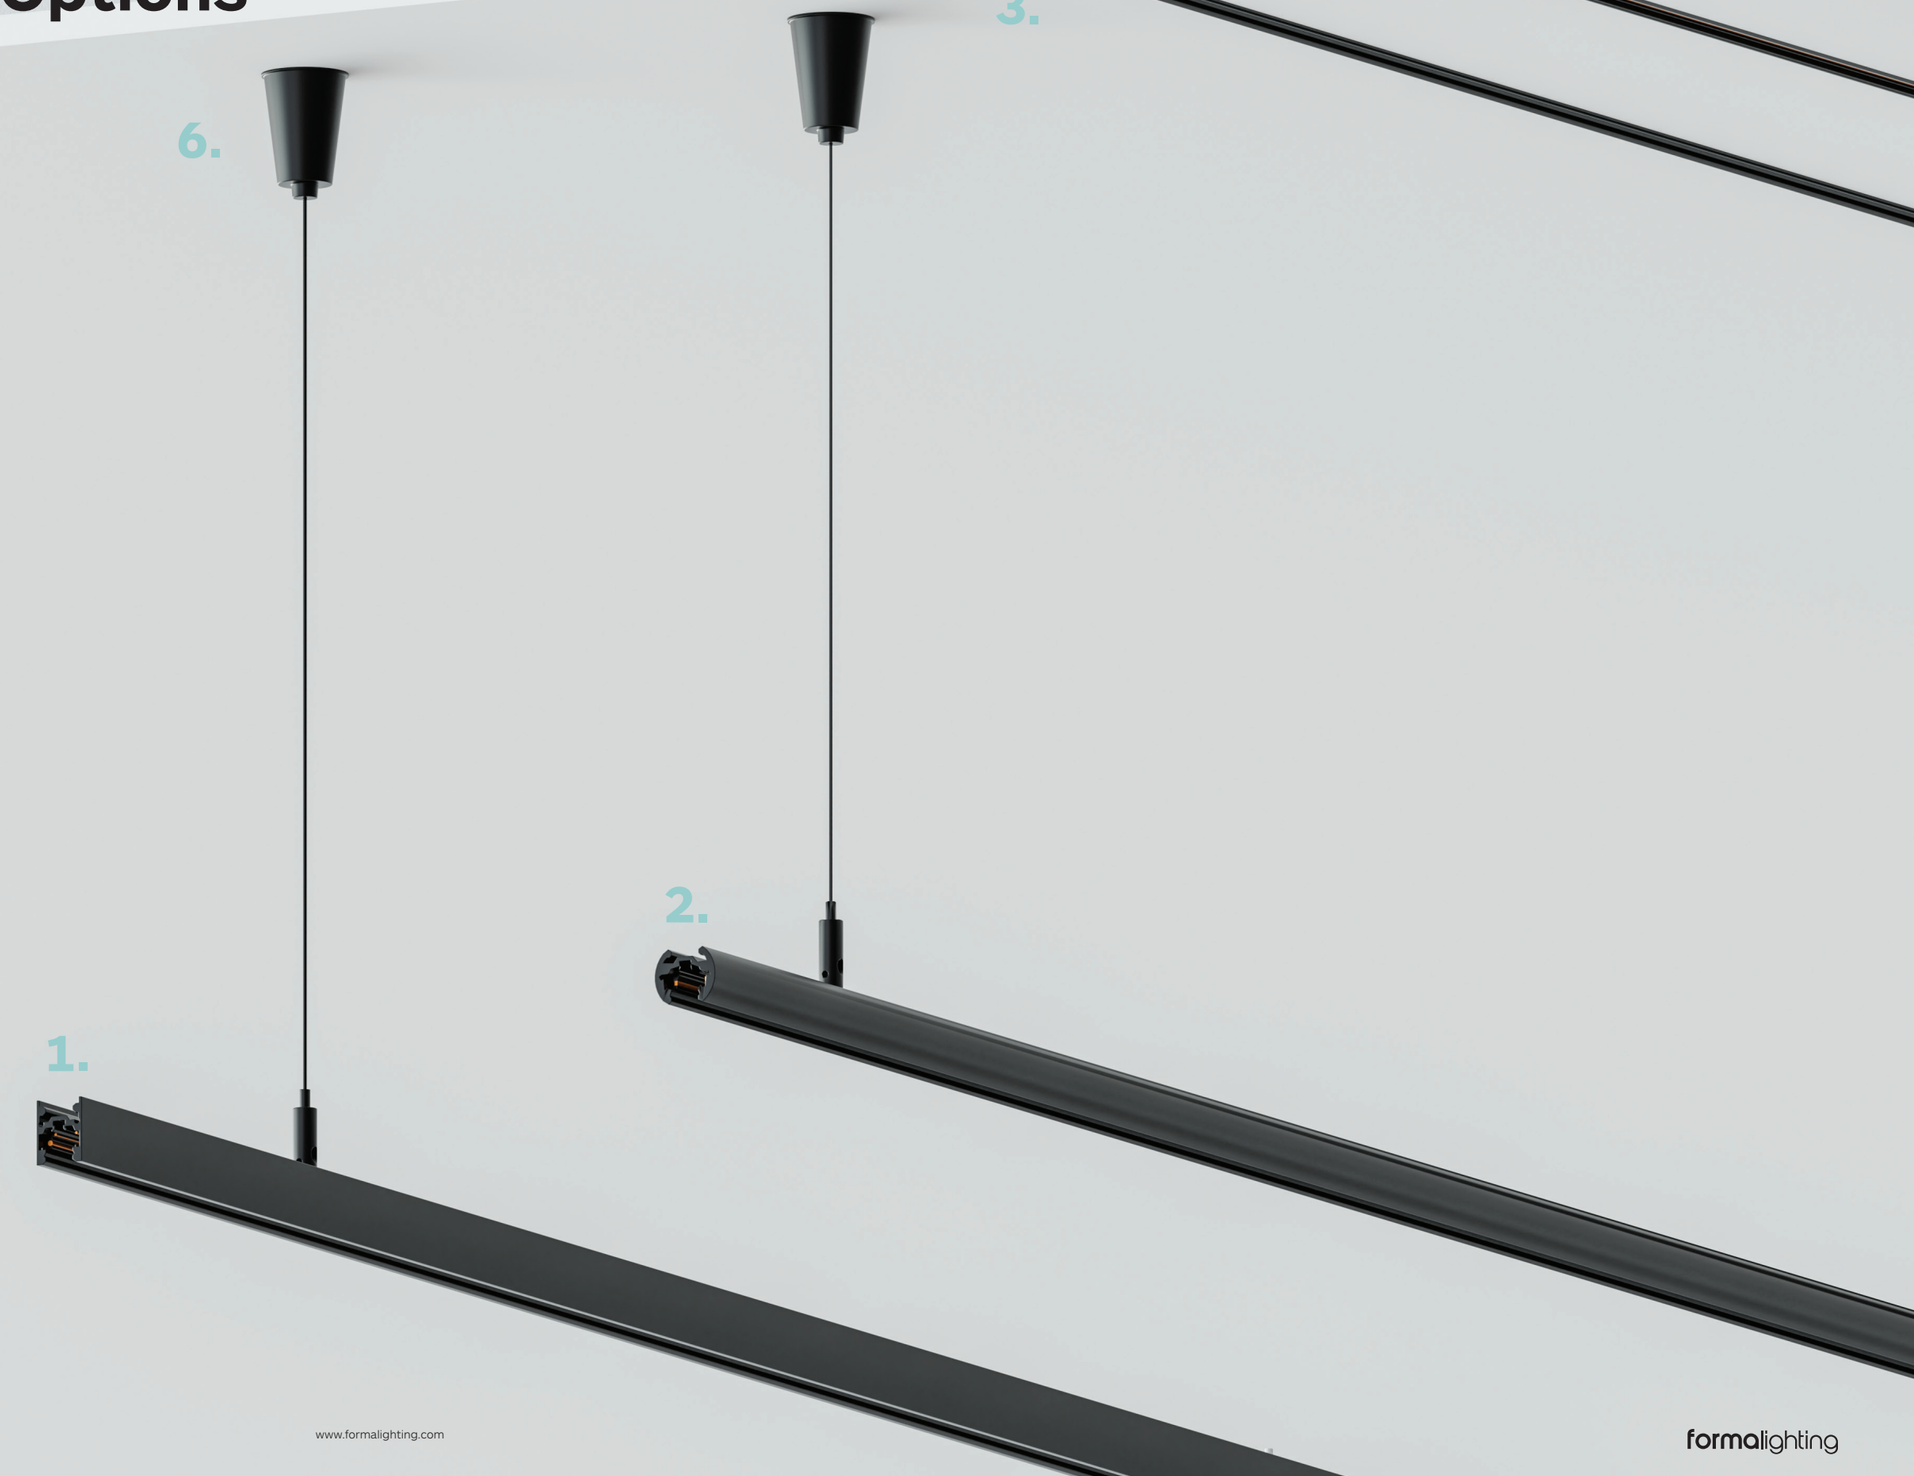

Micro 48V Curved Track



Limitless design flexibility, curved adaptor tailor-made for the micro track curved track allows a wide range of luminaires on the curved tracks. Horizontal curved tracks are available in radii of 300mm and 500mm, and vertical curved tracks in radii of 300mm to fulfill any design configuration.

Horizontal curved track

2STF

2STG



Horizontal curved track



Vertical curved track




Micro 48V Track System

Micro Curved Track Compatibility


Horizontal
curved track





	2STF	**2STG**
TicTok Twins 25 / 35	/	/
TicTok 25 / 35 / 45 / 58	For TicTok 45 & 58 ✓	For TicTok 45 & 58 ✓
Viivo Twins 25 / 35	/	/
Viivo 25 / 35 / 45 / 58	On Request	On Request
TicTok 45 / 58 **Zoom**	✓	✓
Zero 12	/	/
Zero 33	/	/
Zero Framing Projector 18 / 28	/	/
Polaris 20 Adjustable Polaris 20 Wallwasher Polaris 20 Polaris 20 Opal Diffuser	/	/
Pixxo 25 / 36	✓	✓
Pixxo Retro 25 / 38	✓	✓


formalighting

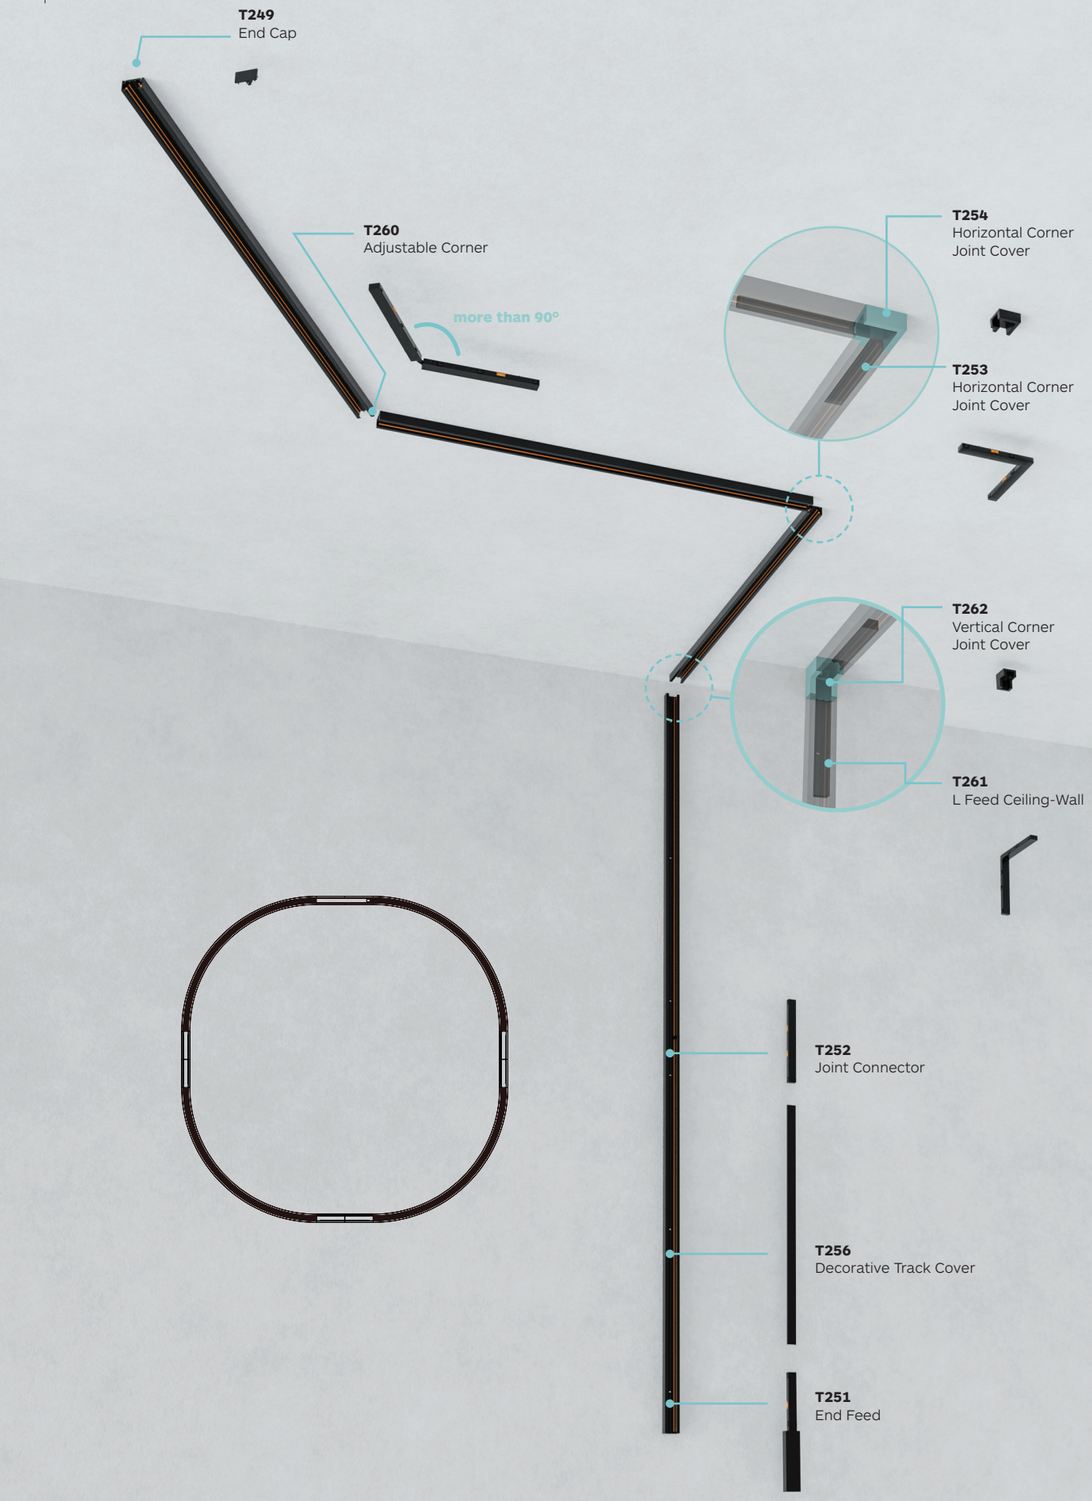

Micro Track System Accessories




T249 End Cap for 2STE & 2STJ Track






T250 End Cap for 2STB Track






T251 End Feed






T252 Joint Connector






T253 Horizontal Corner Joint Cover






T254 Horizontal Corner Joint Cover






T255 Bracket






T256 Decorative Track Cover for 2STB, 2STC, 2STD






T257 End Cap for 2STD Track






T258 End Cap for 2STC Track






T259 End Feed






T260 Adjustable Corner






T261 L Feed Ceiling-Wall






T262 Vertical Corner Joint Cover






T263 Template for Track Installation





T264 Decorative Track Cover for 2STE



formalighting

Power Supply & Control Options


Power Supply






	220-240VAC input, 48VDC output 70w power supply for low voltage track	220-240VAC input, 48VDC output 150w power supply for low voltage track
Code	**2G35**	**2G36**


Universal DALI

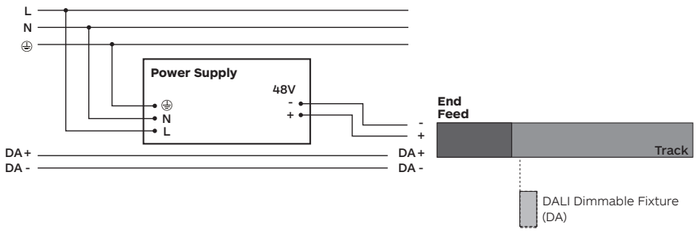

Bluetooth wireless Control

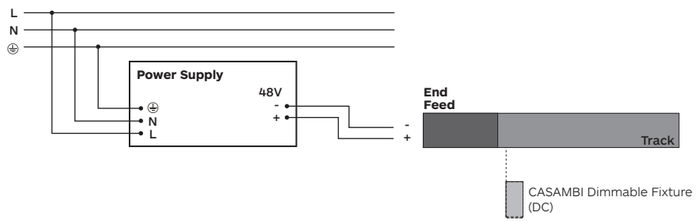

Fixed Output

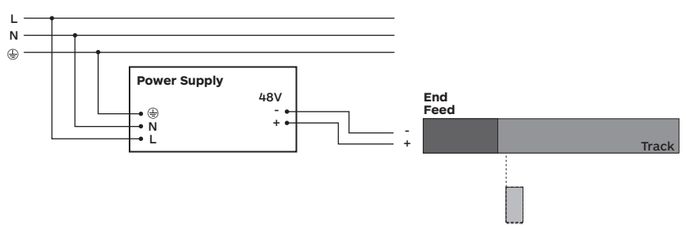


Drop Voltage Table

	A Distance power supply/feed unit (2x1.5mm²)			
	5m	10m	20m	30m
	B Track Length with Δv≤5.5% (m)			
Power Supply (W)	(m)	(m)	(m)	(m)
60	50	50	50	50
100	50	50	40	25
150	50	40	20	Not admitted
200	40	30	Not admitted	Not admitted
250	35	20	Not admitted	Not admitted

Information refers to a load equivalent to the power supplied and equally distributed on the relevant lenght in the table.

Remote Power Supply

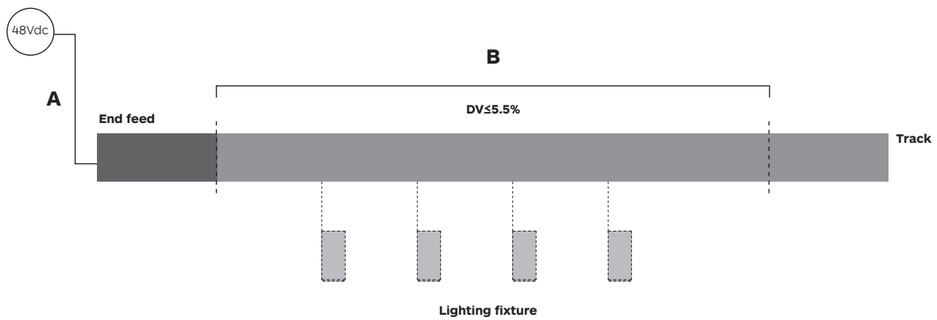

Symbols & Icon Code System Global presence

Symbols & Icons

CLASS I
Luminaires of insulation Class I - with earth connector.

CLASS II
Luminaires of insulation Class II - With safety isolation, this means the tension conductions element are protected by additional isolation.
The isolation of an earth wire it is not necessary and the connection to it is not allowed.

CLASS III
Luminaires of isolation Class III - designed for operation of protected low voltage supply (>42V).

Zoom

Passes the 850° glow wire test in accordance with IEC 695-2-1.

Passes the 960° glow wire test in accordance with IEC 695-2-1.

Dim2Warm

Tuneable White

CASAMBI

Recyclable

Symbols & Icons

European Economic Area
Declares that the product complies with all applicable European Union safety, health, and environmental protection requirements.

Canada US
Indicates that the product has been tested and meets Canadian and North American standards requirements standards for safety and performance.

Canada US
Component Recognition Mark indicates compliance with both Canadian and U.S. requirements.


IP_ _ Degree of Ingress Protection

1st Number	Protection Against Dust and Solid Objects	2nd Number	Protection Against Moisture and Liquids
0	No-Protection	**0**	No-Protection
1	Protection against solid objects >50 mm	**1**	Protection against dripping water
2	Protection against solid objects >12 mm	**2**	Protection against dripping water tilted > 15 deg
3	Protection against solid objects >2.5 mm	**3**	Protection against spraying water > 30 deg
4	Protection against solid objects >1 mm	**4**	Protection against spraying water
5	Dust - protected	**5**	Protection against water jet
6	Dust - tight	**6**	Protection against waves
		7	Protection against the effects of immersion
		8	Protection against submersion


Body Color




1Y Embossed Matt Total White (RAL 9016)




54 Embossed Matt White (RAL 9016)




65 Embossed Matt Black (RAL 9017)




10 Black (RAL 9004)




11 White (RAL 9003)




27 Chrome Polished




1A Chrome Gold




79 Brushed Alumnium [1]



3G Brushed Brass [1]



3H Antique Brass [1]



3J Blackened Brass [1]


Notes:

[1] *Finish available for Viivo fixtures only.*

formalighting

Code System for Standard Products

Code ordering example: T 9 6 3 BR 21 - 90 30 BS DA 54

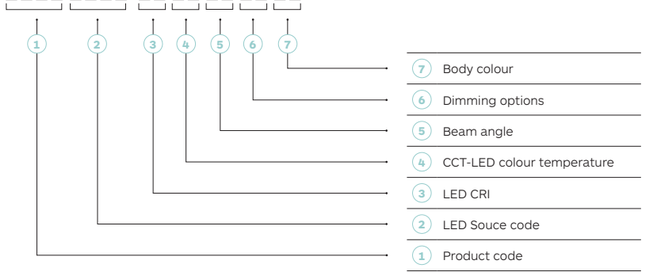

LED CRI		CCT-LED Colour temperature		Dimming Options		Body Colour	
80	CRI > 80	**27**	Warm White 2700K	**D0**	No dimming	**10**	Black (RAL 9004)
90	CRI > 90	**30**	Warm White 3000K	**DA**	Dali Dim	**11**	White (RAL 9003)
93	CRI > 93	**35**	Warm White 3500K	**DC**	CASAMBI	**1A**	Chrome Gold
97	CRI > 97	**40**	Neutral White 4000K	**DN**	On-board Dimmer	**54**	Embossed Matt White (RAL 9016)
98	CRI > 98	**TW**	Tuneable White 2700K - 5700K			**65**	Embossed Matt Black (RAL 9017)

How to order



10 - Black
65 - Embossed Matt Black
11 - White
54 - Embossed Matt White


	Product Code	LED Source Code	LED Power	Nominal Lumen	Beam Angle (BA°)	Dimming Options	CCT Options
Zero 33	**T963**	**BR21**	4.5W	448 lm	**BS** (8 - 80°)	**DA** Dali Dim **D0** No Dim **DC** CASAMBI **DN** On board Dim	**27** 2700K **30** 3000K **35** 3500K **40** 4000K

CRI>90 / 3000K — High Efficacy

1	Product code	**T963**
2	LED Module code	**BR21**
3	LED CRI	**90**
4	CCT-LED colour temperature	**30**
5	Beam angle	**BS**
6	Dimming options	**DA**
7	Body colour	**54**


Code System for Pixxo Retro Products

Code ordering example: T 6 5 7 1 5 0 0 - 9 0 3 0 2 0 D C 5 4

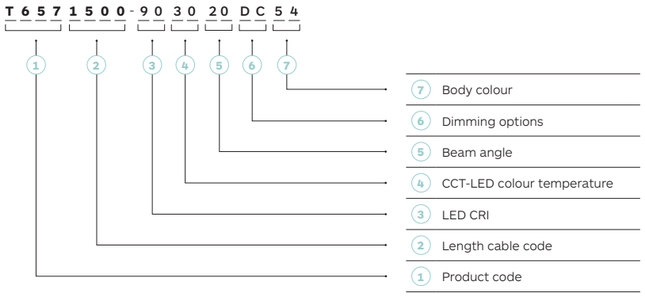

LED CRI		CCT-LED Colour temperature		Dimming Options		Body Colour	
80	CRI > 80	**27**	Warm White 2700K	**D0**	No dimming	**10**	Black (RAL 9004)
90	CRI > 90	**30**	Warm White 3000K	**DA**	Dali Dim	**11**	White (RAL 9003)
93	CRI > 93	**35**	Warm White 3500K	**DC**	CASAMBI	**1A**	Chrome Gold
97	CRI > 97	**40**	Neutral White 4000K	**DN**	On-board Dimmer	**54**	Embossed Matt White (RAL 9016)
98	CRI > 98	**TW**	Tuneable White 2700K - 5700K			**65**	Embossed Matt Black (RAL 9017)

How to order

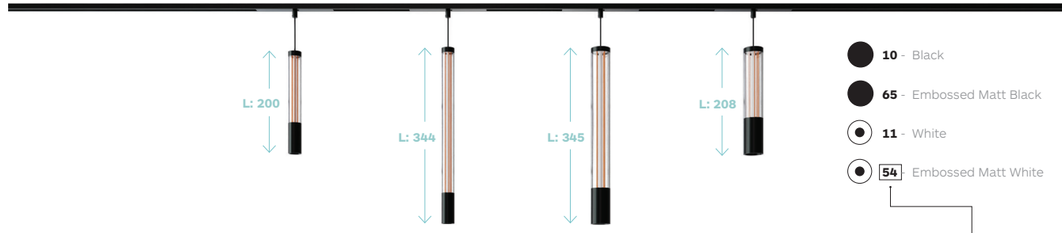

10 - Black
65 - Embossed Matt Black
11 - White
54 - Embossed Matt White


	Product Code	Length Cable Code[1]	LED Power Ambient CRI>80 2200K	LED Power Spot CRI>90 2700K / 3000K	Nominal Lumen Ambient CRI>80 2200K	Nominal Lumen Spot CRI>90 2700K / 3000K	Beam Angle (BA°)	Dimming Options	CCT Options
Pixo Retro 25 L:200	**T656**	Min. **0100**	4.9W	/	397 lm	/	/	**D0** No Dim **DA** Dali Dim **DC** CASAMBI	**27** 2700K **30** 3000K **35** 3500K **40** 4000K
Pixo Retro 25 L:344	**T657**	Max. **1500**	/	2.8W	/	304 lm / 333 lm	**15° / 20° / 32°**		

1	Product code	**T657**
2	Length Cable Code	**1500**
3	LED CRI	**90**
4	CCT-LED colour temperature	**30**
5	Beam angle	**20**
6	Dimming options	**DC**
7	Body colour	**54**

formalighting

Code System for TicTok Products

Code ordering example: **T 6 B 2 E 0 1 7 - 9 0 3 0 1 5 D 0 6 5**

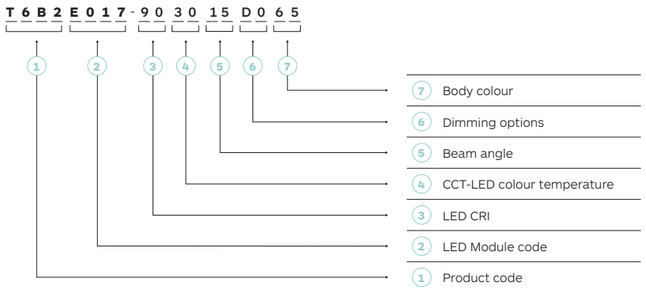

LED CRI

90	CRI > 90
97	CRI > 97

CCT-LED Colour temperature

27	Warm White 2700K
30	Warm White 3000K
35	Warm White 3500K
40	Neutral White 4000K

Dimming Options

D0	No Dim
DA	Dali Dim
DC	CASAMBI
DN	On board Dim
D1	0-10V Dim
DR	Dim by Power Supply Unit (PSU)


Body Colour

1Y	Embossed Matt Total White RAL (9016)
54	Embossed Matt White RAL (9016)
65	Embossed Matt Black RAL (9017)
27	Chrome Polished

How to order




65 - Embossed Matt Black
54 - Embossed Matt White
1Y - Embossed Matt Total White
27 - Chrome Polished

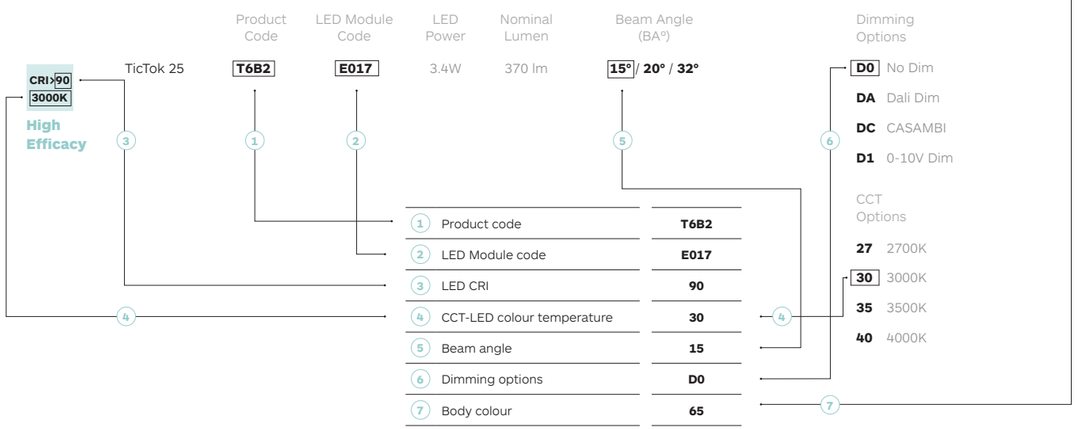

Code System for Viivo Products

Code ordering example: **T 6 A 9 E 0 6 3 - 9 0 3 0 3 4 D C 6 5**

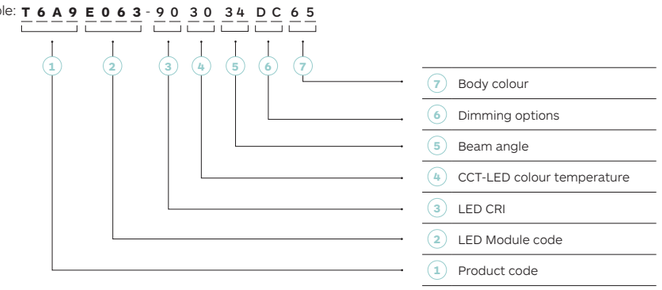

LED CRI

90	CRI > 90
97	CRI > 97

CCT-LED Colour temperature

27	Warm White 2700K
30	Warm White 3000K
35	Warm White 3500K
40	Neutral White 4000K


Dimming Options

D0	No Dim
DA	Dali Dim
DC	CASAMBI
DN	On board Dim
D1	0-10V Dim
DR	Dim by Power Supply Unit (PSU)


Body Colour

1Y	Embossed Matt Total White RAL (9016)
54	Embossed Matt White RAL (9016)
65	Embossed Matt Black RAL (9017)
27	Chrome Polished
1A	Chrome Gold
79	Brushed Aluminium
3G	Brushed Brass
3H	Antique Brass
3J	Blackened Brass

How to order

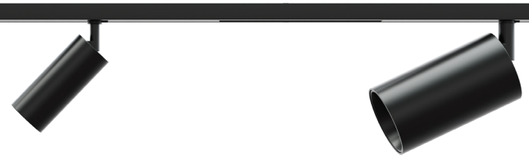

65 - Embossed Matt Black
54 - Embossed Matt White
1Y - Embossed Matt Total White
1A - Chrome Gold
27 - Chrome Polished
79 - Brushed Aluminium
3G - Brushed Brass
3H - Antique Brass
3J - Blackened Brass

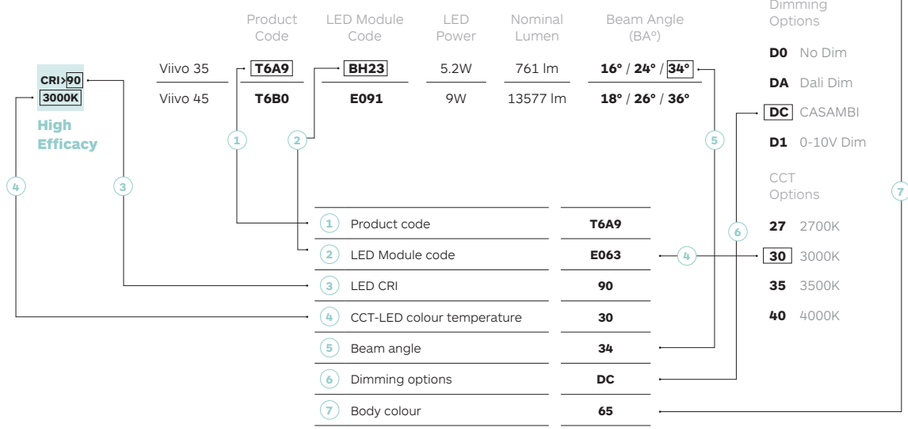

Global presence

Celebrating over 50 years of vision, dedication and innovation, formalighting's versatile and high-quality product offerings extends internationally via our headquarters in Hong Kong, London, Milan and Shanghai.
Our well chosen and selected partners as well as our affiliated international offices broaden our global presence further in markets such as USA, Australia, Japan, South East Asia, India and the Middle East.

Through our commitment to growth and investment within formalighting's professional team, infrastructure and product ranges, we are able to provide increasing service to our global retail and hospitality clients as well as lighting designers and specifiers strengthening our position as a leading international supplier of innovative architectural lighting solutions and systems.

With over 50 years' experience in designing and manufacturing architectural lighting, formalighting's comprehensive portfolio offers a competitive range of European designed and expertly engineered products that carry CB, CE, CCC and UL certifications.

Furthermore formalighting's latest award-winning motorized range of track, pendant, and recessed fixtures, featuring remote-controlled adjustable pan and tilt, dim, dim to warm, tuneable white and beam shaping lens, are available worldwide incorporating the latest, most advanced lighting technologies.

MILAN
EUROPE HEADQUARTERS

Tel (+39) 02 9354 0300

Fax (+39) 02 9343 5117

E- mail info-europe@formalighting.com

HONG KONG
ASIA HEADQUARTERS

Tel (+ 852) 2516 6500

Fax (+ 852) 2516 6525

E- mail info-asia@formalighting.com

NEW YORK
LOCAL SALES OFFICE

E- mail info-us@formalighting.com

SHANGHAI
LOCAL SALES OFFICE

E- mail info-china@formalighting.com

LONDON
LOCAL SALES OFFICE

E- mail info-uk@formalighting.com

AUSTRALIA
LOCAL SALES OFFICE

Tel (+61) 488 567 388

E- mail info-australia@formalighting.com

INDIA
LOCAL SALES OFFICE

Tel (+91) 9686351257

E- mail info-india@formalighting.com

formalighting is constantly developing and improving its products therefore all information, drawings illustrations, specifications, photometric values in this catalogue are indicative and shall not form part of any commitment by our company that reserves the right to change specifications without prior notification or public announcement.
Technical information on the installation-instruction has precedence over the information in the catalogue.
Our general terms and conditions shall apply notwithstanding any stipulation on the contrary to all the orders and agreement with formalighting. You can obtain a copy of these conditions on demand.

Publication date: November 2026.

©Copyright formalighting

With thanks to all contributors for the realization of this catalogue.

Designed by formalighting's Graphic Design Department.

No part of this catalogue may be copied without written authorization of formalighting.

formalighting

MILAN

-

LONDON

-

USA

-

HONG KONG

-

SHANGHAI

-

INDIA