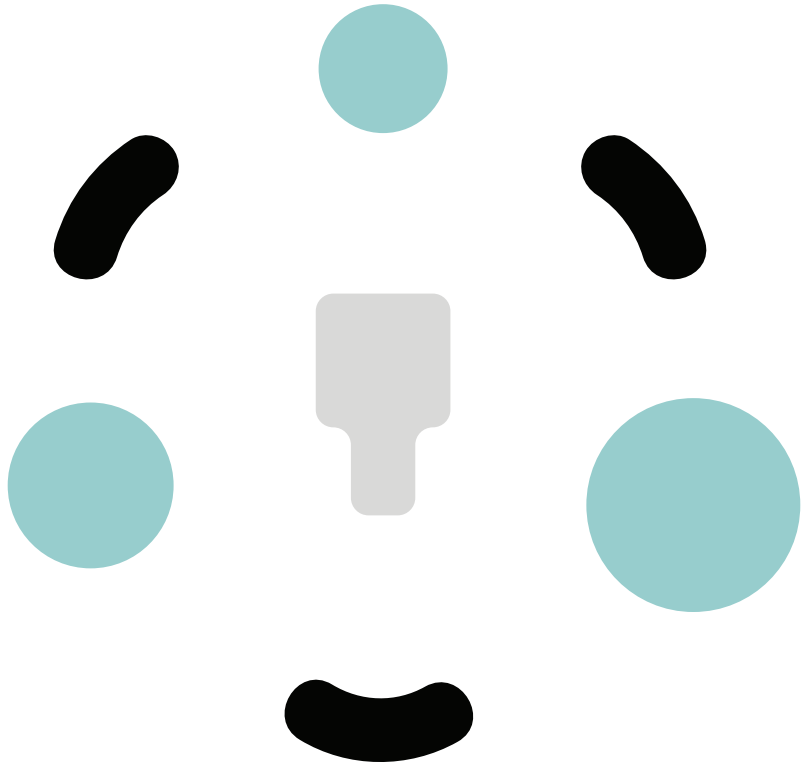


formalighting

TicTok & Viivo
Mono Point Series

2026

TicTok & Viivo
The Mono Point Series


Ceiling Surface


Recessed
Trim & Trimless

Trimless (for Millwork)


Softrack surface-mounted
with external wiring


Viivo Series

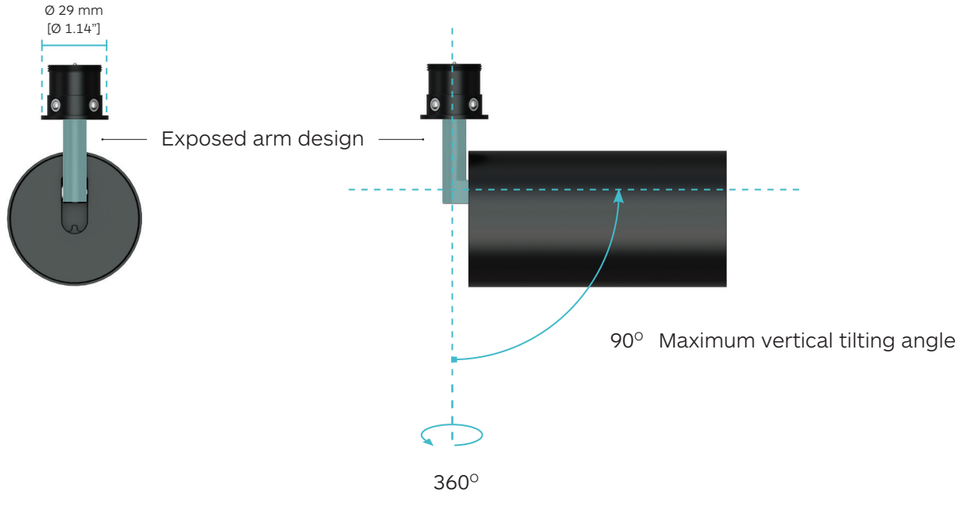

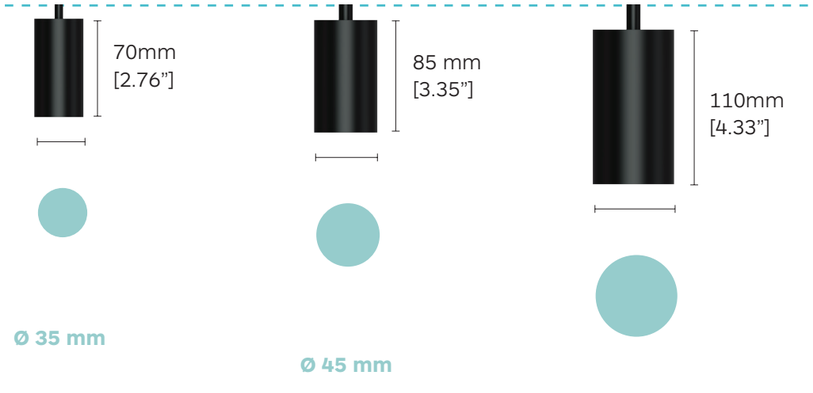

TicTok Series

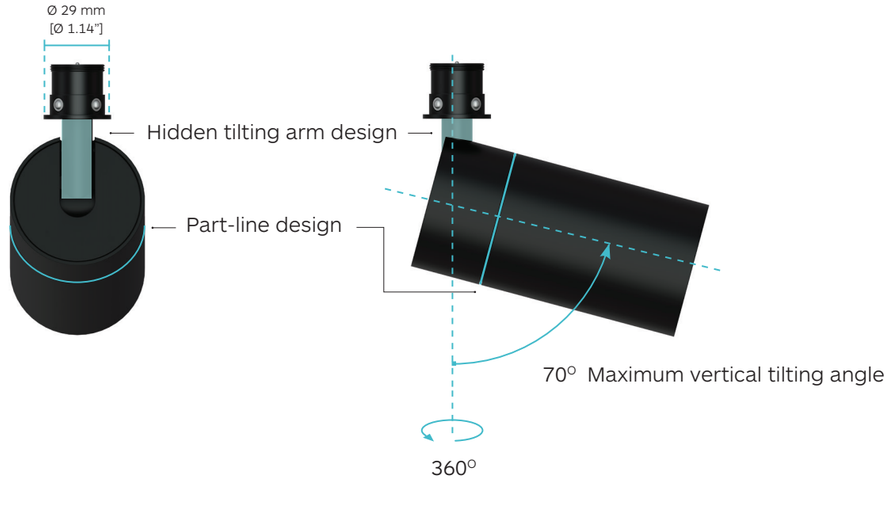


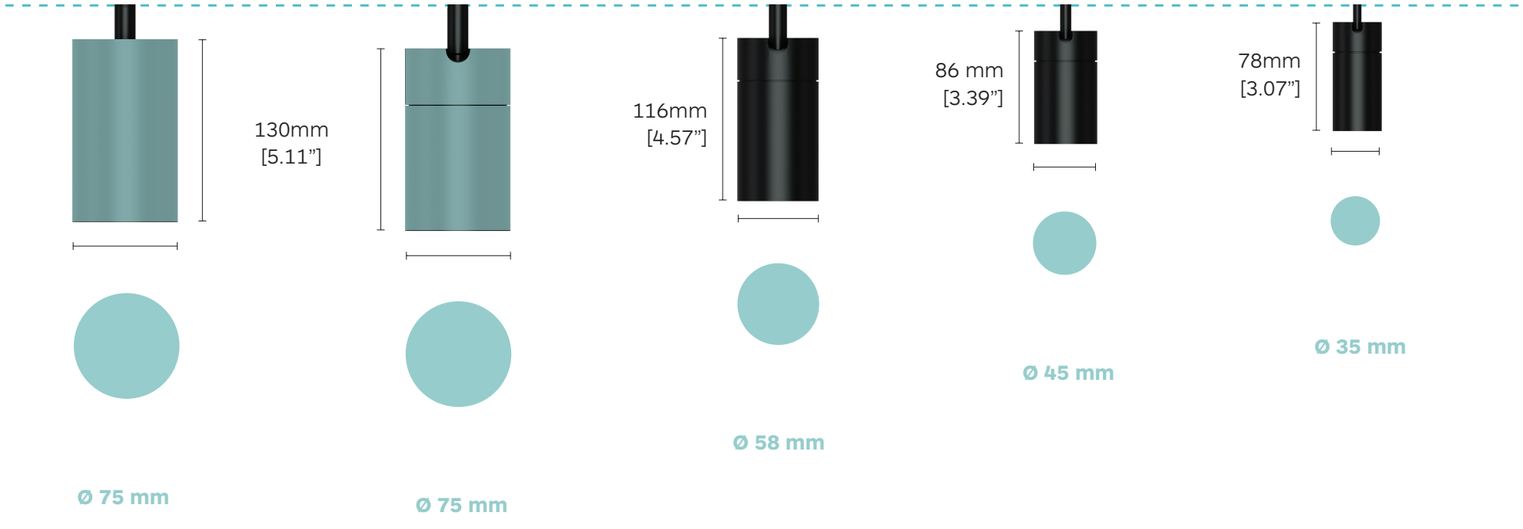

formalighting

Mono Point Index

Surface Mounting








Mounting Options

Page 10 - 13

Recessed Trimless





Recessed Trim





Fixture Options

TicTok Series - Page 22 - 25
Viivo Series - Page 26 - 29




2J18
Decorative Metal Cover
(To be ordered separately)

Accessories

Page 30

Trimless (for Millwork)

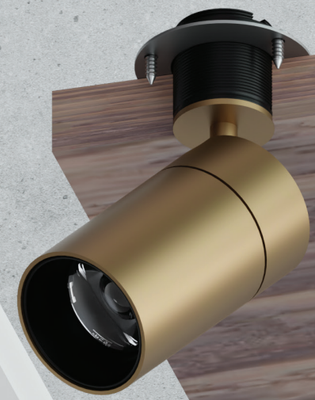



formalighting

Mono Point Index

Fixture Options

TicTok Series - Page 22 - 25
Viivo Series - Page 26 - 29

Mounting Options

Page 10 - 13

Accessories

Page 30

Softrack surface-mounted
with external wiring

formalighting

Mono Point Mounting Options


Choose your **mounting option**


48V

Recessed
Trim

Art. 2H93 [1]









Recessed
Trimless

Art. 2H92 [1]










Trimless
(for Millwork)

Art. 2H86 [1]

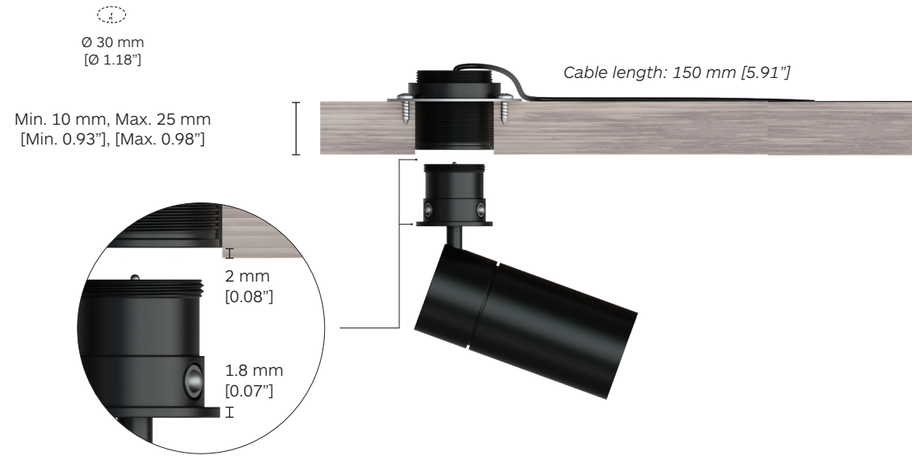






[1] Mounting options are ordered separately.

Mono Point Mounting Options

Surface Mounting

Art. 2H87 [1]

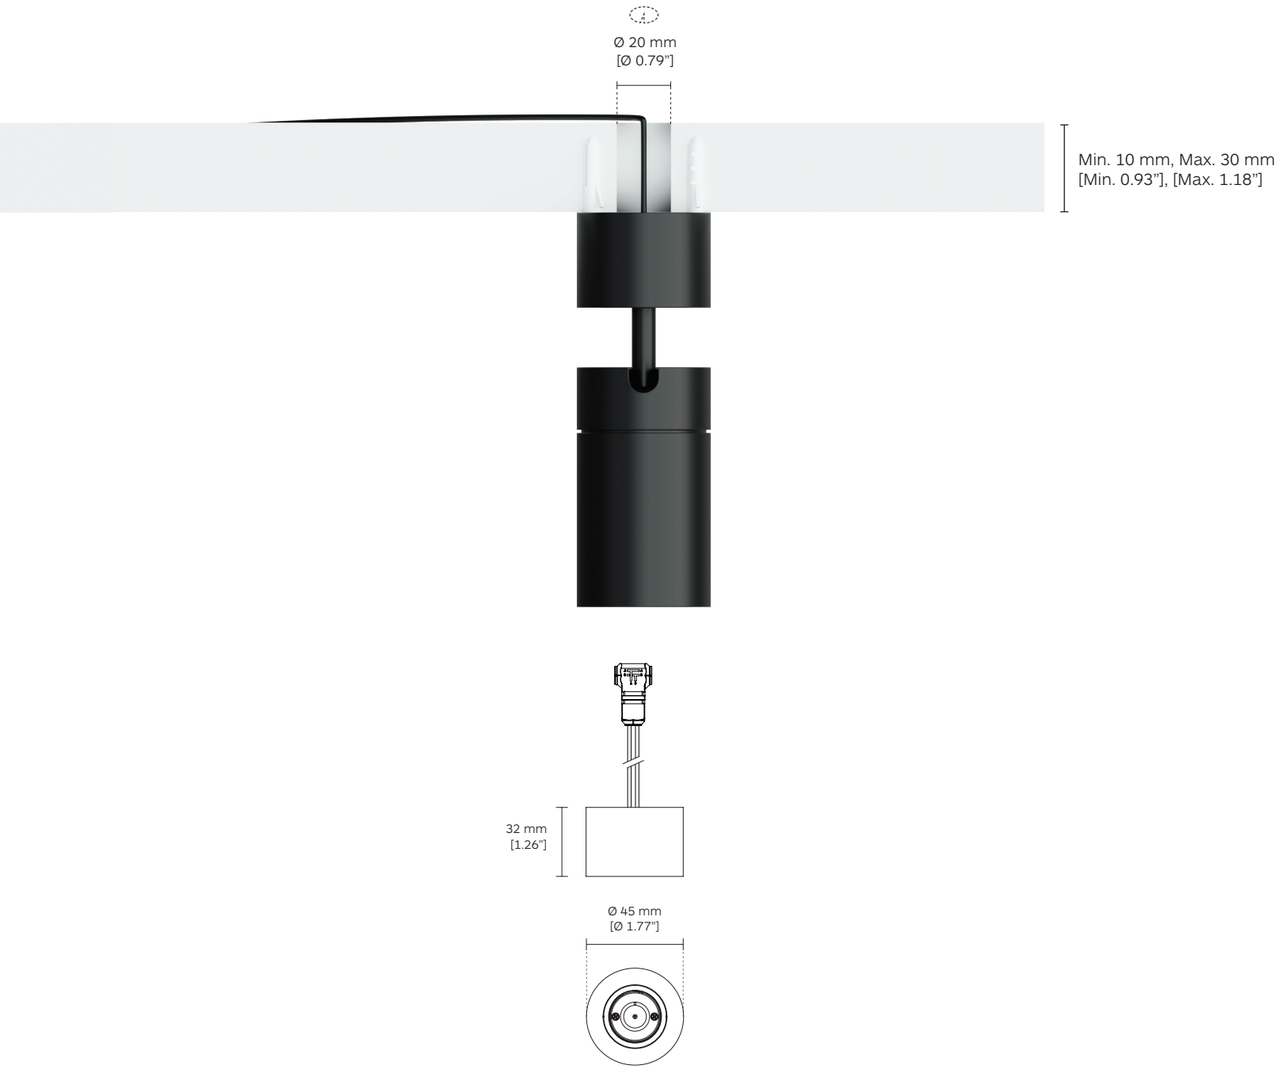


[1] Mounting options are ordered separately.

48V


Softrack surface-mounted *with external wiring*

Art. 2J16 [1] (base mounting option for cable direction type 'L')
Art. 2J20 [1] (base mounting option for cable direction type '45°')

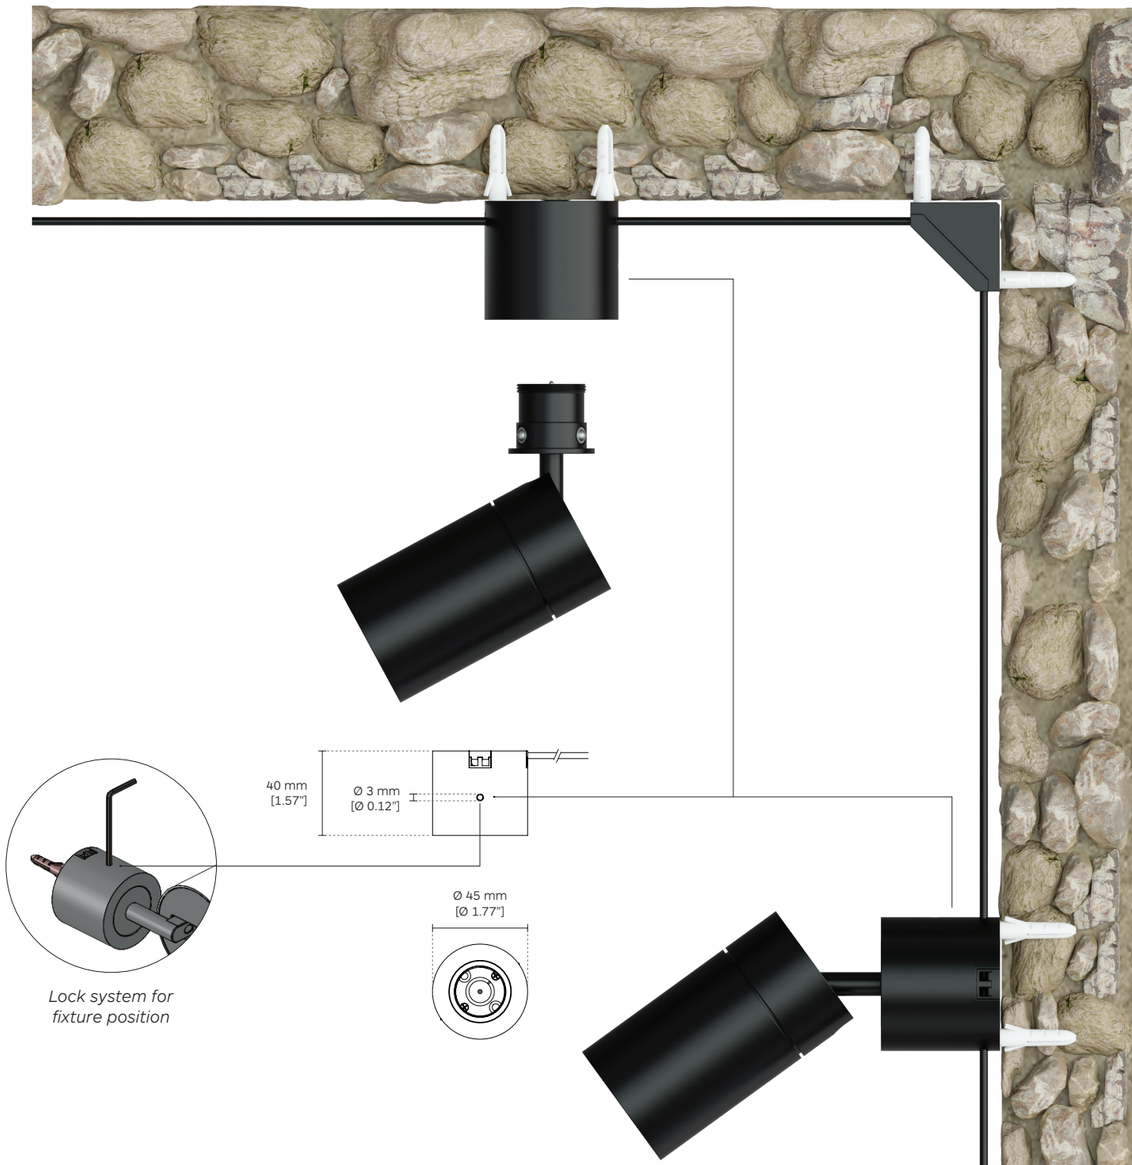

TicTok & Viivo Mono Point

Complete compatibility and effortless tool-free installation

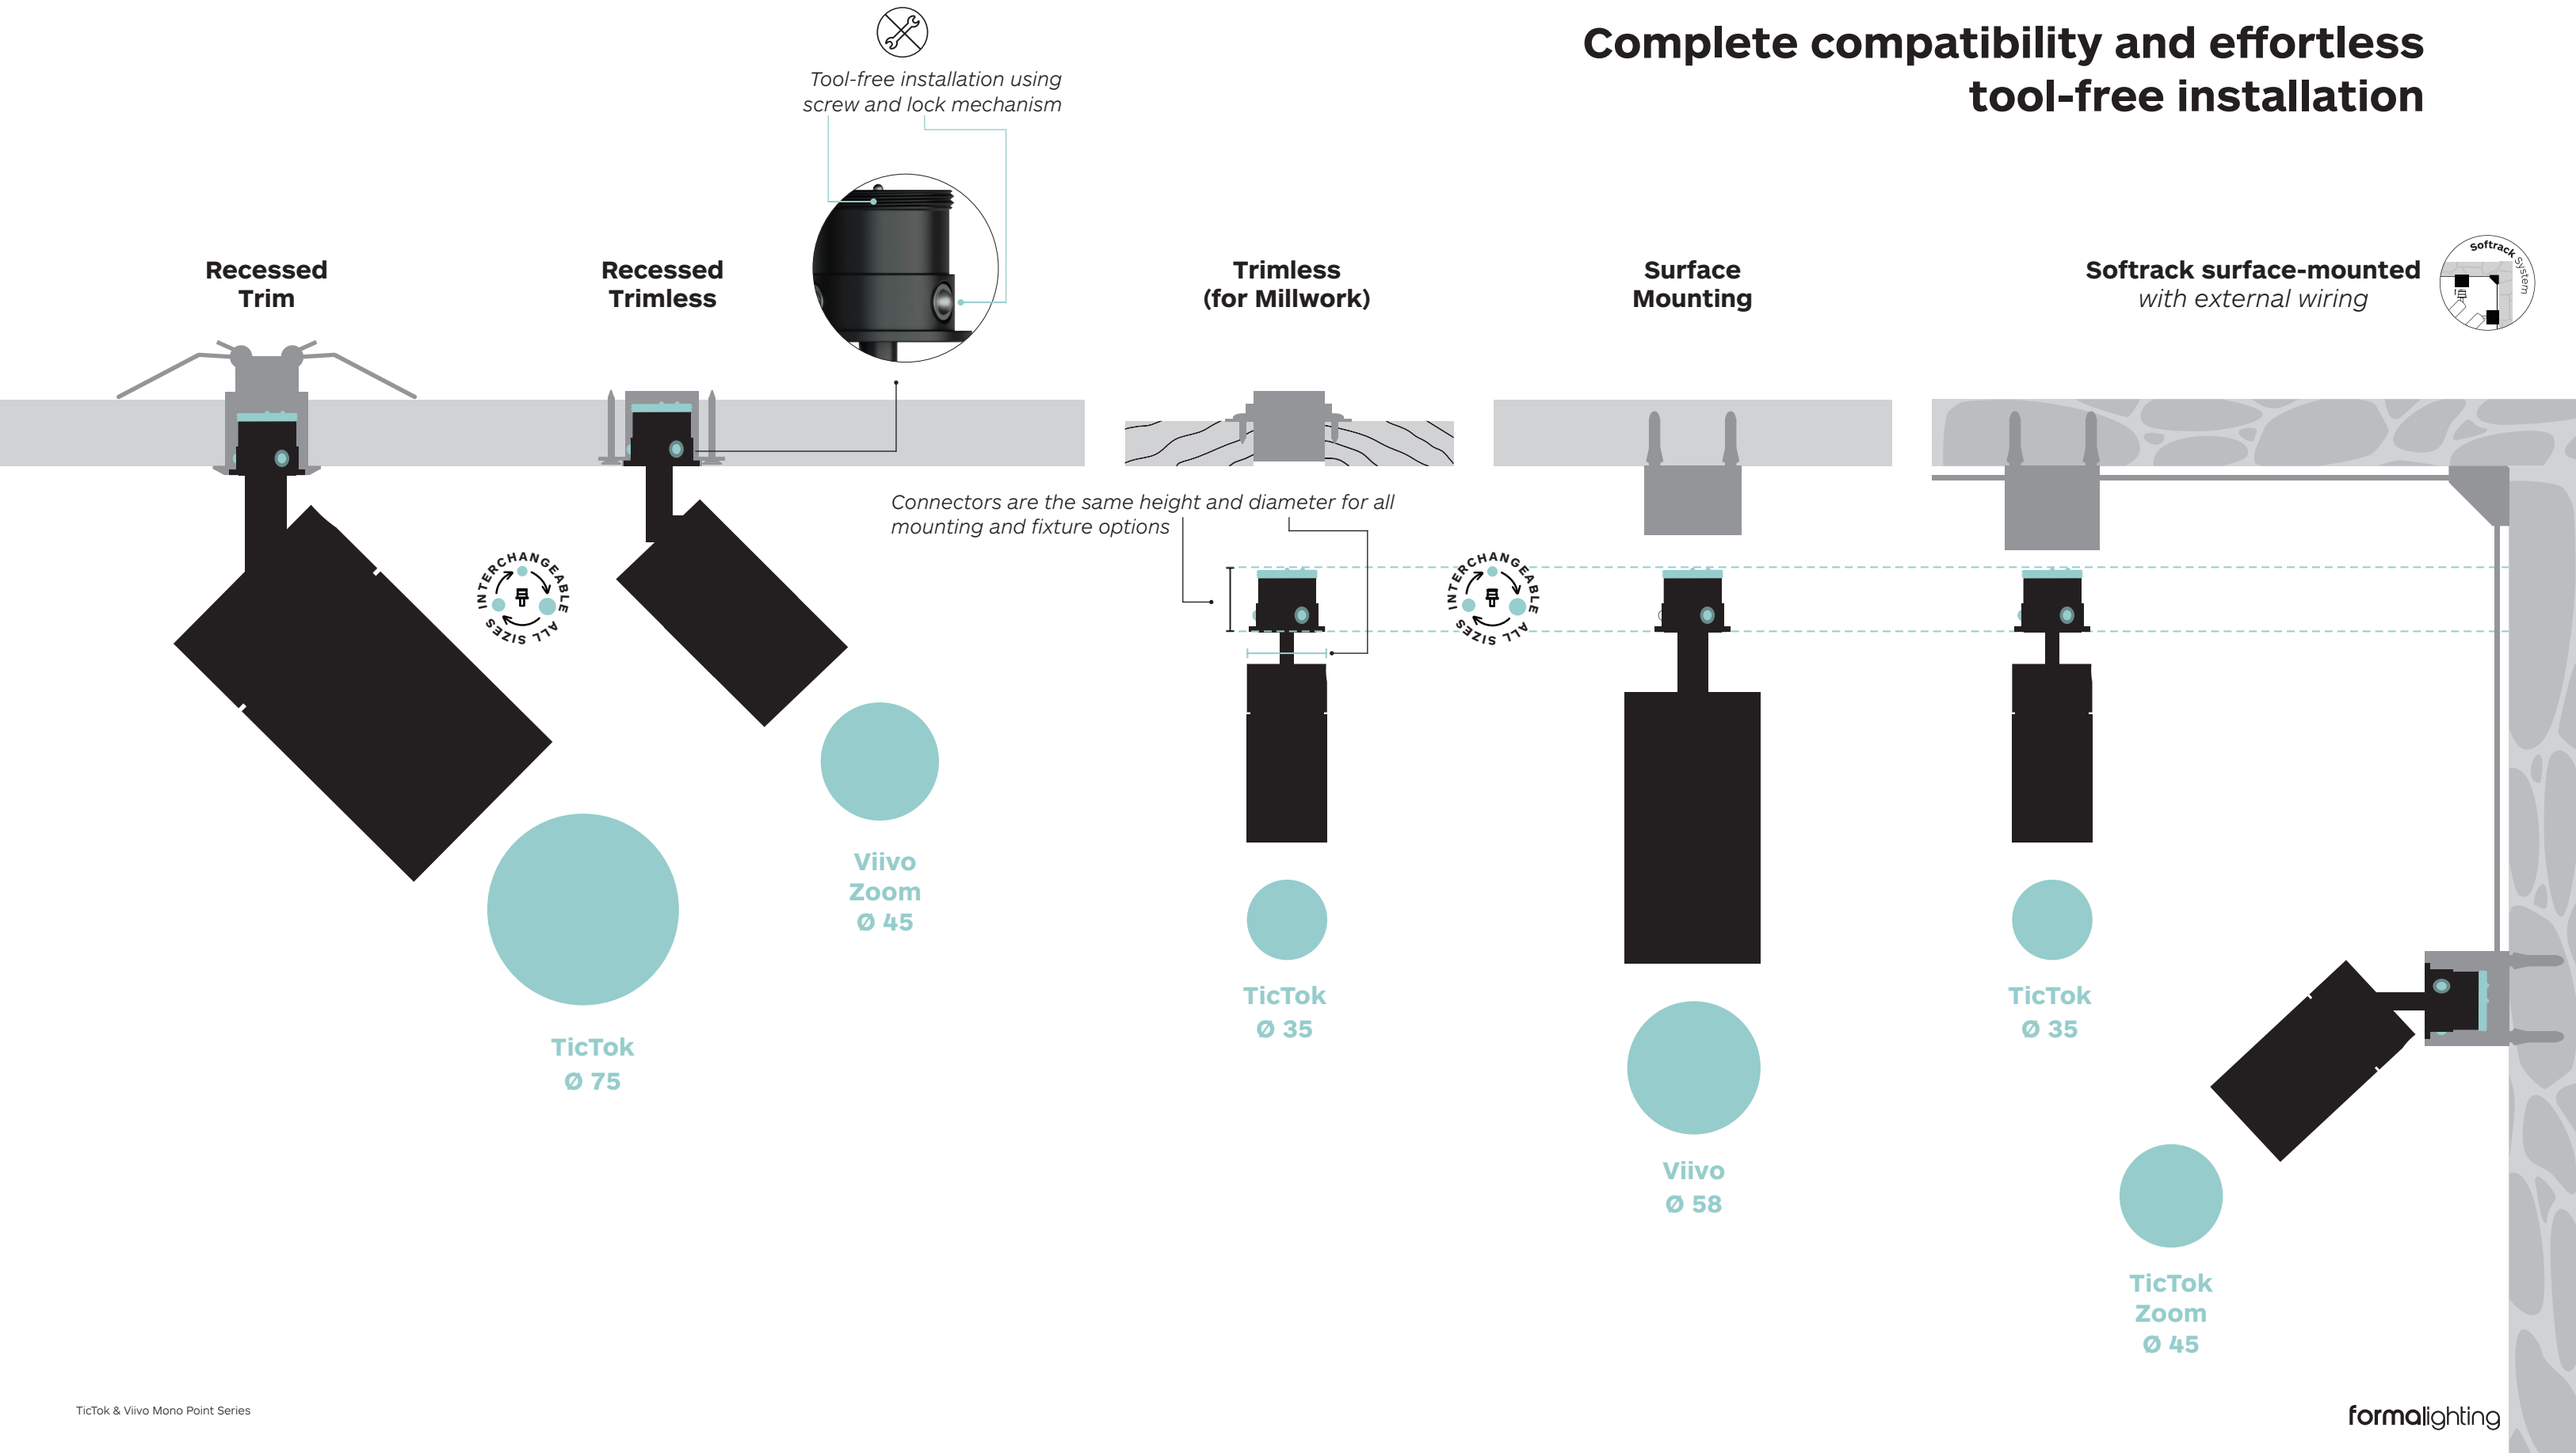

Softrack surface-mounted
with external wiring

The Mono Point Softrack is a revolutionary lighting system featuring interchangeable light heads that are seamlessly integrated into concrete ceilings and walls.


There are no extra clunky power cables or clutter; the Mono Point Softrack System is streamlined and simple. The 45° and L-shape type bases allow multiple design configurations. Mono Point is ideal for any ceiling type and is compatible with a range of Viivo / TicTok spotlights Ø35, Ø45, Ø58 and Ø75 mm.

Softrack surface-mounted *with external wiring*

Art. 2J16 & 2J20

Available finishes for fixtures - 65 54 1Y 1A 27 79 3G 3H 3J

Available colours for cables - Black White Red

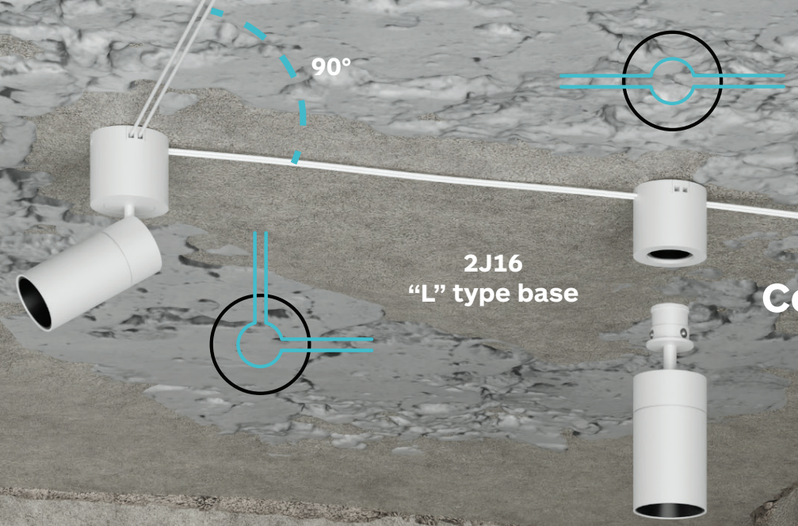


2J16
“L” type base

Corner cable holder

Art. 2J17



Corner cable holder installation





2J20
“45°” type base

This application example is using 4 bases & 1 cable holder:

- **“L” type base x 2**
- **“45°” type base x 2**
- **Corner cable holder x 1**

Code ordering example:

2 J 1 6 + 2 J 2 0 + 2 G 6 6 + 2 J 1 7

1. Base mounting code for “L” type
2. Base mounting code for “45°” type
3. Corner cable holder code
4. Cable code

Mix & Match





Fixture Finish

- Embossed Matt Black
- Embossed Matt White
- Embossed Matt Total White
- Chrome Gold
- Chrome Polished
- Brushed Aluminium
- Brushed Brass
- Antique Brass
- Blackened Brass

Cable Colour

- Red
- White
- Black

A wide range of finishes & multiple wire colors are available for each series on request.

Fixture Finish: **Chrome Polished** + Cable Colour: **Red**

Fixture Finish: **Antique Brass** + Cable Colour: **Black**

TicTok Mono Point

35 | 45 | 58 | 75 | Zoom 45, 58 & 75

The TicTok Mono Point is a revolutionary lighting system featuring interchangeable components that are seamlessly integrated into the ceiling with a minimalist design.

Choose from recessed trim, trimless, and surface mount. Mono Point is ideal for any ceiling type and is compatible with a range of TicTok spotlights Ø35mm, Ø45mm, Ø58mm and Ø75mm. Each light head tilts up to 70° and rotates 360° horizontally.

Mix and match to create your custom arrangement; whether mounted on the wall or ceiling, it adds a dramatic and refined touch to any space.

- **65** - Embossed Matt Black
- **54** - Embossed Matt White
- **1Y** - Embossed Matt Total White
- **27** - Chrome Polished

LED Sources:

High Efficacy:
CRI: 90 | CCT: 2700K, 3000K, 3500K, 4000K.

High Rendering:
CRI: 97 | CCT: 2700K, 3000K, 3500K, 4000K.

Accessories:

- Wide & Dense Texture Honeycomb Louvre
- Elliptical Beam Diffuser
- Coloured Glasses Diffuser
- Opal Diffuser
- Spread Lens
- Cross blade Louvre
- Barn doors
- Wallwasher Cone 45°

Please see page 30 for details.

TicTok Mono Point

35 | 45 | 58 | 75 | Zoom 45, 58 & 75














48V | CE | CSA | IP20 | 360° | 70°

65 | 54 | 1Y | 27


9298









9296 / 9297










Zoom Spot 15° - 47°

9294 / 9295










Zoom Spot 16° - 34°

92B6 / 92B7







Zoom Spot 12° - 28°

		Fixture Code [1]	LED Module Code	LED Power	Nominal Lumen	Beam Angle (BA°)
CRI>90 3000K High Efficacy	TicTok 35	**9298**	**BH23**	5.2W	761 lm	**16°** / **24°** / **34°**
	TicTok 45	**9296**	**E091**	9W	1357 lm	**18°** / **26°** / **38°**
	TicTok **Zoom** 45	**9297**	**E099**	5W	761 lm	**BS** (15°- 47°)
	TicTok 58	**9294**	**E093**	11W	1586 lm	**12°**
			E097	14W	2240 lm	**18°** / **25°** / **35°**
	TicTok **Zoom** 58	**9295**	**E100**	11W	1586 lm	**BS** (16°- 34°)
	TicTok 75	**92B6**	**E098**	18W	2723 lm	**14°** / **26°** / **38°**
	TicTok **Zoom** 75	**92B7**	**E101**	18W	2723 lm	**BS** (15° - 28°)
CRI>97 3000K High Rendering	TicTok 35	**9298**	**E013**	5W	620 lm	**20°** / **24°** / **38°**
	TicTok 45	**9296**	**JC02**	10W	785 lm	**12°**
				9W	975 lm	**18°** / **26°** / **38°**
	TicTok **Zoom** 45	**9297**	**E077**	5.5W	606 lm	**BS** (15°- 47°)
	TicTok 58	**9294**	**E030**	15W	1418 lm	**12°** / **18°**
				14W	1590 lm	**24°** / **34°**
	TicTok **Zoom** 58	**9295**	**E030**	15W	1418 lm	**BS** (17°- 34°)
	TicTok **Zoom** 75	**92B7**	**E035**	19W	1651 lm	**BS** (12° - 28°)

Dimming Options		CCT Options [2]	
D0	No Dim	**27**	2700K
DC	CASAMBI	**30**	3000K
DN [3]	On board Dim	**35**	3500K
DR [4]	Dim by Power Supply Unit	**40**	4000K

BS = Beam Shaping. Ordering code; ***BS****.*

[1] For complete code ordering information, please see page 44. [2] Other CCT options available on request. [3] Dimming option (DN) on board dim is not available for 9298.
[4] DR - Remote dimming is managed through the power supply, with the dimming protocol determined by the input dimming signal. Group dimming only.
48V Power Supply to be ordered separately, please see pages 34-35 for more details.
For the most updated product information, please go to our website.

formalighting

Viivo Mono Point

35 | 45 | 58 | 75 | Zoom 45, 58 & 75

The Viivo Mono Point is a revolutionary lighting system featuring interchangeable components that are seamlessly integrated into the ceiling with a minimalist design.

Choose from recessed trim, trimless, and surface mount. Mono Point is ideal for any ceiling type and is compatible with a range of Viivo spotlights Ø35mm, Ø45mm, Ø58mm and Ø75mm. Each light head tilts up to 90° and rotates 360° horizontally.

Mix and match to create your custom arrangement; whether mounted on the wall or ceiling, it adds a dramatic and refined touch to any space.

LED Sources:

High Efficacy:
CRI: 90 | CCT: 2700K, 3000K, 3500K, 4000K.

High Rendering:
CRI: 97 | CCT: 2700K, 3000K, 3500K, 4000K.

- **65** - Embossed Matt Black
- **54** - Embossed Matt White
- **1Y** - Embossed Matt Total White
- **1A** - Chrome Gold
- **27** - Chrome Polished
- **79** - Brushed Aluminium
- **3G** - Brushed Brass
- **3H** - Antique Brass
- **3J** - Blackened Brass









Accessories:

- Wide & Dense Texture Honeycomb Louvre
- Elliptical Beam Diffuser
- Coloured Glasses Diffuser
- Opal Diffuser
- Spread Lens
- Cross blade Louvre
- Barn doors
- Wallwasher Cone 45°

Please see page 30 for details.



Viivo Mono Point

35 | 45 | 58 | 75 | Zoom 45, 58 & 75














92A3








92A1






92A2









Zoom Spot 15° - 47°

9299 / 92A0






Zoom Spot 16° - 34°

92B8 / 92B9





Zoom Spot 12° - 28°

			Fixture Code [1]	LED Module Code	LED Power	Nominal Lumen	Beam Angle (BA°)
CRI>90 3000K	High Efficacy	Viivo 35	**92A3**	**BH23**	5.2W	761 lm	**16°** / **24°** / **34°**
		Viivo 45	**92A1**	**E091**	9W	1357 lm	**18°** / **26°** / **38°**
		Viivo **Zoom** 45	**92A2**	**E099**	5W	761 lm	**BS** (15°- 47°)
		Viivo 58	**9299**	**E093**	11W	1586 lm	**12°**
				E097	14W	2240 lm	**18°** / **25°** / **35°**
		Viivo **Zoom** 58	**92A0**	**E100**	11W	1586 lm	**BS** (16°- 34°)
		Viivo 75	**92B8**	**E098**	18W	2723 lm	**14°** / **26°** / **38°**
		Viivo **Zoom** 75	**92B9**	**E101**	18W	2723 lm	**BS** (15° - 28°)
CRI>97 3000K	High Rendering	Viivo 35	**92A3**	**E013**	5W	620 lm	**20°** / **24°** / **38°**
		Viivo 45	**92A1**	**JC02**	10W	785 lm	**12°**
					9W	975 lm	**18°** / **26°** / **38°**
		Viivo **Zoom** 45	**92A2**	**E077**	5.5W	606 lm	**BS** (15°- 47°)
		Viivo 58	**9299**	**E030**	15W	1418 lm	**12°** / **18°**
					14W	1590 lm	**24°** / **34°**
		Viivo **Zoom** 58	**92A0**	**E030**	15W	1418 lm	**BS** (17°- 34°)
		Viivo **Zoom** 75	**92B9**	**E035**	19W	1651 lm	**BS** (12° - 28°)

Dimming Options		CCT Options [2]	
D0	No Dim	**27**	2700K
DC	CASAMBI	**30**	3000K
DN [3]	On board Dim	**35**	3500K
DR [4]	Dim by Power Supply Unit	**40**	4000K

BS = Beam Shaping. Ordering code; ***BS****.*

[1] For complete code ordering information, please see page 44. [2] Other CCT options available on request. [3] Dimming option (DN) on board dim is not available for 92A3.
[4] DR - Remote dimming is managed through the power supply, with the dimming protocol determined by the input dimming signal. Group dimming only.
48V Power Supply to be ordered separately, please see pages 34-35 for more details.
For the most updated product information, please go to our website.

formalighting

Accessories

Product / Accessories	 Coloured Glasses Diffuser Colours 25, 42, 55, 85	Opal Diffuser	 Spread Lens Colour 41	 Elliptical Beam Diffuser	 Wide Texture Honeycomb Louvre Colour 10	 Dense Texture Honeycomb Louvre Colour 10	 Cross blade Louvre Colours 10, 17
TicTok 35 & Viivo 35	**2G58**	**2G60**	**/**	**2G62**	**2G31**	**2G33**	**/**
TicTok 45 [1] & Viivo 45 [1]	**2F91**	**2F94**	**2F97**	**2F88**	**2F71**	**2F85**	**2G01**
TicTok 58 [1] & Viivo 58 [1]	**2F92**	**2F95**	**2F98**	**2F89**	**2F83**	**2F86**	**2G02**
TicTok 75 [1] & Viivo 75 [1]	**2F93**	**2F96**	**2F99**	**2F90**	**2F84**	**2F87**	**2G03**

Product / Accessories	 Barn Doors Colours 10, 11	 Wallwasher Cone 45° Colours 10, 17	 Hole Saw *For Mono Point Recessed mountings only*	 Corner cable holder *For Softrack Surface mounted with external wires only*	 Decorative Metal cover Colours 65, 54, 1A, 27, 79, 3G, 3H, 3J
TicTok 35 & Viivo 35	**/**	**/**			
TicTok 45 [1] & Viivo 45 [1]	**2G04**	**2G07**			
TicTok 58 [1] & Viivo 58 [1]	**2G05**	**2G08**	**2H95**	**2J17**	**2J18**
TicTok 75 [1] & Viivo 75 [1]	**2G06**	**2G09**			


Notes:

[1] *No optical accessories are available for TicTok & Viivo 45, 58 & 75 Zoom series.*

Driver Options & Wiring Diagram

Driver Options


No Dim (D0) / On board Dim (DN)*

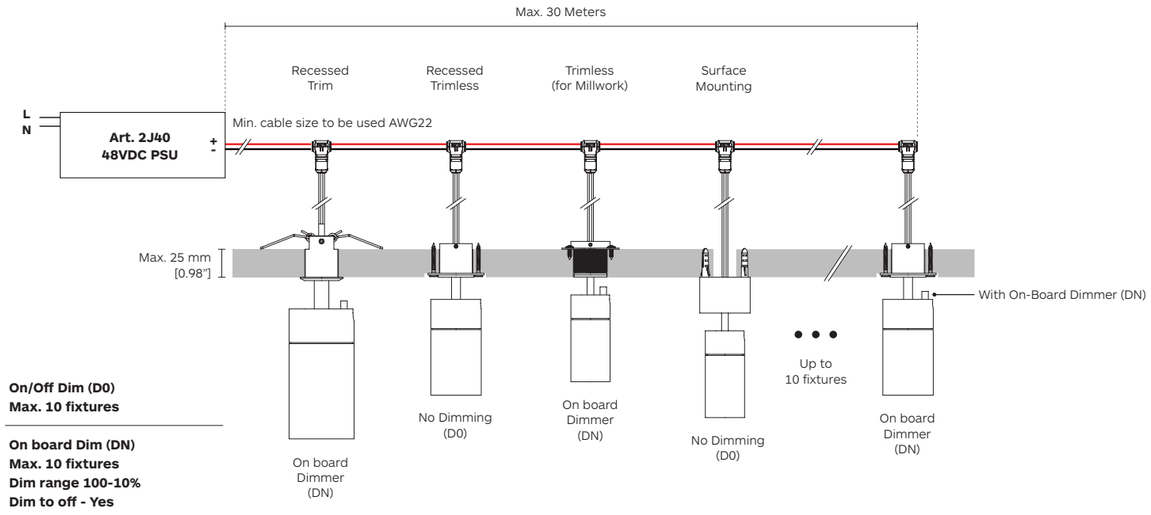

On/Off Dim (D0)
Max. 10 fixtures

On board Dim (DN)
Max. 10 fixtures
Dim range 100-10%
Dim to off - Yes
Individual fixture control - Yes

CASAMBI Dim (DC)*

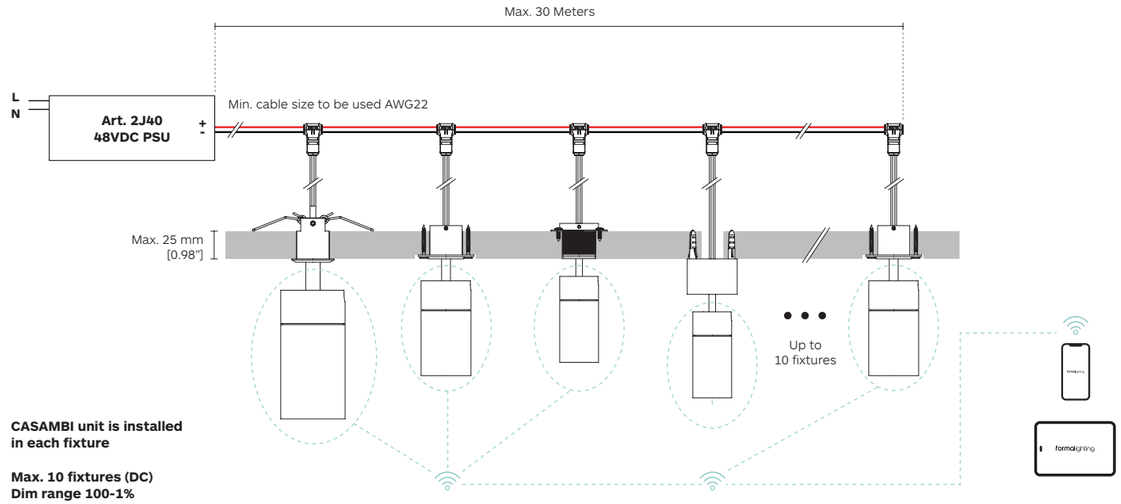


CASAMBI unit is installed in each fixture

Max. 10 fixtures (DC)
Dim range 100-1%
Dim to off - Yes
Individual fixture control - Yes


* Please refer to the wiring diagram and requirements above, which apply to the installation of Mono Point and Softrack.

DALI Dim (DR) by Power Supply Unit (PSU)*

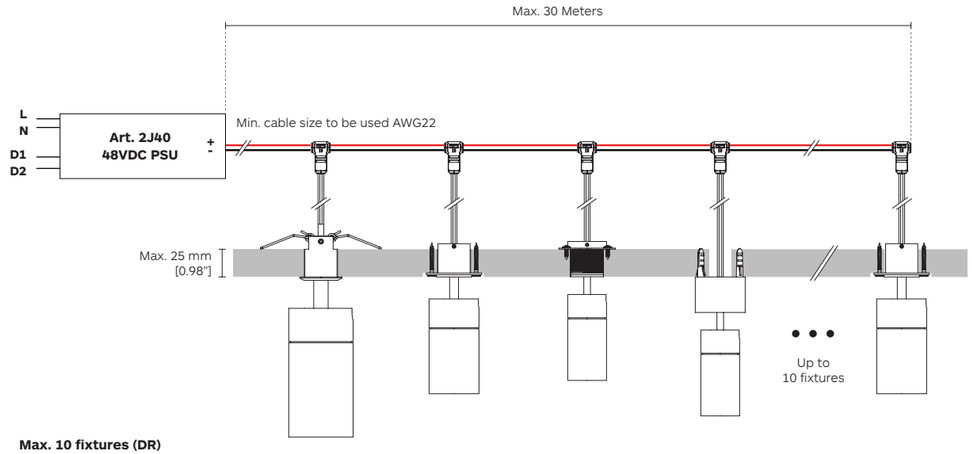

Max. 10 fixtures (DR)
Dim range 100-1%
Individual fixture control - No

0-10V Dim (DR) by Power Supply Unit (PSU)*

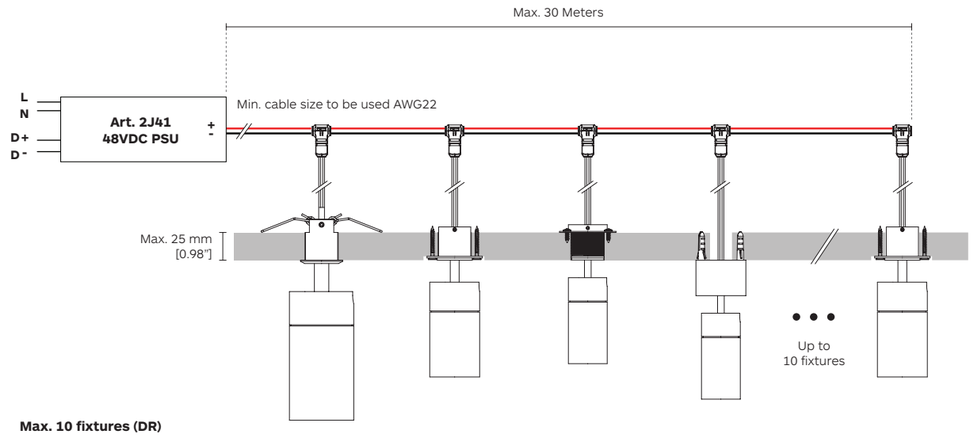


Max. 10 fixtures (DR)
Dim range 100-10%
Dim to off - Yes
Individual fixture control - No


formalighting

Power Supply










	48VDC 320W Dimmable *Available for on/off, DALI, on-board or CASAMBI dimmable fixtures*	48VDC 320W Dimmable *Available for 0-10V dimmable fixtures only*
Code	**2J40**	**2J41**
Size	63 x 280 x 33 mm [2.48" x 11.02" x 1.30"]	68 x 367 x 41 mm [2.68" x 14.45" x 1.61"]

48V Power Supply to be ordered separately.

Installation Guideline for Softrack surface-mounted *with external wiring*

Connection to power supply 48VDC (2J40 / 2J41), 320W Max.

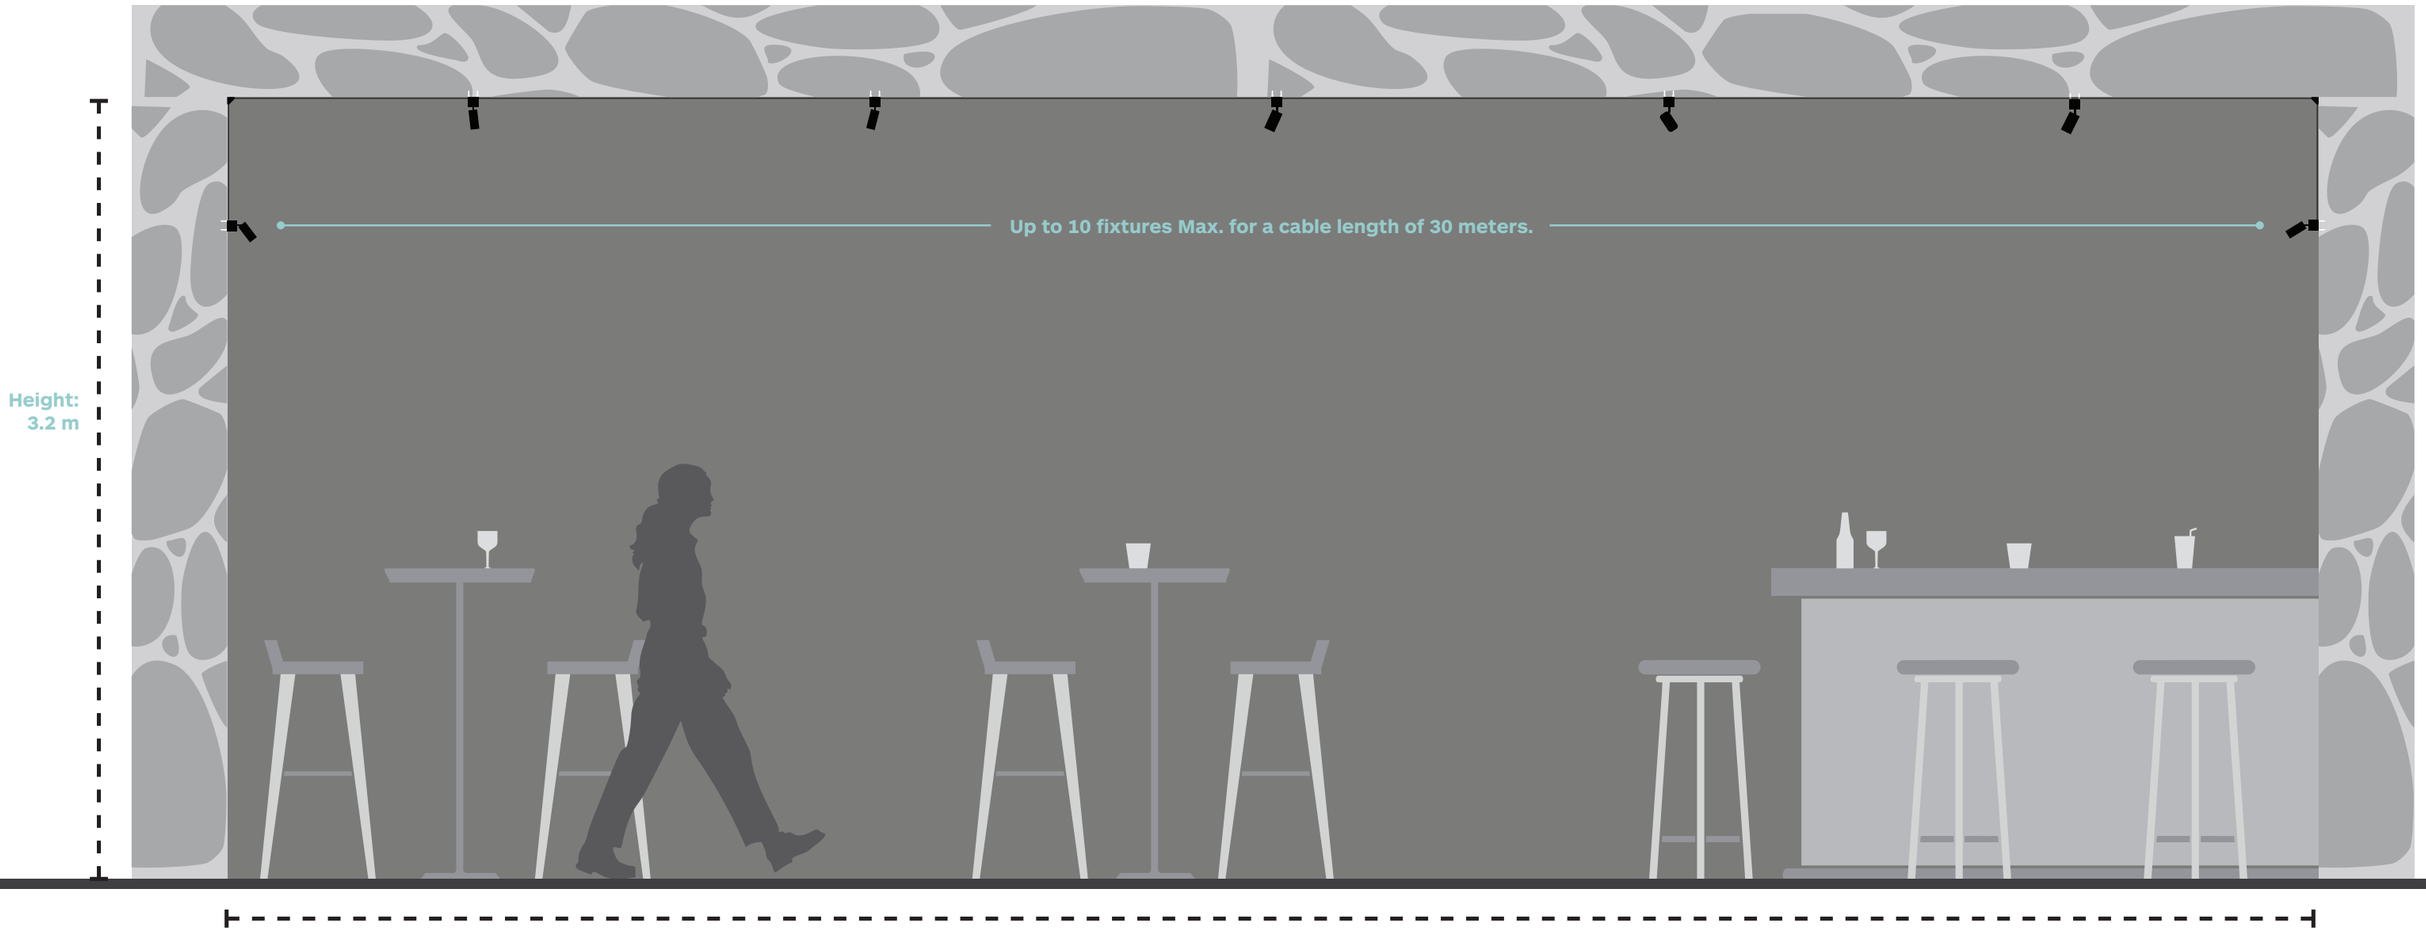

LED Modules & Lens compatibility

LED Modules & Lens compatibility

TicTok x Viivo Mono Point

Product compatibility	LED Module	CRI	LED Power	LENS Compatibility Code					
				16°	**24°**	**34°**	**36°**		
TicTok & Viivo 35 Mono Point Code: 9298 I 92A3	**E013**	CRI› 90	5.2W	L049	L050	L051	/		
		CRI› 97	5W	L049	L050	/	L051		
				12°	**18°**	**26°**	**36°**	**38°**	
TicTok & Viivo 45 Mono Point Code: 9296 I 92A1	**E091**	CRI› 90	9W	/	L043	L044	L045	/	
	JC02	CRI› 97	10W	L043	/	/	/	/	
		CRI› 97	9W	/	L043	L044	/	L045	
				12°	**18°**	**24°**	**25°**	**34°**	**35°**
TicTok & Viivo 58 Mono Point Code: 9294 I 9299	**E093**	CRI› 90	11W	L004	/	/	/	/	/
	E097	CRI› 90	14W	/	L004	/	L005	/	L006
	JC01	CRI› 97	14W	/	/	L041	/	L042	/
	JC01	CRI› 97	15W	L040	L041	/	/	/	/
				14°	**26°**	**38°**			
TicTok & Viivo 75 Mono Point Code: 92B6 I 96B8	**E098**	CRI› 90	18W	L008	L009	L010			

Symbols & Icons

Code system
Global presence

Symbols & Icons

48V input Class III

CLASS II
Luminaires of insulation Class II - With safety isolation, this means the tension conductions element are protected by additional isolation.

The isolation of an earth wire it is not necessary and the connection to it is not allowed.

Zoom

CASAMBI

OnBoard Dim

Degree of Ingress Protection

Interchangeable All sizes

Softrack System

Certification Icons

European Economic Area
Declares that the product complies with all applicable European Union safety, health, and environmental protection requirements.

Canada US
Indicates that the product has been tested and meets Canadian and North American standards requirements standards for safety and performance.

Korea
Ensures the product complies with South Korean safety, health, and environmental standards for electronic equipment.

China
A mandatory safety mark required for many products sold or used in the Chinese market.

Body Colour [1]




1Y Embossed matt total white (RAL 9016)




54 Embossed matt white (RAL 9016)




65 Embossed matt black (RAL 9017)




27 Chrome Polished




1A Chrome Gold




79 Brushed Alumnium



3G Brushed Brass



3H Antique Brass



3J Blackened Brass

Cable Colour for Softrack Surface Mounted [2]



10 Black



11 White



55 Red

Notes:

*A wide range of **finishes[1]** & **multiple wire colors[2]** are available for each series on request.*

Code system


Code ordering example: **9 2 9 6 J C 0 2 - 9 7 3 0 2 6 D 0 6 5** + **2 H 8 6 - 2 G 0 4**

(1) (2) (3) (4) (5) (6) (7) (8) (9)

- (9) Optical accessories
- (8) Mounting options
- (7) Body colour
- (6) Dimming options
- (5) Beam angle
- (4) CCT-LED colour temperature
- (3) LED CRI
- (2) LED Module code
- (1) Product code

LED CRI	CCT-LED Colour temperature	Dimming Options	Body Colour	Mounting options	Ø 35	Ø 45	Ø 58	Ø 75	Accessories
90 CRI > 90	**27** Warm White 2700K	**D0** No Dim	**1Y** Embossed matt total white RAL (9016)	**2H87** Surface Mounting	**2G33**	**2F85**	**2F86**	**2F87**	Dense Texture Honeycomb Louvre
97 CRI > 97	**35** Warm White 3500K	**DC** CASAMBI	**54** Embossed matt white RAL (9016)	**2H93** Recessed Trim	/	**2G01**	**2G02**	**2G03**	Cross blade Louvre
		DN On board Dim	**65** Embossed matt black RAL (9017)	**2H92** Recessed Trimless	/	**2G04**	**2G05**	**2G06**	Barn Doors
		DR Dim by Power Supply Unit (PSU)	**27** Chrome Polished	**2H86** Trimless (for Millwork)	/	**2G07**	**2G08**	**2G09**	Wallwasher Cone 45°
			1A Black RAL (9004)	**2J16** Softrack Surface for L Type Base	**2G58**	**2F91**	**2F92**	**2F93**	Coloured Glasses Diffuser
			79 Brushed Alumnium	**2J20** Softrack Surface for 45° Type Base	**2G60**	**2F94**	**2F95**	**2F96**	Opal Diffuser
			3G Brushed Brass		/	**2F97**	**2F98**	**2F99**	Spread Lens
			3H Antique Brass		**2G62**	**2F88**	**2F89**	**2F90**	Elliptical Beam Diffuser
			3J Blackened Brass		**2G31**	**2F71**	**2F83**	**2F84**	Wide Texture Honeycomb Louvre
						2H95			Hole Saw
						2J17			Corner cable holder
						2J18			Decorative Metal Cover
						2G66			Cable Code

How to order

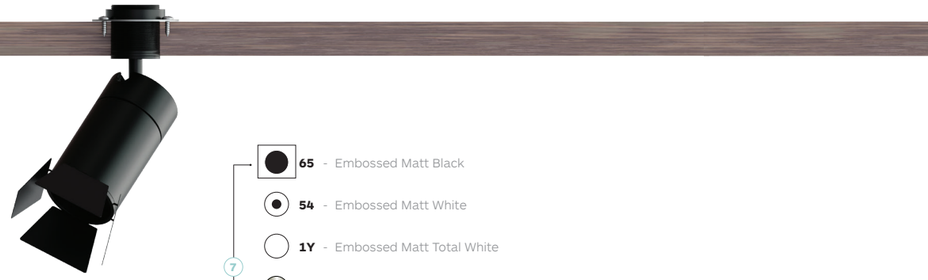

(7)
- **65** - Embossed Matt Black
- **54** - Embossed Matt White
- **1Y** - Embossed Matt Total White
- **27** - Chrome Polished

	Fixture Code	LED Module Code	LED Power	Nominal Lumen	Beam Angle (BA°)	Dimming Options	CCT Options	Mounting Options
CRI>97 3000K High Rendering (4) (3)	TicTok 45 **9296** (1)	**JC02** (2)	9W	975 lm	**18°/ 26°/ 38°** (5)	**D0** No Dim (6)	**27** 2700K	**2H87** Surface Mounting
						DC CASAMBI	**30** 3000K (4)	**2H93** Recessed Trim
						DN On board Dim	**35** 3500K	**2H92** Recessed Trimless
						DR Dim by Power Supply Unit (PSU)	**40** 4000K	**2H86** Trimless (for Millwork) (8)
								2J16 Softrack Surface for L Type Base
								2J20 Softrack Surface for 45° Type Base

Optical Accessories

2G04 Barn Doors (9)

(1) Product code	**9296**
(2) LED Module code	**JC02**
(3) LED CRI	**97**
(4) CCT-LED colour temperature	**30**
(5) Beam angle	**26**
(6) Dimming Options	**D0**
(7) Body colour	**65**
(8) Mounting Options	**2H86**
(9) Optical Accessories	**2G04**

formalighting

Global presence

Celebrating over 50 years of vision, dedication and innovation, formalighting's versatile and high-quality product offerings extends internationally via our headquarters in Hong Kong, London, Milan and Shanghai.
Our well chosen and selected partners as well as our affiliated international offices broaden our global presence further in markets such as USA, Australia, Japan, South East Asia, India and the Middle East.

Through our commitment to growth and investment within formalighting's professional team, infrastructure and product ranges, we are able to provide increasing service to our global retail and hospitality clients as well as lighting designers and specifiers strengthening our position as a leading international supplier of innovative architectural lighting solutions and systems.

With over 50 years' experience in designing and manufacturing architectural lighting, formalighting's comprehensive portfolio offers a competitive range of European designed and expertly engineered products that carry CB, CE, CCC and UL certifications.

Furthermore formalighting's latest award-winning motorized range of track, pendant, and recessed fixtures, featuring remote-controlled adjustable pan and tilt, dim, dim to warm, tuneable white and beam shaping lens, are available worldwide incorporating the latest, most advanced lighting technologies.

MILAN
EUROPE HEADQUARTERS

Tel (+39) 02 9354 0300
Fax (+39) 02 9343 5117
E- mail info-europe@formalighting.com

HONG KONG
ASIA HEADQUARTERS

Tel (+ 852) 2516 6500
Fax (+ 852) 2516 6525
E- mail info-asia@formalighting.com

NEW YORK
LOCAL SALES OFFICE

E- mail info-us@formalighting.com

SHANGHAI
LOCAL SALES OFFICE

E- mail info-china@formalighting.com

LONDON
LOCAL SALES OFFICE

E- mail info-uk@formalighting.com

AUSTRALIA
LOCAL SALES OFFICE

Tel (+61) 488 567 388
E- mail info-australia@formalighting.com

INDIA
LOCAL SALES OFFICE

Tel (+91) 9686351257
E- mail info-india@formalighting.com

formalighting is constantly developing and improving its products therefore all information, drawings illustrations, specifications, photometric values in this catalogue are indicatives and shall not form part of any commitment by our company that reserves the right to change specifications without prior notification or public announcement.
Technical information on the installation-instruction has precedence over the information in the catalogue.
Our general terms and conditions shall apply notwithstanding any stipulation on the contrary to all the orders and agreement with formalighting. You can obtain a copy of these conditions on demand.

Publication date: November 2026
©Copyright formalighting

With thanks to all contributors for the realization of this catalogue

Designed by formalighting's Graphic Design Department

No part of this catalogue may be copied without written authorization of formalighting

formalighting

MILAN

-

LONDON

-

USA

-

HONG KONG

-

SHANGHAI

-

INDIA