formalighting

ArchiTrack System

2026

ArchiTrack System

Page 4 - 19 *The System*

Page 20 - 21 *Mounting Options*

Page 22 - 24 *Installation Components*

Page 25 - 39 *Fixtures Compatibility*

ArchiTrack System






Precision & consistency

Exactness and reliability


Modular design

Uniform alignment

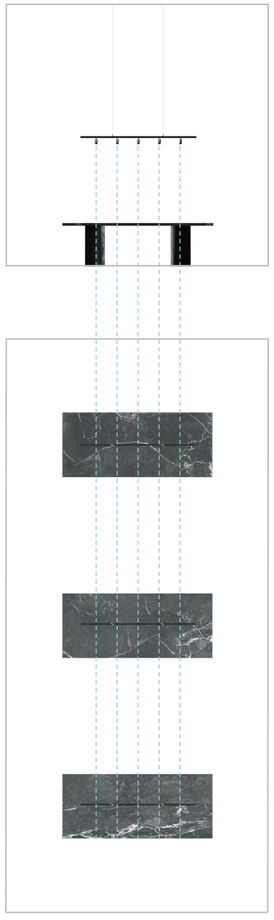

Front view

Top view

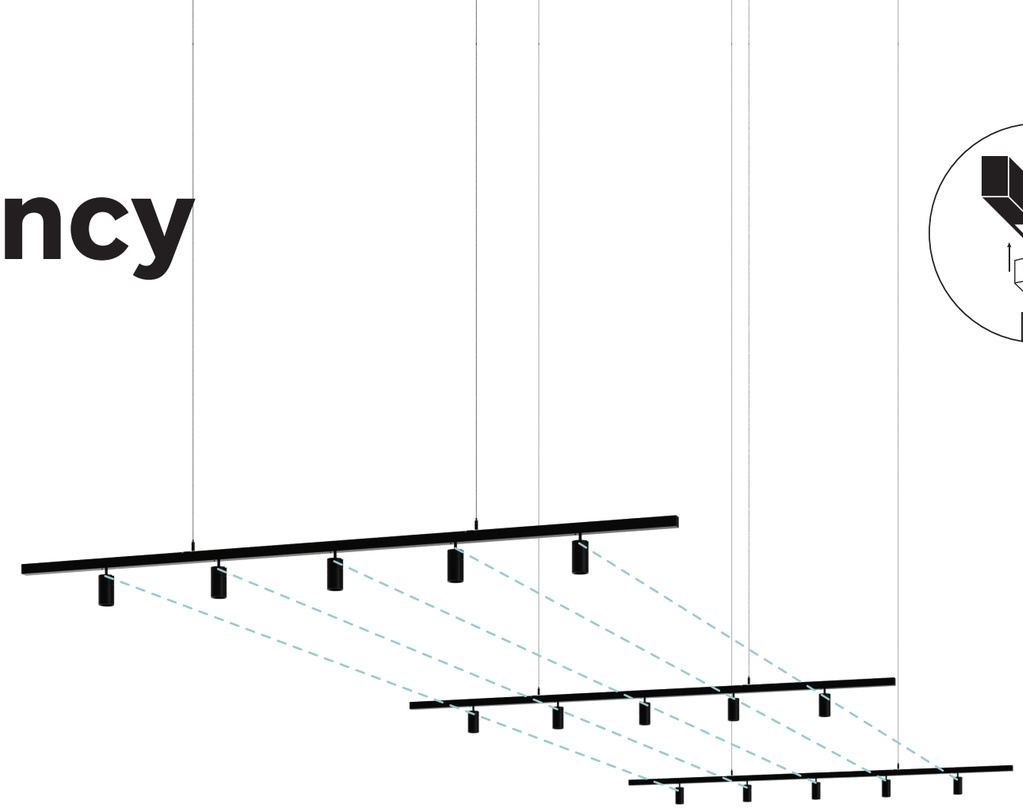



Flexible & Adaptable



Tool-free installation
with safety lock


ArchiTrack redefines the low-voltage track system with a compact, refined design that eliminates the aesthetic compromises typically associated with conventional track solutions.



Engineered to operate at 48V, the system features a slim 26 mm profile and a proprietary plug-and-play socket that eliminates visible grooves—a distinction from conventional track systems. This design is particularly well suited for applications where minimal system dimensions are required, whether for aesthetic or technical considerations.


ArchiTrack VS. Standard Low Voltage Track

ArchiTrack

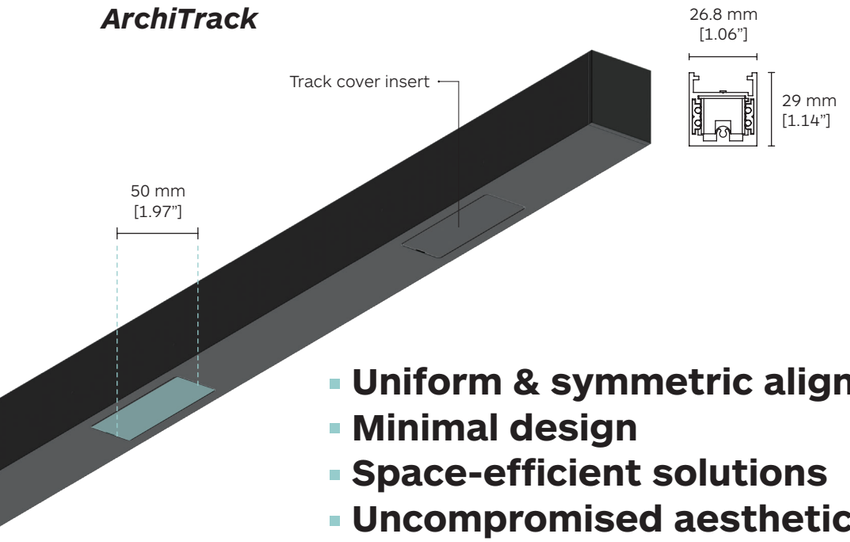


- **Uniform & symmetric alignment**
- **Minimal design**
- **Space-efficient solutions**
- **Uncompromised aesthetics**

Standard Low Voltage Track

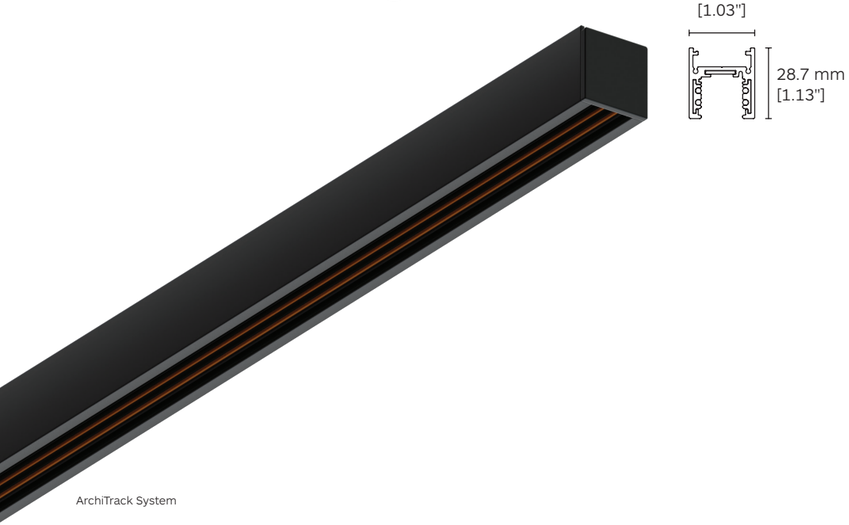

ArchiTrack System

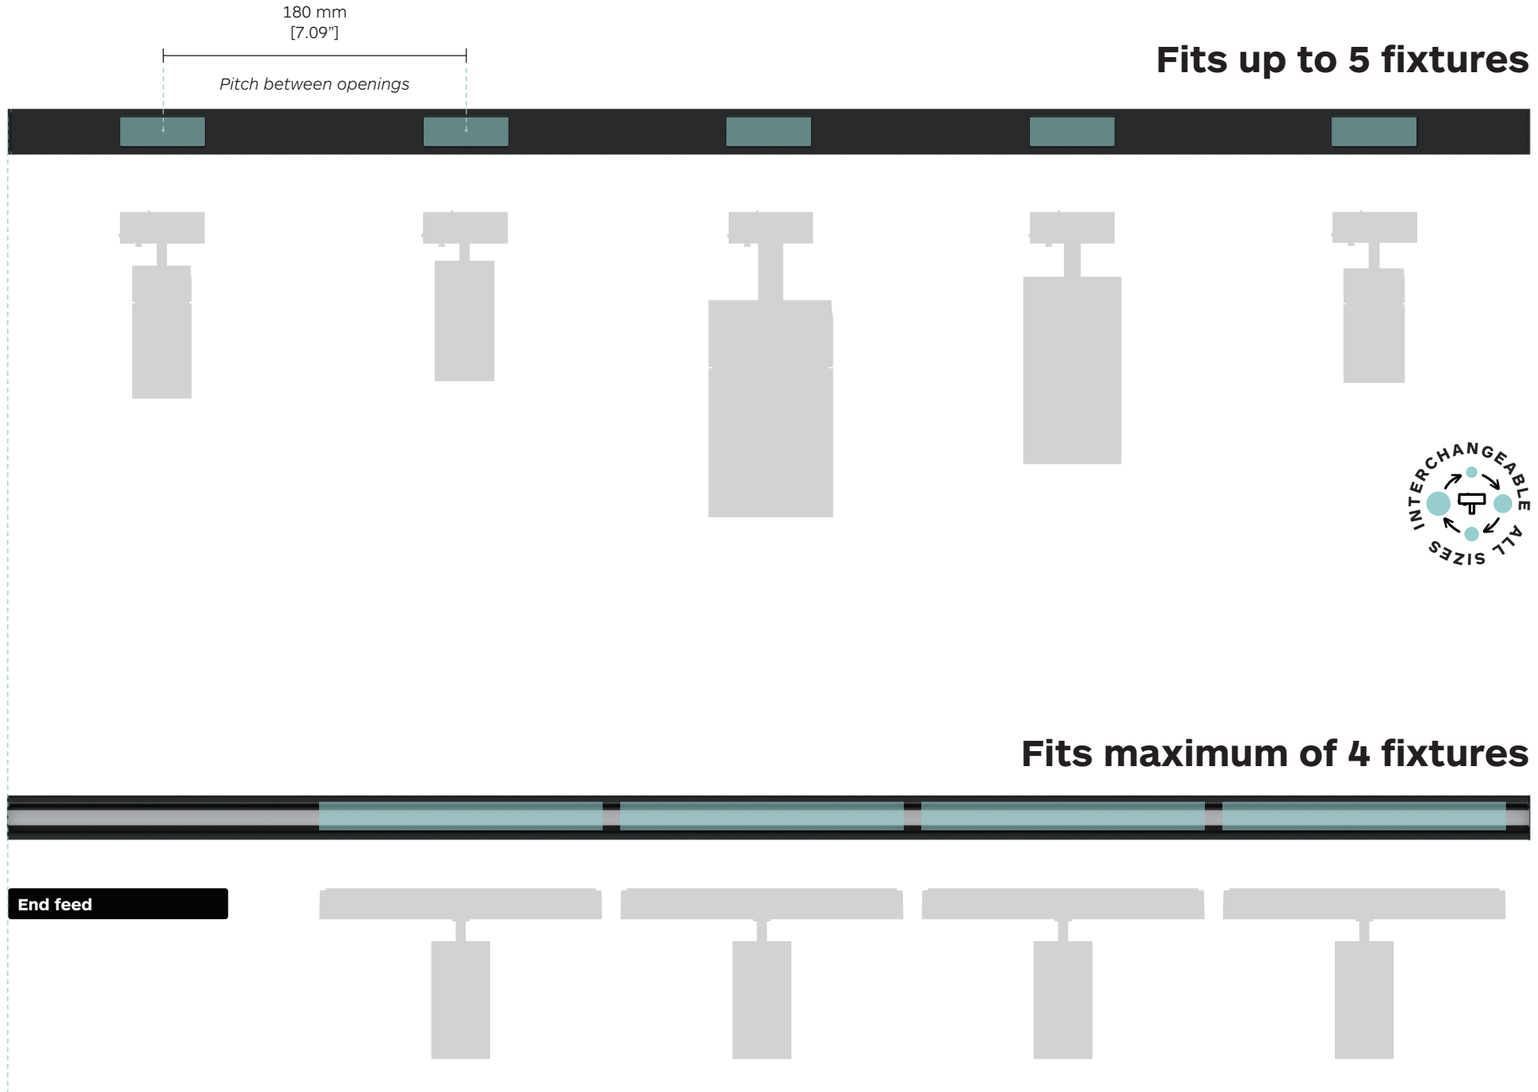


Same length track: 900 mm [35.43"]

Length & Configuration

92A9 ArchiTrack System

Customization options are extensive, supported by a comprehensive range of connectors, couplers, and power feeds, while compatibility with different dimming control options provides enhanced flexibility for system integration.

Length Code	Length (L)
0900	*900 mm [35.43"]*
1980	*1980 mm [77.95"]*
2880	*2880 mm [113.39"]*

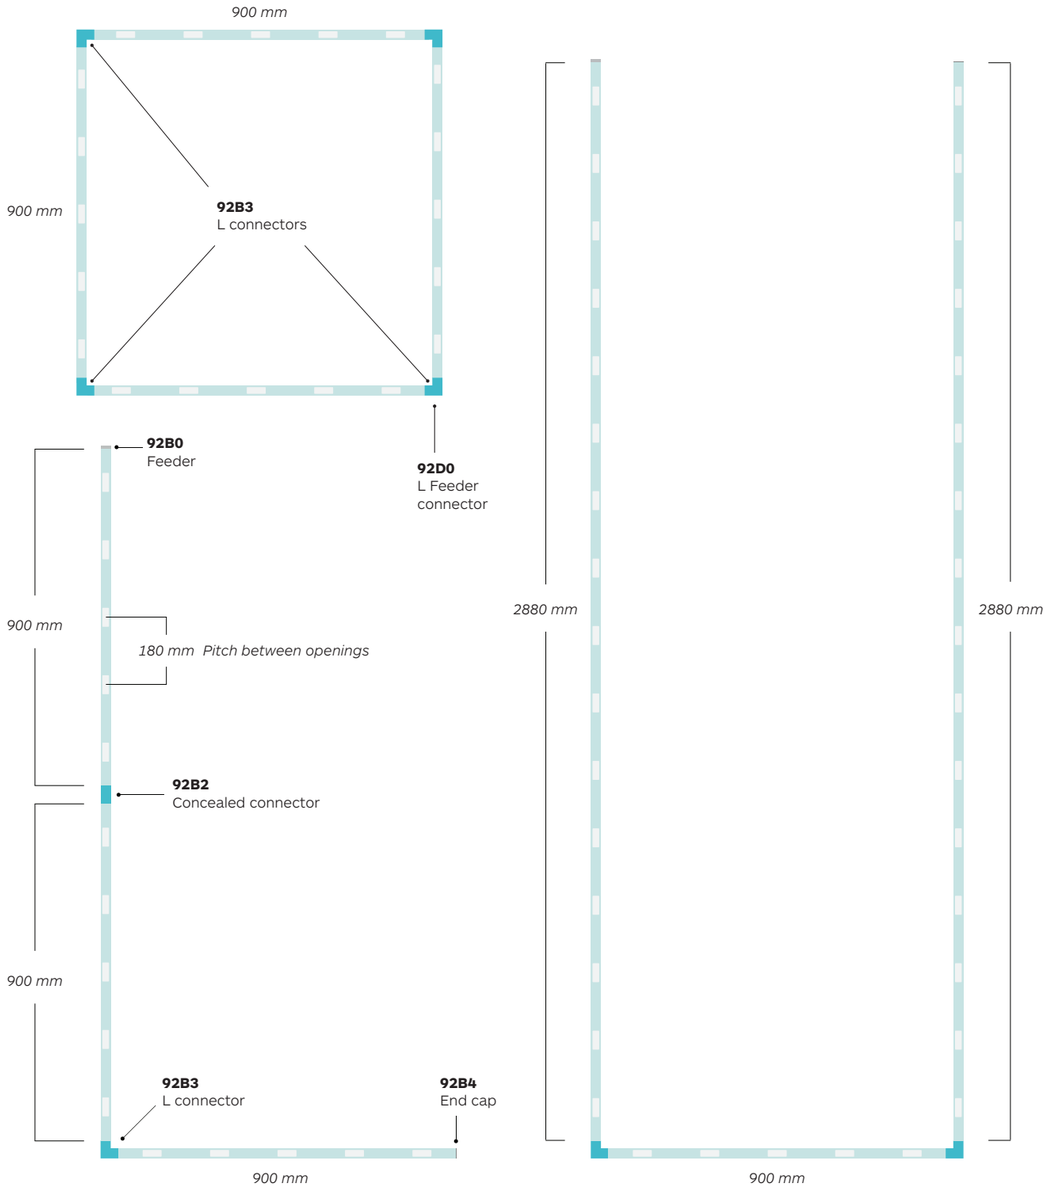


L: 900 mm [35.43"]

5 openings for fixtures location

L: 1980 mm [77.95"]


11 openings for fixtures location

L: 2880 mm [113.39"]

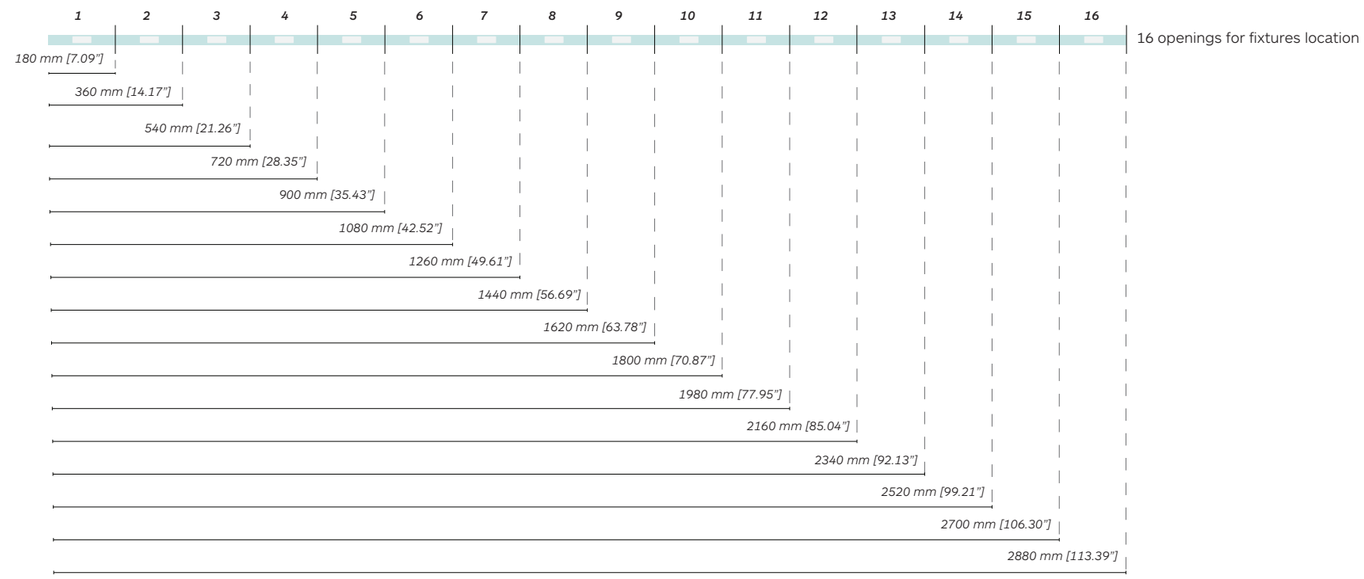

Field Cutting

ArchiTrack supports field cutting, but the track **must only be cut at the designated cutting position.**

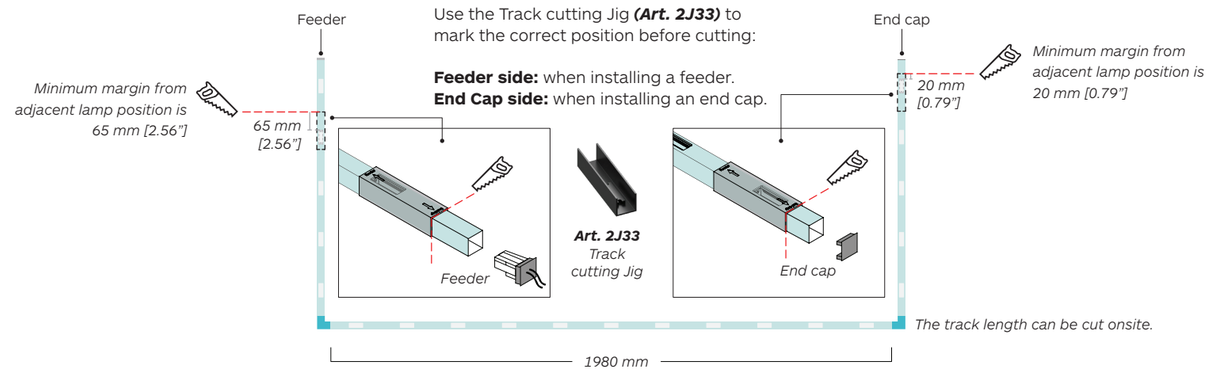

ArchiTrack System

Maximum flexibility. Minimal visual impact.

ArchiTrack integrates effortlessly into shop window, premium retail and high-end residential spaces.
A refined lighting system where architecture, flexibility and aesthetics come together.

- **65** - Embossed Matt Black
- **54** - Embossed Matt White
- **1A** - Chrome Gold
- **27** - Chrome Polished
- **79** - Brushed Aluminium
- **3G** - Brushed Brass
- **3H** - Antique Brass
- **3J** - Blackened Brass

Surface mounting

Pendant mounting

Indirect Uplight (optional)


Art. 4611
ArchiTrack Indirect Uplight

Art. 92B5
Track cover insert

formalighting

ArchiTrack Surface Mounting

ArchiTrack Indirect Uplight

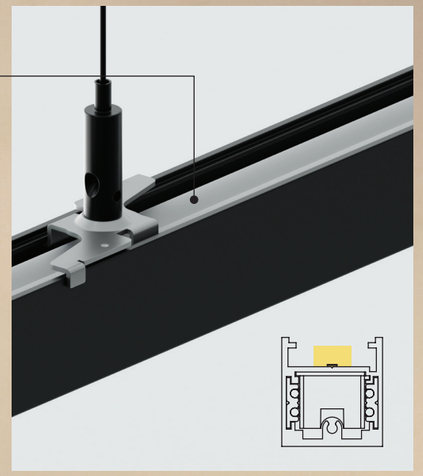

Art. 4611
Free cut LED strip that provides indirect lighting (optional)

ArchiTrack System

Art. 2J48 End feeder



Feeder for Architrack Indirect Uplight only

36 x 26.8 x 29 mm
[1.42" x 1.06" x 1.14"]

Art. 2G97 Power Supply



24VDC power supply (100W)
Available for 24V ArchiTrack Indirect Uplight only

H: 18 x W: 30 x L: 350 mm
[H: 0.71" x W: 1.18" x L: 13.78"]

Art. 4611 ArchiTrack Indirect Uplight

Free cut LED strip that provides indirect lighting | DC24V 15W/m



L: 5m/roll

W: 10 x H: 5.5 x L: 5m/roll
[W: 0.39" x H: 0.22" x L: 0.20"]

CCT:
27 2700K
30 3000K
35 3500K
40 4000K

Architrack Indirect Uplight is optional and can be ordered separately together with **Art. 2J48** + **Art. 2H45**. Please see pages 21, 39 & 41 for more details.



Pendant ArchiTrack with ArchiTrack Indirect Uplight.




Pendant ArchiTrack with no ArchiTrack Indirect Uplight.

Mounting Installation Kits

Screw Installation


Surface Mount




Surface Kit

Art. 9225


(optional)







Pendant Kit

Art. 9226

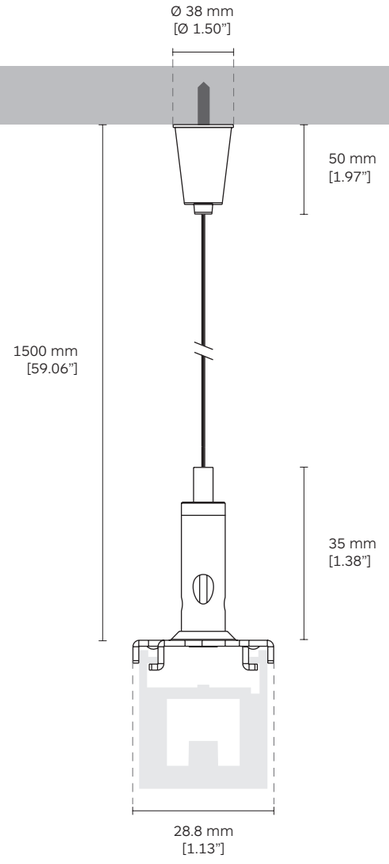

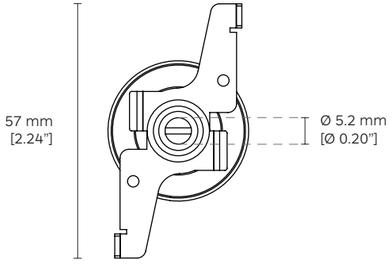

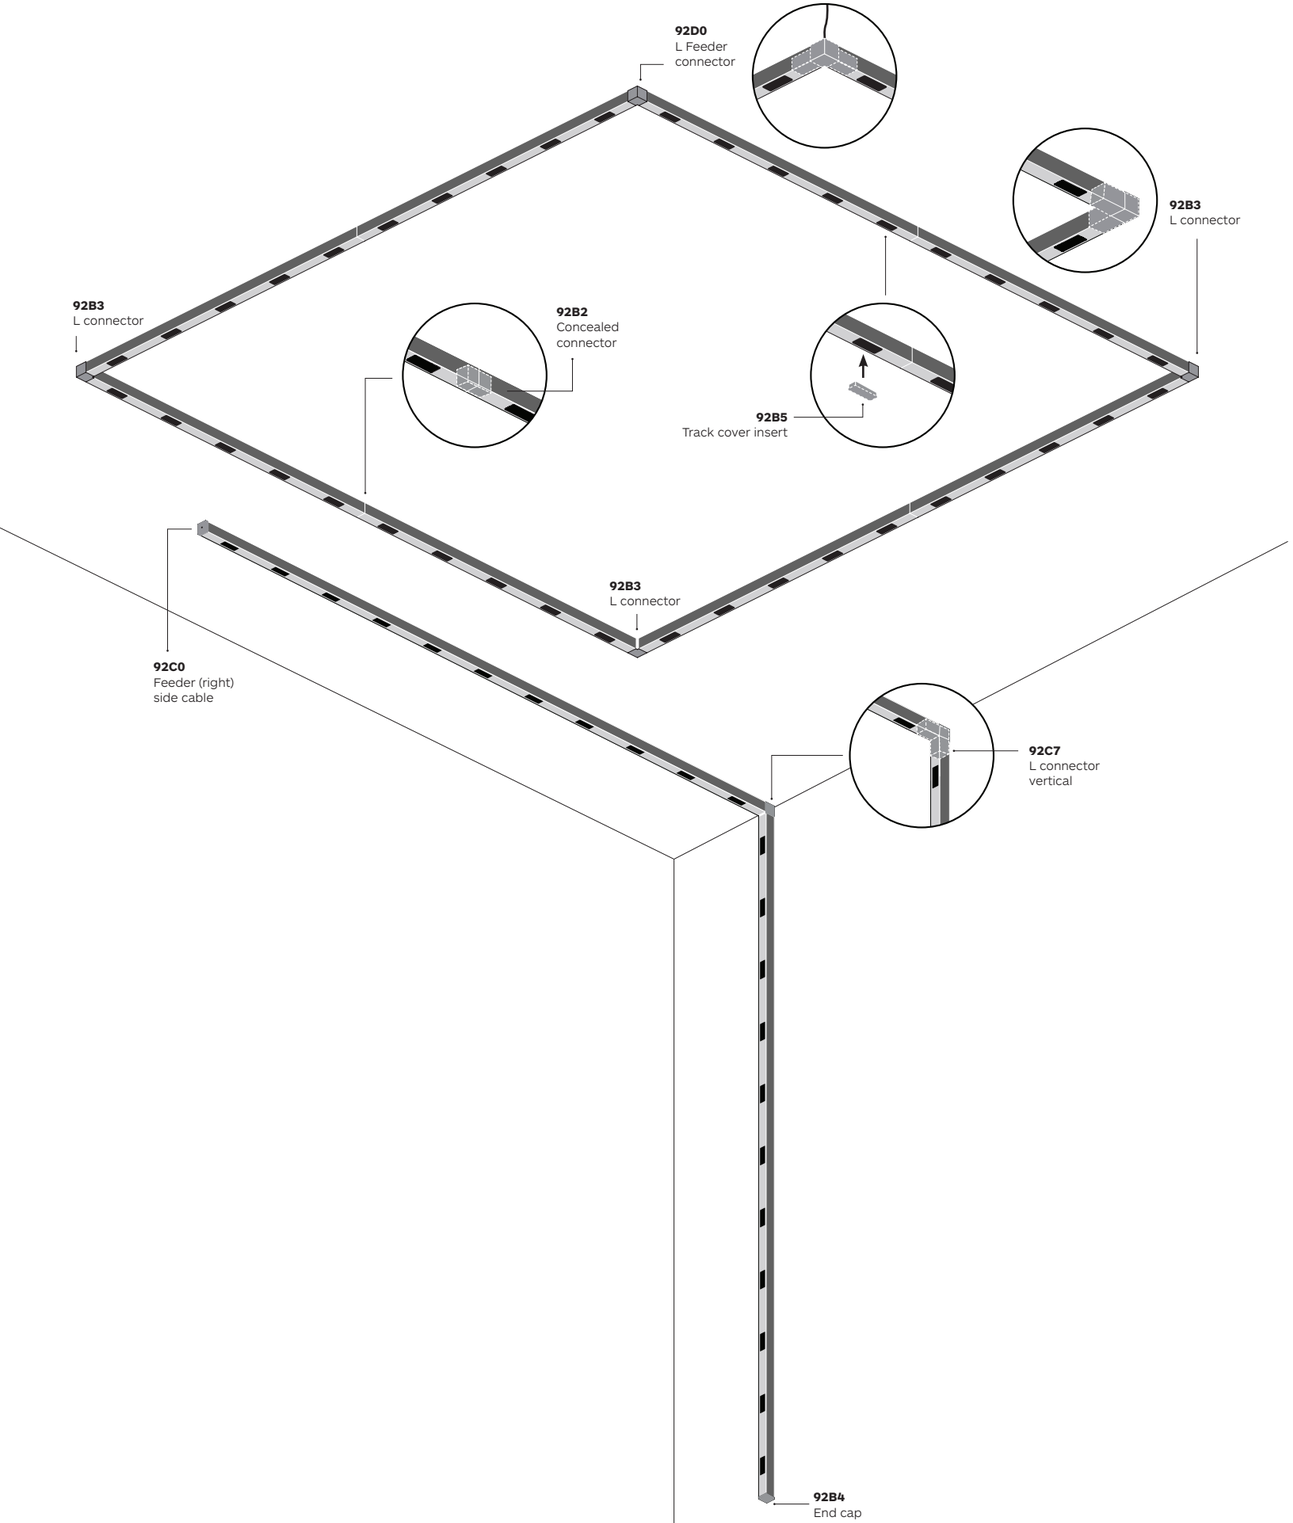

ArchiTrack System


Installation Components

54 - *Embossed Matt White*

65 - *Embossed Matt Black*




92B0 Feeder (left) side cable






92C0 Feeder (right) side cable






92B1 Feeder (left) cable up






92C1 Feeder (right) cable up






92D0 L Feeder Connector (left)






92D1 L Feeder Connector (Right)






2J48 Feeder for Architrack Indirect Uplight






92C6 Flexible connector






92C2 L connector (right)





92B3 L connector



formalighting


Installation Components

54 - *Embossed Matt White*

65 - *Embossed Matt Black*




92C7 L connector vertical






92B2* Concealed connector






92C5 X connector






92C3 T connector (left)






92C4 T connector (right)






92B4 End cap






92B5 Track cover insert






2J33 Track cutting Jig





2J49 In Track 0-10V dimmer. Compatible only with track fixtures with D1 dimming code.





Notes:

* *Accessories code 92B2 available in colour 10 only.*


Fixtures Compatibility


Viivo Series

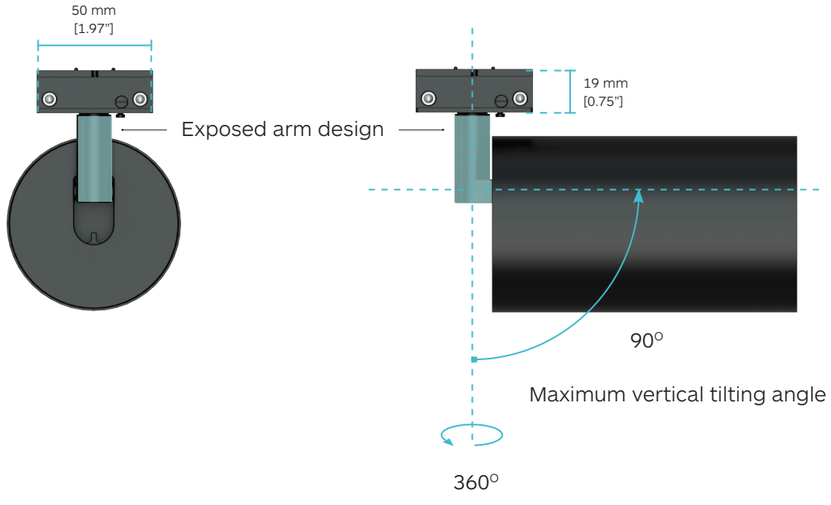

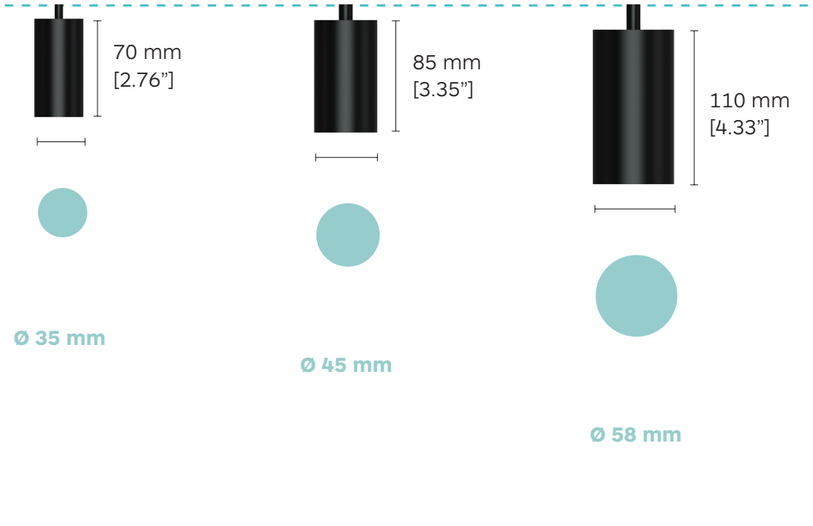

TicTok Series

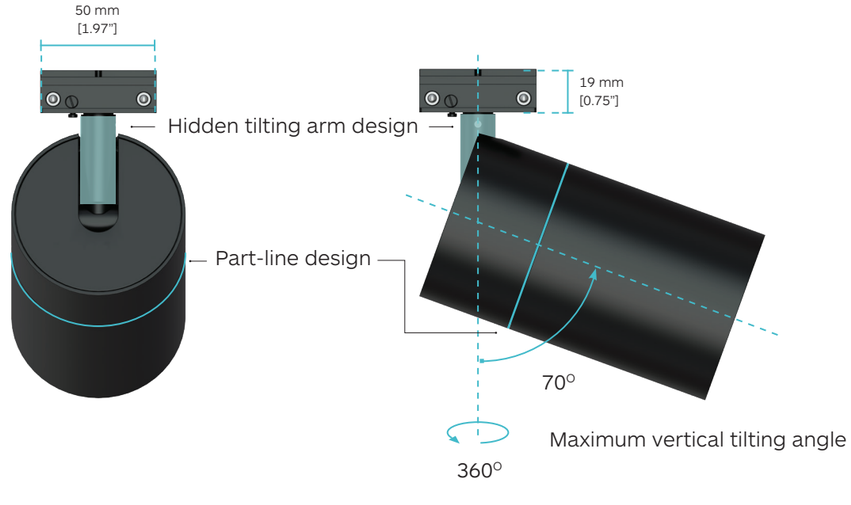

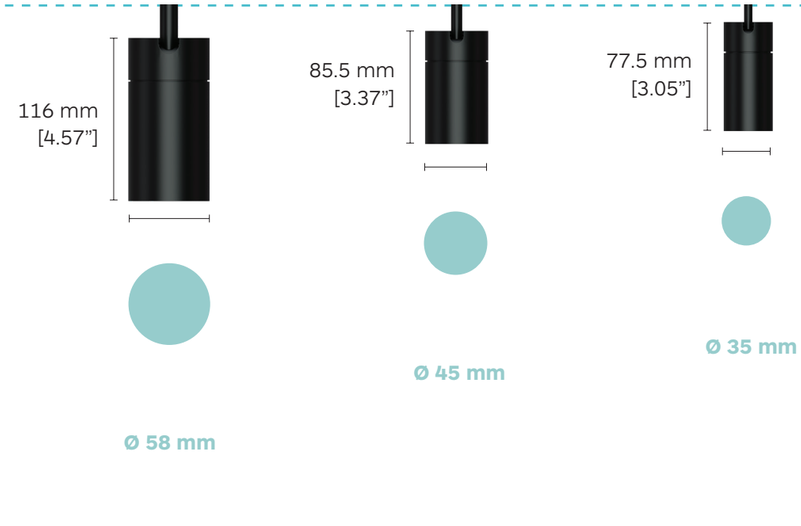

formalighting

TicTok ArchiTrack

35 I 45 I 58 I 75 I Zoom 45, 58 & 75

TicTok ArchiTrack allows users to develop customized lighting schemes and configurations.

Designed for energy efficiency, the system is mounted on a 48V ArchiTrack platform and features an integrated driver within the track adapter. The design prioritizes aesthetic appeal, consistent fixture spacing, and modularity.

Tool-free, interchangeable LED modules enhance design flexibility and simplify on-site maintenance. The system is available in four adjustable light head sizes - Ø35, Ø45, Ø58, and Ø75 mm - offering a versatile aiming range with 70° tilt and 360° rotation.

TicTok ArchiTrack is available with Casambi and other control options.

ArchiTrack System

TicTok ArchiTrack


35 | 45 | 58 | 75




48V | CE | IP20 | 360° | 70°

65 | 5A | 1Y | 27


96T1




96T2



96T3



96T4



		Product Code [1]	Light Source Code	LED Power	Nominal Lumen	Beam Angle (BA°)
CRI>90 3000K High Efficacy	TicTok 35 ArchiTrack	**96T1**	**BH23**	5.2W	761 lm	**16°** / **24°** / **34°**
	TicTok 45 ArchiTrack	**96T2**	**E091**	9W	1357 lm	**18°** / **26°** / **36°**
	TicTok 58 ArchiTrack	**96T3**	**E093**	11W	1586 lm	**12°**
			E097	14W	2240 lm	**18°** / **25°** / **35°**
	TicTok 75 ArchiTrack	**96T4**	**E098**	18W	2723 lm	**14°** / **26°** / **38°**
CRI>97 3000K High Rendering	TicTok 35 ArchiTrack	**96T1**	**BC36**	5W	620 lm	**20°** / **24°** / **38°**
	TicTok 45 ArchiTrack	**96T2**	**JC02**	10W	922 lm	**12°**
				9W	975 lm	**18°** / **26°** / **38°**
	TicTok 58 ArchiTrack	**96T3**	**JC01**	15W	1418 lm	**12°** / **18°**
				14W	1590 lm	**24°** / **34°**
	TicTok 75 ArchiTrack	**96T4**	**E007**	19W	1651 lm	**10°** / **25°** / **38°**

Dimming Options	
D0	No Dim
DN [3]	On board Dim
D1	0-10V Dim
DC	CASAMBI
DR	Dim by Power Supply Unit

CCT Options [2]	
27	2700K
30	3000K
35	3500K
40	4000K

[1] For complete code ordering information, please see page 43. [2] Other CCT options available on request. [3] Dimming option (DN) on board dim is not available for 9T61.
For the most updated product information, please go to our website.


TicTok ArchiTrack

Zoom 45, 58 & 75




Zoom Spot options:
12° ••• 47°


96T5



96T6



96T7



		Product Code [1]	Light Source Code	LED Power	Nominal Lumen	Beam Angle (BA°)
CRI>90 3000K High Efficacy	TicTok **Zoom** 45 ArchiTrack	**96T5**	**E099**	5W	761 lm	**BS** (15° - 46°)
	TicTok **Zoom** 58 ArchiTrack	**96T6**	**E100**	11W	1586 lm	**BS** (16° - 34°)
	TicTok **Zoom** 75 ArchiTrack	**96T7**	**E101**	18W	2723 lm	**BS** (15° - 28°)
CRI>97 3000K High Rendering	TicTok **Zoom** 45 ArchiTrack	**96T5**	**E077**	5.5W	606 lm	**BS** (15° - 47°)
	TicTok **Zoom** 58 ArchiTrack	**96T6**	**E030**	15W	1418 lm	**BS** (17° - 34°)
	TicTok **Zoom** 75 ArchiTrack	**96T7**	**E035**	19W	1651 lm	**BS** (12° - 28°)

Dimming Options	
D0	No Dim
DN	On board Dim
D1	0-10V Dim
DC	CASAMBI
DR	Dim by Power Supply Unit

CCT Options [2]	
27	2700K
30	3000K
35	3500K
40	4000K

[1] For complete code ordering information, please see page 43. [2] Other CCT options available on request.
For the most updated product information, please go to our website.

Viivo ArchiTrack

35 I 45 I 58 I 75 I Zoom 45, 58 & 75

Viivo ArchiTrack allows users to develop customized lighting schemes and configurations.

Designed for energy efficiency, the system is mounted on a 48V ArchiTrack platform and features an integrated driver within the track adapter. The design prioritizes aesthetic appeal, consistent fixture spacing, and modularity.

Tool-free, interchangeable LED modules enhance design flexibility and simplify on-site maintenance. It is available in four adjustable light head sizes - Ø35, Ø45, Ø58, and Ø75 mm - offering a versatile aiming range with 90° tilt and 360° rotation.


Viivo ArchiTrack is available with Casambi and other control options.

ArchiTrack System


Viivo ArchiTrack

35 | 45 | 58 | 75







96T8




96T9




96U0



96U1



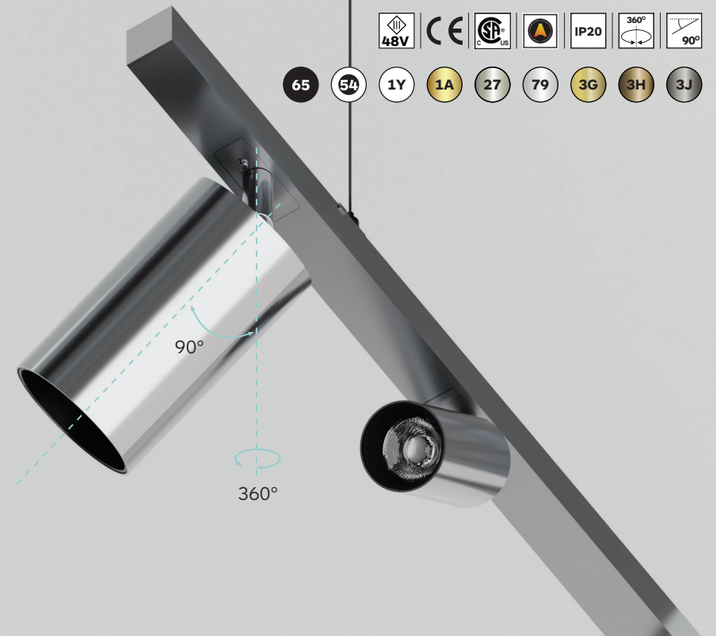

48V | CE | IP20 | 360° | 90°

65 | 54 | 1Y | 1A | 27 | 79 | 3G | 3H | 3J

		Product Code [1]	Light Source Code	LED Power	Nominal Lumen	Beam Angle (BA°)
CRI>90 3000K High Efficacy	Viivo 35 ArchiTrack	**96T8**	**BH23**	5.2W	761 lm	**16°** / **24°** / **34°**
	Viivo 45 ArchiTrack	**96T9**	**E091**	9W	1357 lm	**18°** / **26°** / **36°**
	Viivo 58 ArchiTrack	**96U0**	**E093**	11W	1586 lm	**12°**
			E097	14W	2240 lm	**18°** / **25°** / **35°**
	Viivo 75 ArchiTrack	**96U1**	**E098**	18W	2723 lm	**14°** / **26°** / **38°**
CRI>97 3000K High Rendering	Viivo 35 ArchiTrack	**96T8**	**BC36**	5W	620 lm	**20°** / **24°** / **38°**
	Viivo 45 ArchiTrack	**96T9**	**JC02**	10W	922 lm	**12°**
				9W	975 lm	**18°** / **26°** / **38°**
	Viivo 58 ArchiTrack	**96U0**	**JC01**	15W	1418 lm	**12°** / **18°**
				14W	1590 lm	**24°** / **34°**
	Viivo 75 ArchiTrack	**96U1**	**E007**	19W	1651 lm	**10°** / **25°** / **38°**

Dimming Options

D0	No Dim
DN [3]	On board Dim
D1	0-10V Dim
DC	CASAMBI
DR	Dim by Power Supply Unit

CCT Options [2]

27	2700K
30	3000K
35	3500K
40	4000K

[1] For complete code ordering information, please see page 43. [2] Other CCT options available on request. [3] Dimming option (DN) on board dim is not available for 9T68.
For the most updated product information, please go to our website.


formalighting

Viivo ArchiTrack


Zoom 45, 58 & 75




Zoom Spot options:
12° ••• 47°

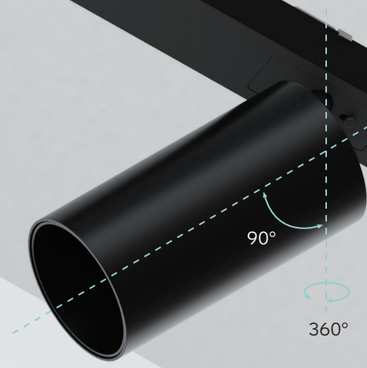


96U2



96U3



96U4



		Product Code [1]	Light Source Code	LED Power	Nominal Lumen	Beam Angle (BA°)
CRI>90 3000K High Efficacy	Viivo **Zoom** 45 ArchiTrack	**96U2**	**E099**	5W	761 lm	**BS** (15° - 46°)
	Viivo **Zoom** 58 ArchiTrack	**96U3**	**E100**	11W	1586 lm	**BS** (16° - 34°)
	Viivo **Zoom** 75 ArchiTrack	**96U4**	**E101**	18W	2723 lm	**BS** (15° - 28°)
CRI>97 3000K High Rendering	Viivo **Zoom** 45 ArchiTrack	**96U2**	**E077**	5.5W	606 lm	**BS** (15° - 47°)
	Viivo **Zoom** 58 ArchiTrack	**96U3**	**E030**	15W	1418 lm	**BS** (17° - 34°)
	Viivo **Zoom** 75 ArchiTrack	**96U4**	**E035**	19W	1651 lm	**BS** (12° - 28°)

Dimming Options		CCT Options [2]	
D0	No Dim	**27**	2700K
DN	On board Dim	**30**	3000K
D1	0-10V Dim	**35**	3500K
DC	CASAMBI	**40**	4000K
DR	Dim by Power Supply Unit		

[1] For complete code ordering information, please see page 43. [2] Other CCT options available on request.
For the most updated product information, please go to our website.

LED Modules & Lens compatibility

For TicTok & Viivo ArchiTrack products

Product compatibility	LED Module	CRI	LED Power	LENS Compatibility Code				
				16°	**20°**	**24°**	**34°**	**36°**
TicTok 35 Code: 96T1	**BH23**	CRI› 90	5W	L049	/	L050	L051	/
Viivo 35 Code: 96T8	**BC42**	CRI› 97		L049	/	L050	/	L051

Product compatibility	LED Module	CRI	LED Power	LENS Compatibility Code				
				12°	**18°**	**26°**	**36°**	**38°**
TicTok 45 Code: 96T2	**E091**	CRI› 90	9W	/	L043	L044	L045	/
	JC02	CRI› 97	9W	/	L043	L044	/	L045
Viivo 45 Code: 96T9	**JC02**	CRI› 97	10W	L043	/	/	/	/

Product compatibility	LED Module	CRI	LED Power	LENS Compatibility Code					
				12°	**18°**	**24°**	**25°**	**34°**	**35°**
TicTok 58 Code: 96T3 **Viivo 58** Code: 96U0	**E093**	CRI› 90	11W	L004	/	/	/	/	/
	E097	CRI› 90	14W	/	L004	/	L005	/	L006
	JC01	CRI› 97	14W	/	/	L041	/	L042	/
	JC01	CRI› 97	15W	L040	L041	/	/	/	/

Product compatibility	LED Module	CRI	LED Power	LENS Compatibility Code				
				10°	**14°**	**25°**	**26°**	**38°**
TicTok 75 Code: 96T4	**E098**	CRI› 90	18W	/	L008	/	L009	L010
Viivo 75 Code: 96U1	**E007**	CRI› 97	19W	L008	/	L009	/	L010

Accessories







Product / Accessories	Coloured Glasses Diffuser	Opal Diffuser	Spread Lens	Elliptical Beam Diffuser	Wide Texture Honeycomb Louvre
	Colours 25, 42, 55, 85		Colour 41		Colour 10
TicTok 35 & Viivo 35	**2G58**	**2G60**	**/**	**2G62**	**2G31**
TicTok 45 [1] & Viivo 45 [1]	**2F91**	**2F94**	**2F97**	**2F88**	**2F71**
TicTok 58 [1] & Viivo 58 [1]	**2F92**	**2F95**	**2F98**	**2F89**	**2F83**
TicTok 75 [1] & Viivo 75 [1]	**2F93**	**2F96**	**2F99**	**2F90**	**2F84**







Product / Accessories	Dense Texture Honeycomb Louvre	Cross blade Louvre	Barn Doors	Wallwasher Cone 45°	ArchiTrack Indirect Uplight
	Colour 10	Colours 10	Colour 10	Colours 10, 17, 54, 65, 1Y	
TicTok 35 & Viivo 35	**2G33**	**/**	**/**	**/**	
TicTok 45 [1] & Viivo 45 [1]	**2F85**	**2G01**	**2G04**	**2G07**	
TicTok 58 [1] & Viivo 58 [1]	**2F86**	**2G02**	**2G05**	**2G08**	
TicTok 75 [1] & Viivo 75 [1]	**2F87**	**2G03**	**2G06**	**2G09**	
ArchiTrack Indirect Uplight x pendant track installation					**4611**


Notes:

[1] *No optical accessories are available for TicTok & Viivo 45, 58 & 75 Zoom series.*

formalighting

Driver Options

No Dim (D0) / On board Dim (DN)

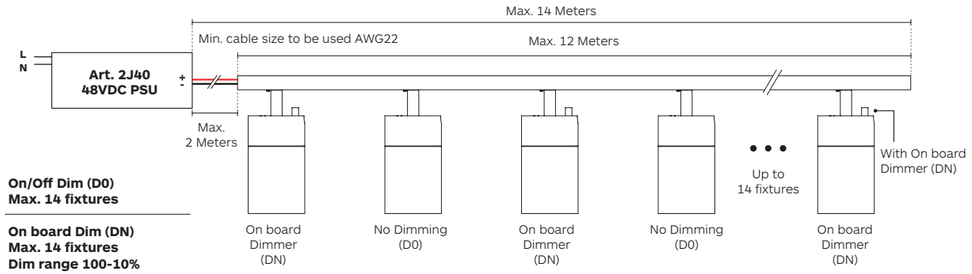

On/Off Dim (D0)
Max. 14 fixtures

On board Dim (DN)
Max. 14 fixtures
Dim range 100-10%
Dim to off - Yes
Individual fixture control - Yes

CASAMBI Dim (DC)


CASAMBI unit is installed in each fixture

Max. 14 fixtures (DC)
Dim range 100-1%
Dim to off - Yes
Individual fixture control - Yes

DALI Dim (DR) by Power Supply Unit (PSU)


Max. 14 fixtures (DR)
Dim range 100-1%
Dim to off - Yes
Individual fixture control - No

0-10V Dim (D1)

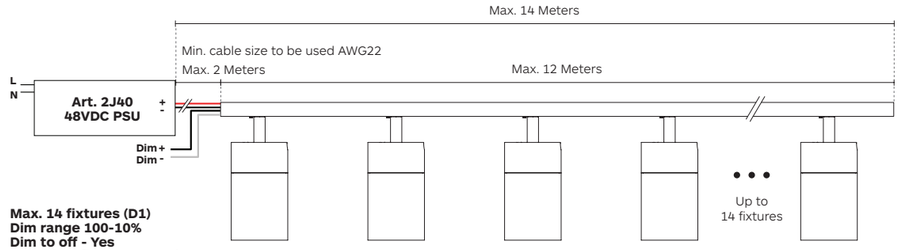


Max. 14 fixtures (D1)
Dim range 100-10%
Dim to off - Yes
Individual fixture control - No
The 0-10V dimming signal comes from an external source and is not generated by the power supply.

Art. 2J49
In Track 0-10V dimmer
(compatible only with track fixtures with D1 dimming code)




Wiring diagram featuring ArchiTrack Indirect Uplight

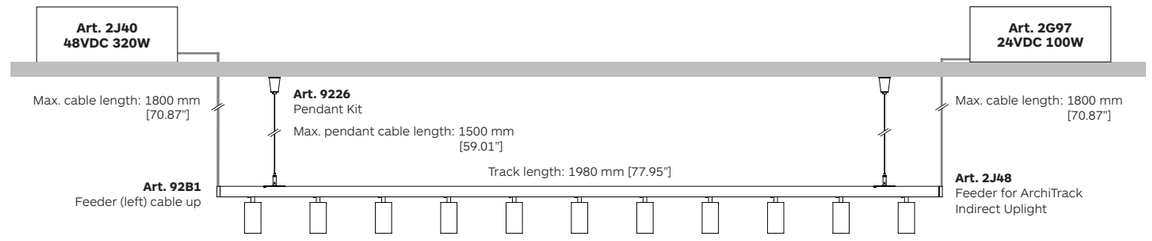

Power Supply






48VDC 320W Dimmable

Available for on/off, DALI, on-board or CASAMBI dimmable fixtures





24VDC power supply (100W)

Available for 24V ArchiTrack Indirect Uplight only

Code	2J40	2G97
Size	63 x 280 x 33 mm [2.48" x 11.02" x 1.30"]	30 x 350 x 18 mm [1.18" x 13.78" x 0.71"]

Power Supply to be ordered separately.

Symbols & Icons

Code system
Global presence

Symbols & Icons

48V input Class III	
Zoom	
Degree of Ingress Protection*	IP__
CASAMBI	
Interchangeable All sizes	

Certification Icons


European Economic Area
Declares that the product complies with all applicable European Union safety, health, and environmental protection requirements.

Canada US
Indicates that the product has been tested and meets Canadian and North American standards requirements standards for safety and performance.

Body Color




1Y Embossed matt total white (RAL 9016)




54 Embossed matt white (RAL 9016)




65 Embossed matt black (RAL 9017)




27 Chrome Polished




1A Chrome Gold




79 Brushed Alumnium



3G Brushed Brass



3H Antique Brass



3J Blackened Brass

Code System

Code ordering example: **9 6 T 3 J C 0 1 - 9 7 3 0 1 2 D 0 2 7**

7	Body colour
6	Dimming options
5	Beam angle
4	CCT-LED colour temperature
3	LED CRI
2	Light source code
1	Product code

LED CRI	
90	CRI > 90
97	CRI > 97

CCT-LED Colour temperature	
27	Warm White 2700K
30	Warm White 3000K
35	Warm White 3500K
40	Neutral White 4000K

Dimming Options	
D0	No Dim
DN	On board Dim
D1	0-10V Dim
DC	CASAMBI
DR	Dim by Power Supply Unit (PSU)

Body Colour	
1Y	Embossed matt total white (RAL 9016)
54	Embossed matt white (RAL 9016)
65	Embossed matt black (RAL 9017)
27	Chrome Polished
1A	Chrome Gold
79	Brushed Alumnium
3G	Brushed Brass
3H	Antique Brass
3J	Blackened Brass

How to order



1Y - Embossed Matt Total White
54 - Embossed Matt White
65 - Embossed Matt Black
27 - Chrome Polished

	Product Code	Light Source Code	LED Power	Nominal Lumen	Beam Angle (BA°)
TicTok 35 ArchiTrack	**96T1**	**BC36**	5W	620 lm	**20° / 24° / 38°**
TicTok 45 ArchiTrack	**96T2**	**JC02**	10W	922 lm	**12°**
			9W	975 lm	**18° / 26° / 38°**
TicTok 58 ArchiTrack	**96T3**	**JC01**	15W	1418 lm	**12° / 18°**

CRI>97
3000K
High Rendering

1 Product code	**96T3**
2 Light source Code	**JC01**
3 LED CRI	**97**
4 CCT-LED colour temperature	**30**
5 Beam angle	**12**
6 Dimming options	**D0**
7 Body colour	**27**

Dimming Options

D0	No Dim
DN	On board Dim
D1	0-10V Dim
DC	CASAMBI
DR	Dim by Power Supply Unit (PSU)

CCT Options

27	2700K
30	3000K
35	3500K
40	4000K

Global presence

Celebrating over 50 years of vision, dedication and innovation, formalighting's versatile and high-quality product offerings extends internationally via our headquarters in Hong Kong, London, Milan and Shanghai.
Our well chosen and selected partners as well as our affiliated international offices broaden our global presence further in markets such as USA, Australia, Japan, South East Asia, India and the Middle East.

Through our commitment to growth and investment within formalighting's professional team, infrastructure and product ranges, we are able to provide increasing service to our global retail and hospitality clients as well as lighting designers and specifiers strengthening our position as a leading international supplier of innovative architectural lighting solutions and systems.

With over 50 years' experience in designing and manufacturing architectural lighting, formalighting's comprehensive portfolio offers a competitive range of European designed and expertly engineered products that carry CB, CE, CCC and UL certifications.

Furthermore formalighting's latest award-winning motorized range of track, pendant, and recessed fixtures, featuring remote-controlled adjustable pan and tilt, dim, dim to warm, tuneable white and beam shaping lens, are available worldwide incorporating the latest, most advanced lighting technologies.

MILAN
EUROPE HEADQUARTERS

Tel (+39) 02 9354 0300
Fax (+39) 02 9343 5117
E- mail info-europe@formalighting.com

HONG KONG
ASIA HEADQUARTERS

Tel (+ 852) 2516 6500
Fax (+ 852) 2516 6525
E- mail info-asia@formalighting.com

NEW YORK
LOCAL SALES OFFICE

E- mail info-us@formalighting.com

SHANGHAI
LOCAL SALES OFFICE

E- mail info-china@formalighting.com

LONDON
LOCAL SALES OFFICE

E- mail info-uk@formalighting.com

AUSTRALIA
LOCAL SALES OFFICE

Tel (+61) 488 567 388
E- mail info-australia@formalighting.com

INDIA
LOCAL SALES OFFICE

Tel (+91) 9686351257
E- mail info-india@formalighting.com

formalighting is constantly developing and improving its products therefore all information, drawings illustrations, specifications, photometric values in this catalogue are indicatives and shall not form part of any commitment by our company that reserves the right to change specifications without prior notification or public announcement.
Technical information on the installation-instruction has precedence over the information in the catalogue.
Our general terms and conditions shall apply notwithstanding any stipulation on the contrary to all the orders and agreement with formalighting. You can obtain a copy of these conditions on demand.

Publication date: November 2026
©Copyright formalighting

With thanks to all contributors for the realization of this catalogue

Designed by formalighting's Graphic Design Department

No part of this catalogue may be copied without written authorization of formalighting

formalighting

MILAN

-

LONDON

-

USA

-

HONG KONG

-

SHANGHAI

-

INDIA