formalighting

Solo Series

2026

Solo Series

Solo XXS

Solo XS

Solo S


Solo M | M 70 | Wallwasher


Solo L | L 70 | Wallwasher


Solo


Index pages: P.6-P.7


Solo Series

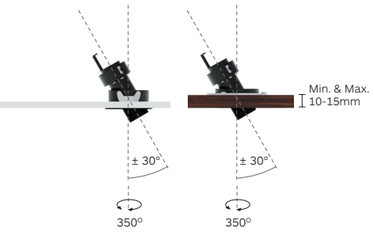

























Trimless ○
Trimless Millwork ○
Ø 44.6




Trim ○
Ø 55

Trimless ○
Trimless Millwork ○
Ø 54.5




Trim ○
Ø 65


Trimless ○
Ø 104




Trim ○
Ø 112




Trimless ○
Ø 104



Trim ○
Ø 112




Trimless ○
Ø 96




Trim ○
Ø 112

Trimless ○
Ø 96




Trim ○
Ø 112

Trimless ○
Ø 104




Trim ○
Ø 112

Trimless ○
Ø 153



Trim ○
Ø 168

Trimless □
□ 102




Trim ■
□ 112



Ø 25

Trimless □
□ 102



Trim ■
□ 112



Ø 36


Trimless □
□ 102

Trim ■
□ 112



Ø 42

Trimless □
□ 102




Trim ■
□ 112



Ø 55

Trimless □
151 W x 144 H



Trim ■
□ 168



Ø 55

Solo XXS

Solo XS

Solo S

Solo M

Solo M Wallwasher

Solo M 70

Solo L

Solo L Wallwasher

Solo L 70


Solo

formalighting

Solo Series Optics

Solo XXS		17°		25°	30°		45°	
Solo XS		17°		25°	30°		45°	
Solo S		14°		22°			32°	
Solo M, Solo M70		14°	18°	26°			38°	
Solo M Wallwasher	WW							
Solo L, Solo L70		12°	18°	24°			34°	36°
Solo L Wallwasher	WW							
Solo		12°	18°	24°	25°		32°	35°

Solo Series Index

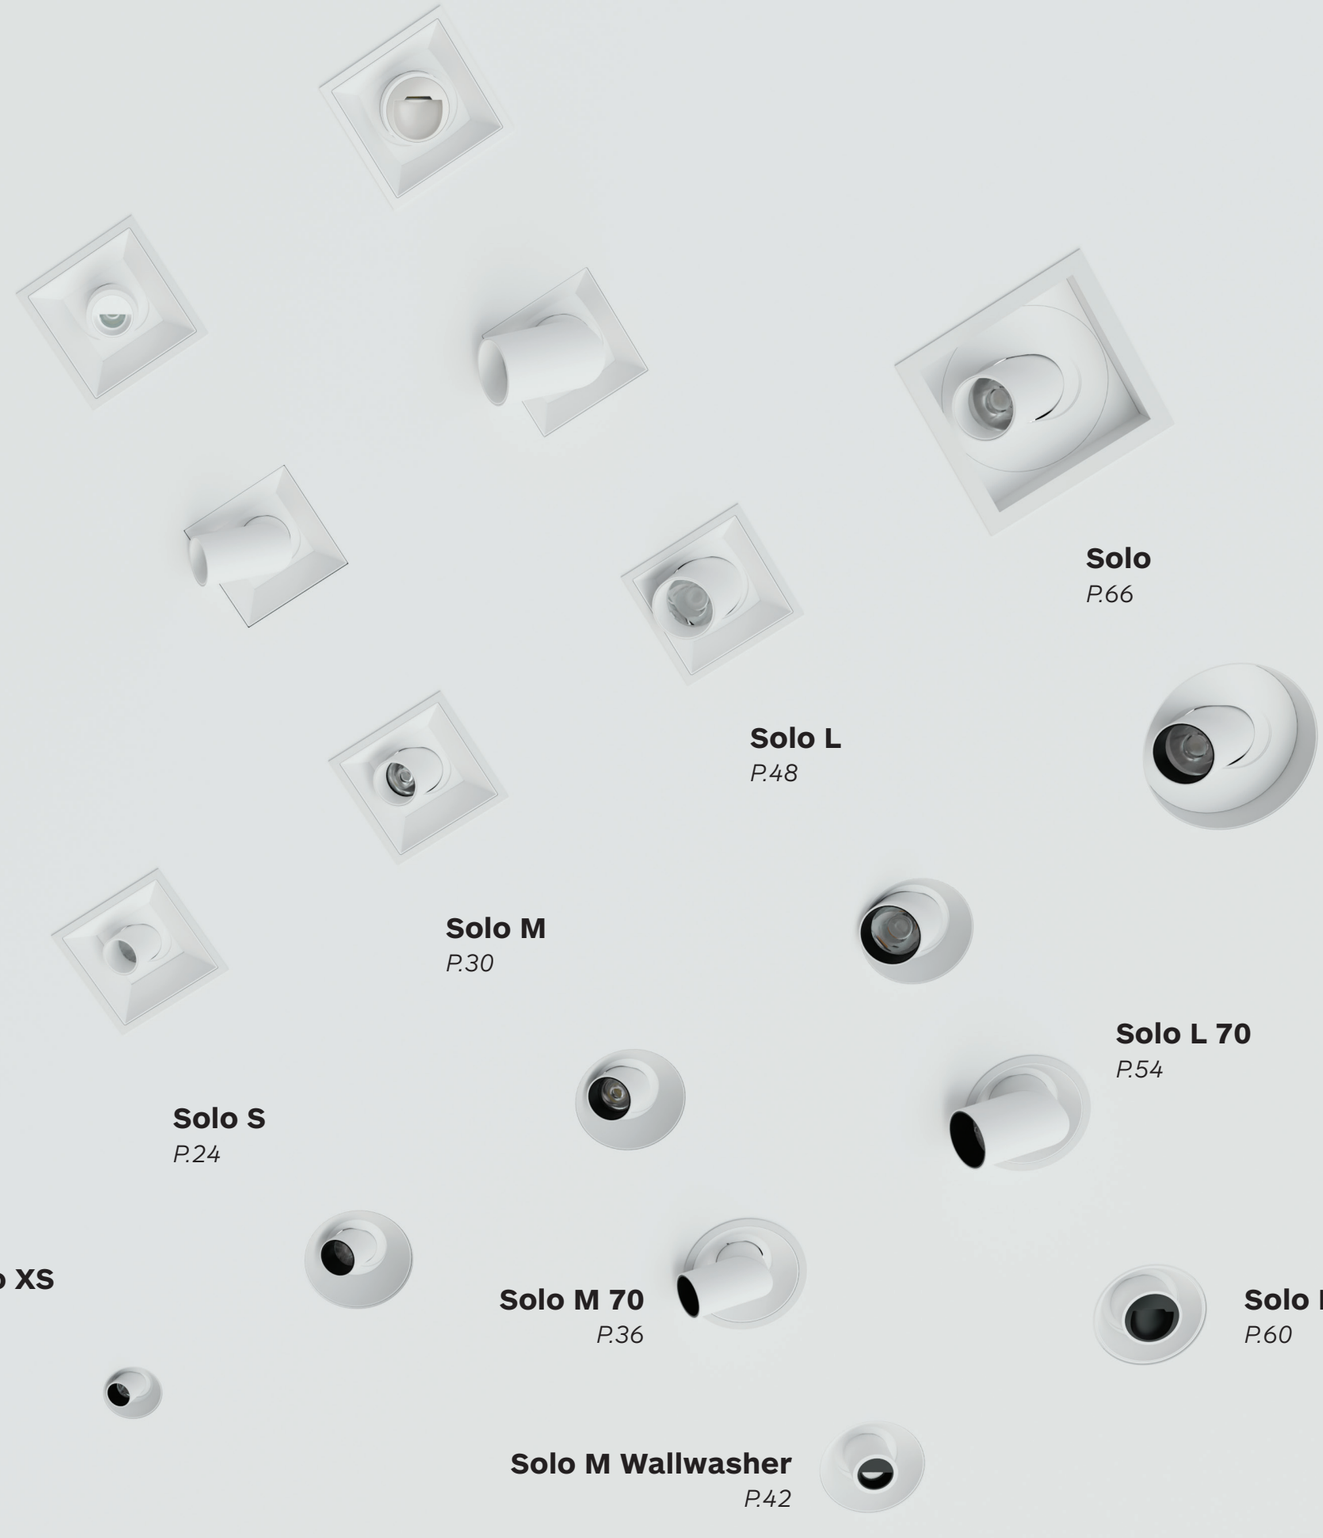

Solo
P.66

Solo L
P.48

Solo M
P.30

Solo L 70
P.54

Solo S
P.24

Solo XS
P.18

Solo M 70
P.36

Solo L Wallwasher
P.60

Solo XXS
P.12

Solo M Wallwasher
P.42


Solo XXS Round







1:1




Solo XXS

IP20 · 30° 30° · 350°


Available finishes - 54 · 11 · 1Y · 65 · 10

Solo XXS Round


Trim ○ **RS10**



Trimless ○ **RS11**

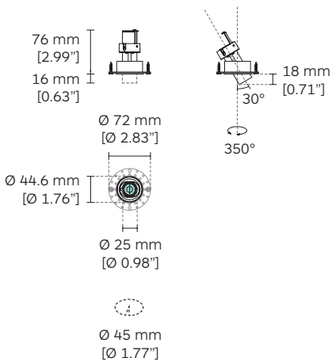

Trimless (for Millwork) ○ **RU19**

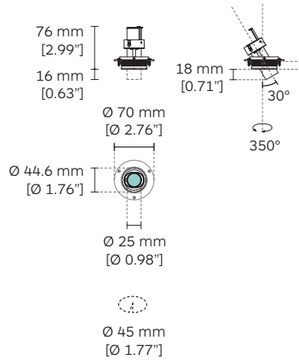

Solo XXS Round

Product Code		Light Sources Code	CRI & CCT	LED Power	Nominal Lumen	Beam Angle (BA°)
RS10	●	**MH23**	CRI>90 3000K **High Efficacy**	5.2W	761 lm	**17°** / **25°** / **30°** / **45°**
RS11	○					
RU19	○	**MC42**	CRI>97 3000K **High Rendering**	5.5W	606 lm	

Dimming Options		CCT Options	
D0	No Dim	**27**	2700K
D1	0-10V Dim	**30**	3000K
DA	Dali Dim	**35**	3500K
DC	CASAMBI	**40**	4000K
DP	Phase Dim		

All dimensions in the catalogue in mm & [inches].
For the most updated product information, please go to our website.

54 - Embossed Matt White

11 - White

1Y - Embossed Matt Total White

65 - Embossed Matt Black

10 - Black



Solo XXS

Round



formalighting

Solo XXS

The Solo XXS is a recessed spotlight body constructed from cast aluminum, offered in trim, trimless, and millwork configurations. Its distinctive pull-down mechanism allows the Solo XXS to serve multiple functions: as a downlight, a regressed accent light, or an exposed lamp head capable of replicating a surface or track fixture. The specially designed head is fully adjustable, featuring a vertical tilt of up to 30° and horizontal rotation of up to 350°.

Ideally suited for showcase and display applications.

For complete code ordering information, please see page 77.


Solo XS Round







1:1




Solo XS

IP20 · 30° 30° · 350°


Available finishes - 54 · 11 · 1Y · 65 · 10

Solo XS Round


Trim ○ **RT89**



Trimless ○ **RT90**

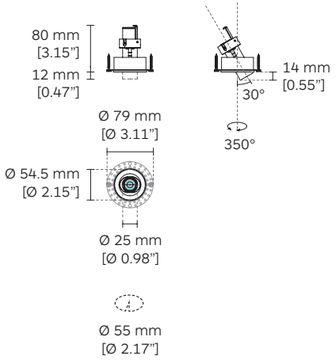

Trimless (for Millwork) ○ **RT91**

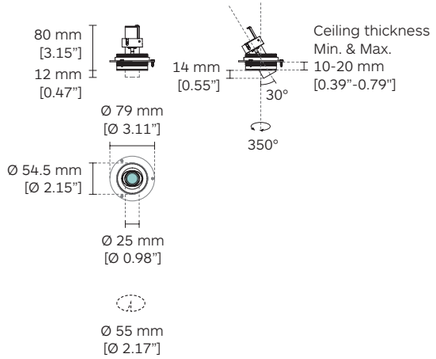

Solo XS Round

Product Code		Light Sources Code	CRI & CCT	LED Power	Nominal Lumen	Beam Angle (BA°)
RT89	●	**MH23**	CRI>90 3000K **High Efficacy**	5.2W	761 lm	**17°** / **25°** / **30°** / **45°**
RT90	○					
RT91	○	**MC42**	CRI>97 3000K **High Rendering**	5.5W	606 lm	

Dimming Options		CCT Options	
D0	No Dim	**27**	2700K
D1	0-10V Dim	**30**	3000K
DA	Dali Dim	**35**	3500K
DC	CASAMBI	**40**	4000K
DP	Phase Dim		

All dimensions in the catalogue in mm & [inches].
For the most updated product information, please go to our website.

Solo XS
Round

- **54** - Embossed Matt White
- **11** - White
- **1Y** - Embossed Matt Total White
- **65** - Embossed Matt Black
- **10** - Black







formalighting

Solo XS

The Solo XS is a recessed spotlight body fabricated from cast aluminum, available in trim, trimless, and millwork configurations. Its distinctive pull-down mechanism enables the Solo XS to perform multiple functions: as a downlight, a regressed accent light, or an exposed lamp head capable of emulating a surface or track fixture. The specially engineered head is fully adjustable, offering a vertical tilt of up to 30° and horizontal rotation of up to 350°.

Optimally suited for showcase and display applications.

For complete code ordering information, please see page 77.

Solo S Round & Square






Solo S Round & Square

IP20 · 40° 40° · 350°

Available finishes - 54 · 11 · 1Y · 65 · 10

Solo S Round


Trim ○ **RQ85**



Trimless ○ **RQ86**

Solo S Square

Trim □ **RR02**



Trimless □ **RR03**

Solo S Round & Square


Product Code	Light Sources Code	CRI & CCT	LED Power	Nominal Lumen	Beam Angle (BA°)
RQ85 ○	**MH23**	CRI>90 3000K **High Efficacy**	9.1W	1160 lm	**14°** / **22°** / **32°**
RQ86 ○					
RR02 □	**MC42**	CRI>97 3000K **High Rendering**	12W	1053 lm	
RR03 □					

Dimming Options		CCT Options	
D0	No Dim	**27**	2700K
D1	0-10V Dim	**30**	3000K
DA	Dali Dim	**35**	3500K
DC	CASAMBI	**40**	4000K
DP	Phase Dim		


All dimensions in the catalogue in mm & [inches].
For the most updated product information, please go to our website.

- **54** - Embossed Matt White
- **11** - White
- **1Y** - Embossed Matt Total White
- **65** - Embossed Matt Black
- **10** - Black









Solo
Round & Square

formalighting

Solo S

The Solo S series are a recessed spotlight body in cast aluminum available in trim and trimless versions. Solo S comes in downlight wallwasher and Zoom versions for multiple applications.

The unique pull-down mechanism enables the Solo S to function as either a downlight, a regressed accent light, or an exposed lamp head able to emulate a surface or track fixture. The special head design of Solo S is fully adjustable with vertical tilt up to 40° and rotatable horizontally up to 350°.


The Solo S Zoom is fully adjustable spotlight that features an onboard beam angle adjustment of 8-57°.

Perfect for museums and galleries applications.

For complete code ordering information, please see page 77.

Solo M Round & Square



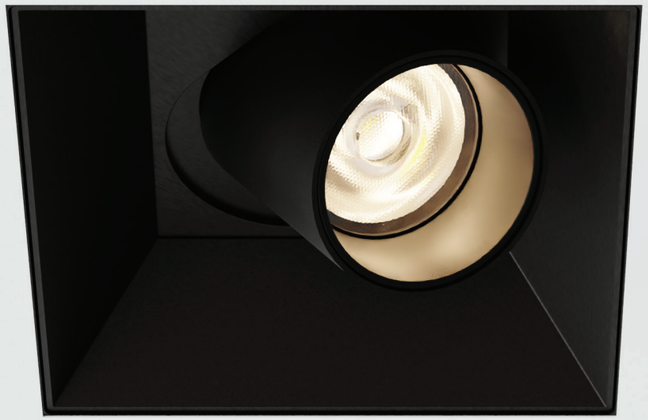


Solo M Round & Square

IP20 | 35° 35° | 350°


Available finishes - 54 11 1Y 65 10

Solo M Round

Trim ○ **RR69**




Trimless ○ **RR66**

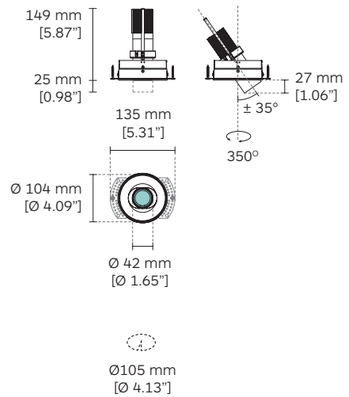


Solo M Square

Trim □ **RR75**



Trimless □ **RR74**

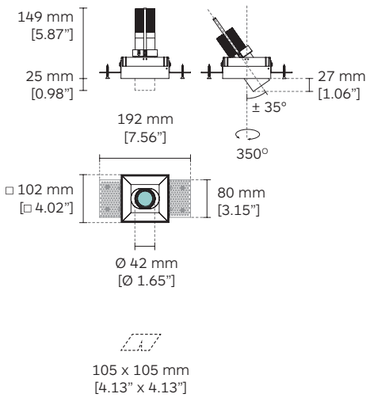

Solo M Round & Square

Product Code	Light Sources Code	CRI & CCT	LED Power	Nominal Lumen	Beam Angle (BA°)
RR69 ○	**MH21**	CRI>90 3000K **High Efficacy**	11W	1586 lm	**18°** / **26°** / **38°**
RR66 ○					
RR75 □	**LC01**	CRI>97 3000K **High Rendering**	12W	1053 lm	**14°**
RR74 □			17W	1542 lm	**18°** / **26°** / **38°**


Dimming Options		CCT Options	
D0	No Dim	**27**	2700K
D1	0-10V Dim	**30**	3000K
DA	Dali Dim	**35**	3500K
DC	CASAMBI	**40**	4000K
DP	Phase Dim		

All dimensions in the catalogue in mm & [inches].
For the most updated product information, please go to our website.

Solo M
Round & Square

- **54** - Embossed Matt White
- **11** - White
- **1Y** - Embossed Matt Total White
- **65** - Embossed Matt Black
- **10** - Black









formalighting

Solo M



The Solo M series are a recessed spotlight body in cast aluminum available in trim and trimless versions. The trim version comes with a spring for installation on a ceiling thickness 1-25mm and the trimless version comes with brackets for a ceiling thickness of 6-25mm.


The unique pull-down mechanism enables Solo M to function as either a downlight, a regressed accent light, or an exposed lamp head able to emulate a surface or track fixture. The special head design of Solo M is fully adjustable with vertical tilt up to 35° and rotatable horizontally up to 350°.

Compact, efficient, and powerful, with excellent color rendering and different color temperature options. Ideal for lighting retail environments.

For complete code ordering information, please see page 77.

Solo M 70 Round & Square



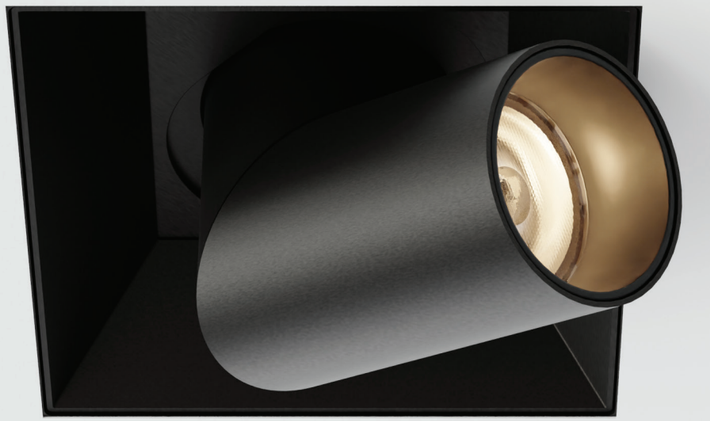

Solo M 70 Round & Square


IP20 · 35° 35° · 70° · 350°

Available finishes - 54 · 11 · 1Y · 65 · 10

Solo M 70 Round


Trim ○

RS17



Trimless ○


RS18

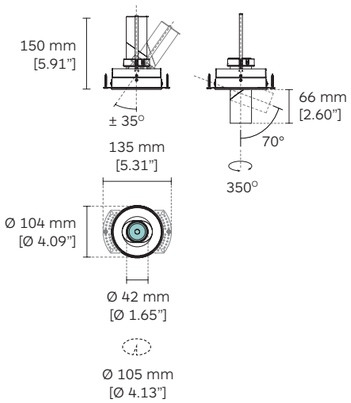

Solo M 70 Square


Trim □

RS19

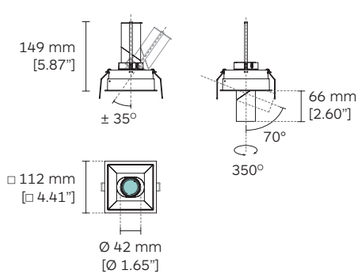

Trimless □

RS20

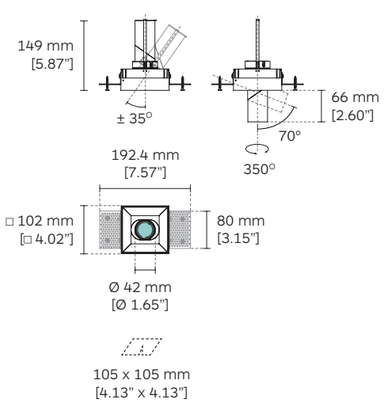

Solo M 70 Round & Square


Product Code	Light Sources Code	CRI & CCT	LED Power	Nominal Lumen	Beam Angle (BA°)
RS17 ○	**MH21**	CRI>90 3000K **High Efficacy**	11W	1586 lm	**18°** / **26°** / **38°**
RS18 ○					
RS19 □	**LC01**	CRI>97 3000K **High Rendering**	12W	1053 lm	**14°**
RS20 □			13W	1272 lm	**18°** / **26°** / **38°**

Dimming Options		CCT Options	
D0	No Dim	**27**	2700K
D1	0-10V Dim	**30**	3000K
DA	Dali Dim	**35**	3500K
DC	CASAMBI	**40**	4000K
DP	Phase Dim		

All dimensions in the catalogue in mm & [inches].
For the most updated product information, please go to our website.

- **54** - Embossed Matt White
- **11** - White
- **1Y** - Embossed Matt Total White
- **65** - Embossed Matt Black
- **10** - Black









Solo M 70

Round & Square

formalighting

Solo M 70

The Solo M 70 series are recessed spotlight body in cast aluminum available in trim and trimless versions. The trim version comes with a spring for installation on a ceiling thickness 1-25mm and the trimless version comes with brackets for a ceiling thickness of 6-25mm.


The unique pull-down mechanism enables Solo M to function as either a downlight, a regressed accent light, or an exposed lamp head able to emulate a surface or track fixture. The special light head design of Solo M 70 is fully adjustable with vertical tilt up to 70° and rotatable horizontally up to 350°.

Compact, efficient and powerful, with excellent color rendering and different color temperature options. Ideal for lighting retail environments.

For complete code ordering information, please see page 77.

Solo M Wallwasher Round & Square



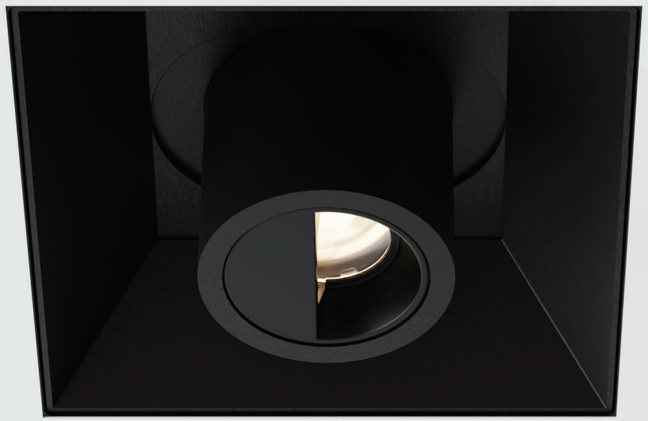


Solo M Wallwasher Round & Square

IP20 · 35° 35° · 350°


Available finishes - 54 · 11 · 1Y · 65 · 10

Solo M Wallwasher Round

Trim ○ **RS24**




Trimless ○ **RS25**

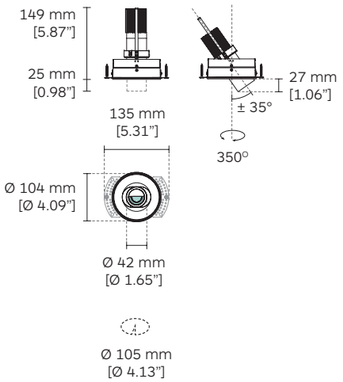


Solo M Wallwasher Square

Trim □ **RS26**



Trimless □ **RS27**

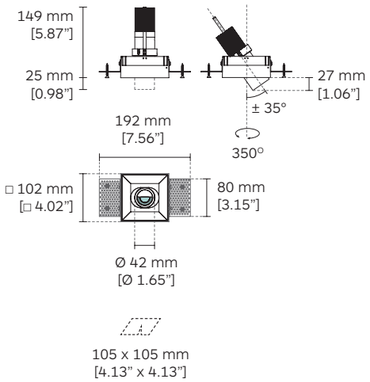

Solo M Wallwasher Round & Square

Product Code		Light Sources Code	CRI & CCT	LED Power	Nominal Lumen	Beam Angle (BA°)
RS24	○	**MC36**	CRI>90 3000K **High Efficacy**	9W	1101 lm	**WW**
RS25	○					
RS26	□		CRI>97 3000K **High Rendering**	9W	975 lm	**WW**
RS27	□					


Dimming Options		CCT Options	
D0	No Dim	**27**	2700K
D1	0-10V Dim	**30**	3000K
DA	Dali Dim	**35**	3500K
DC	CASAMBI	**40**	4000K
DP	Phase Dim		

WW = *Wallwasher.*

All dimensions in the catalogue in mm & [inches].
For the most updated product information, please go to our website.

- **54** - Embossed Matt White
- **11** - White
- **1Y** - Embossed Matt Total White
- **65** - Embossed Matt Black
- **10** - Black









Solo M Wallwasher

Round & Square

formalighting

Solo M Wallwasher

The Solo M Wallwasher series are a recessed spotlight body in cast aluminum available in trim and trimless versions.

The unique pull-down mechanism enables the Solo M wallwasher to function as either a downlight, a regressed accent light, or an exposed lamp head able to emulate a surface or track fixture.


The special head design of Solo M Wallwasher is fully adjustable with vertical tilt up to 35° and rotatable horizontally up to 350°.

Perfect for museums and galleries applications. Wallwashers achieve their amazing lighting effect with high uniformity can be used to illuminate artwork and sculptures. Vertical uniformity creates a wide and distinguished spatial impression by brightening the entire height of the wall.

For complete code ordering information, please see page 77.

Solo L Round & Square



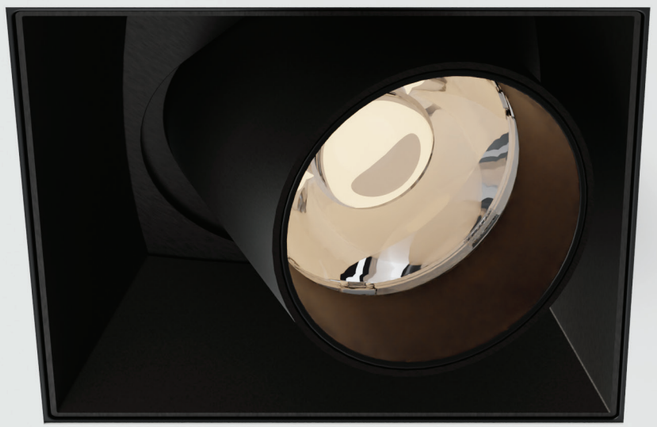


Solo L Round & Square

IP20 · 350°


Available finishes - 54 · 11 · 1Y · 65 · 10

Solo L Round

Trim ○ **RT84**




Trimless ○ **RT85**

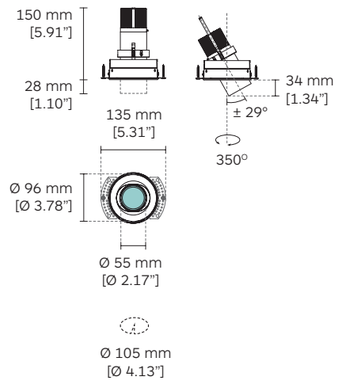


Solo L Square

Trim □ **RU11**



Trimless □ **RU12**

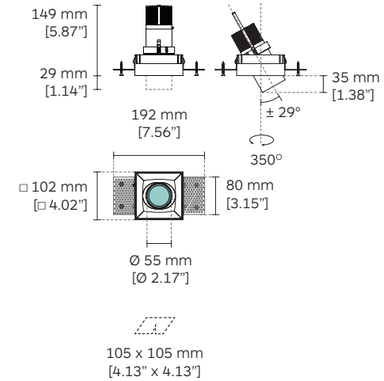

Solo L Round & Square

Product Code		Light Sources Code	CRI & CCT	LED Power	Nominal Lumen	Beam Angle (BA°)
RT84	○	**MH22**	CRI>90 3000K **High Efficacy**	18W	2723 lm	**18°** / **24°** / **36°**
RT85	○					
RU11	□	**LC05**	CRI>97 3000K **High Rendering**	19W	1651 lm	**12°** / **18°**
RU12	□			18W	1937 lm	**24°** / **34°**


Dimming Options		CCT Options	
D0	No Dim	**27**	2700K
D1	0-10V Dim	**30**	3000K
DA	Dali Dim	**35**	3500K
DC	CASAMBI	**40**	4000K
DP	Phase Dim		

All dimensions in the catalogue in mm & [inches].
For the most updated product information, please go to our website.

Solo L
Round & Square

- **54** - Embossed Matt White
- **11** - White
- **1Y** - Embossed Matt Total White
- **65** - Embossed Matt Black
- **10** - Black









formalighting

Solo L

The Solo L is a recessed spotlight body constructed from cast aluminum, available in both trim and trimless versions, as well as round and square configurations.

Its distinctive pull-down mechanism enables the Solo L to function as a downlight, a regressed accent light, or an exposed lamp head capable of emulating a surface or track fixture. The light head is fully adjustable, featuring a vertical tilt of up to 29° and horizontal rotation of up to 350°.

Ideally suited for retail and hospitality applications.

For complete code ordering information, please see page 77.

Solo L 70 Round & Square






Solo L 70 Round & Square

IP20 | 29° 29° | 70° | 350°


Available finishes - 54 11 1Y 65 10

Solo L 70 Round

Trim ○ **RT86**




Trimless ○ **RT87**

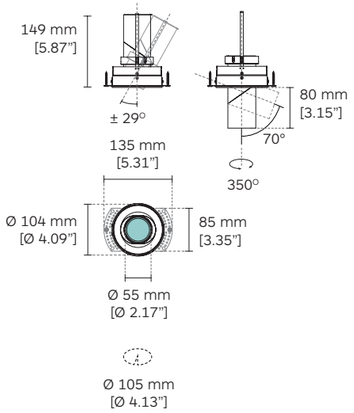


Solo L 70 Square

Trim □ **RU13**

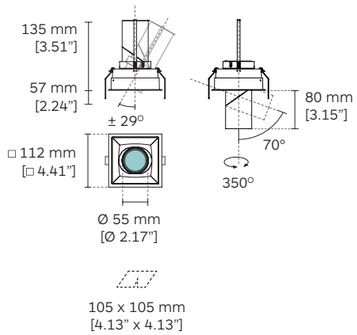

Trimless □ **RU14**

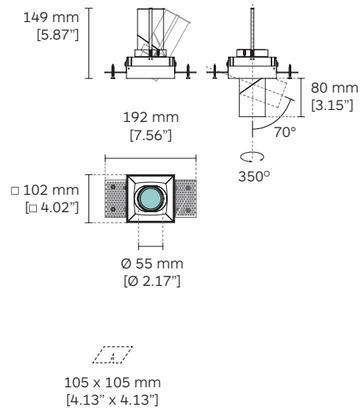

Solo L 70 Round & Square

Product Code	Light Sources Code	CRI & CCT	LED Power	Nominal Lumen	Beam Angle (BA°)
RT86 ○	**MH22**	CRI>90 3000K **High Efficacy**	16W	2485 lm	**18°** / **24°** / **36°**
RT87 ○					
RU13 □	**LC05**	CRI>97 3000K **High Rendering**	17W	1542 lm	**12°** / **18°**
RU14 □			16W	1766 lm	**24°** / **34°**

Dimming Options		CCT Options	
D0	No Dim	**27**	2700K
D1	0-10V Dim	**30**	3000K
DA	Dali Dim	**35**	3500K
DC	CASAMBI	**40**	4000K
DP	Phase Dim		


All dimensions in the catalogue in mm & [inches].
For the most updated product information, please go to our website.

- **54** - Embossed Matt White
- **11** - White
- **1Y** - Embossed Matt Total White
- **65** - Embossed Matt Black
- **10** - Black



Solo L 70

Round & Square







formalighting

Solo L70

The Solo L 70 is a recessed spotlight body constructed from cast aluminum, available in both trim and trimless versions. It is offered in round and square configurations to accommodate a range of applications.


Its distinctive pull-down mechanism enables the Solo L 70 to function as a downlight, a regressed accent light, or an exposed lamp head capable of emulating a surface or track fixture. The specially designed head is fully adjustable, featuring a vertical tilt of up to 70° and horizontal rotation of up to 350°.

Ideally suited for museum and gallery applications.

For complete code ordering information, please see page 77.

Solo L Wallwasher Round & Square



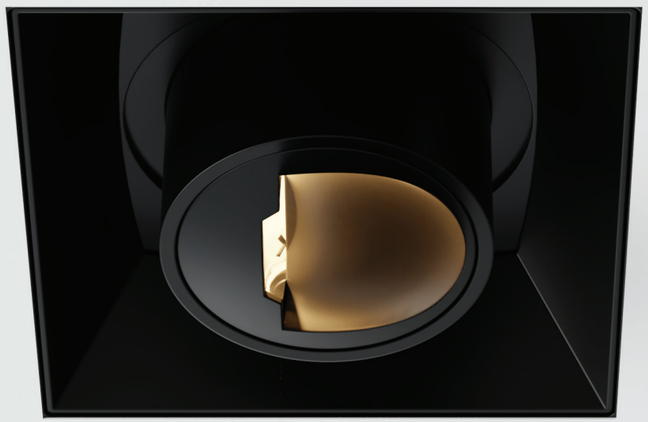


Solo L Wallwasher Round & Square

IP20 | 350°


Available finishes - 54 11 1Y 65 10

Solo L Wallwasher Round

Trim ○ **RU03**




Trimless ○ **RU04**

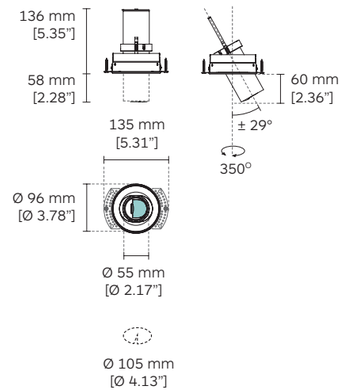


Solo L Wallwasher Square

Trim □ **RU17**



Trimless □ **RU18**

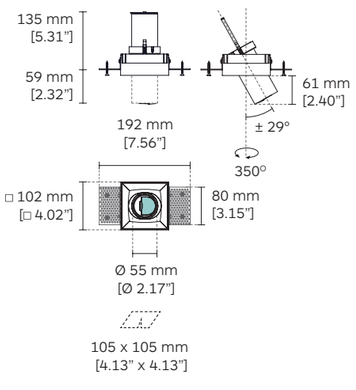

Solo L Wallwasher Round & Square

Product Code		Light Sources Code	CRI & CCT	LED Power	Nominal Lumen	Beam Angle (BA°)
RU03	○	**MH21**	**CRI>90 3000K** High Efficacy	9W	1357 lm	**WW**
RU04	○					
RU17	□	**MC36**	**CRI>97 3000K** High Rendering	9W	975 lm	
RU18	□					


Dimming Options		CCT Options	
D0	No Dim	**27**	2700K
D1	0-10V Dim	**30**	3000K
DA	Dali Dim	**35**	3500K
DC	CASAMBI	**40**	4000K
DP	Phase Dim		

WW = *Wallwasher.*

All dimensions in the catalogue in mm & [inches].
For the most updated product information, please go to our website.

- **54** - Embossed Matt White
- **11** - White
- **1Y** - Embossed Matt Total White
- **65** - Embossed Matt Black
- **10** - Black









Solo L Wallwasher

Round & Square

Solo L Wallwasher

The Solo L Wallwasher is a cast aluminum recessed spotlight body available in trim and trimless versions, with downlight and wallwasher options for diverse applications. Its unique pull-down mechanism allows it to function as a downlight, regressed accent light, or exposed lamp head emulating surface or track fixtures—ideal for museums and galleries.

The Wallwasher version delivers highly uniform illumination for artwork and sculptures, while vertical uniformity brightens the full wall height to create a wide, distinguished spatial impression.

For complete code ordering information, please see page 77.

Solo Round & Square





Solo Round & Square


IP20 | 45° 45° | 360°

Available finishes - 54 | 11 | 1Y | 65 | 10

Solo Round


Trim ○

RQ98

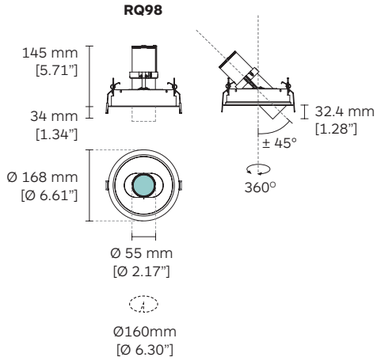

Trimless ○


RQ87

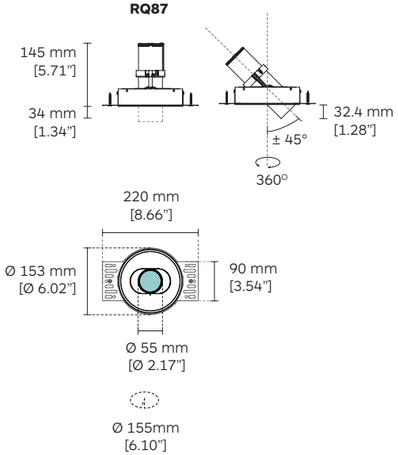

Solo Square


Trim □

RQ99

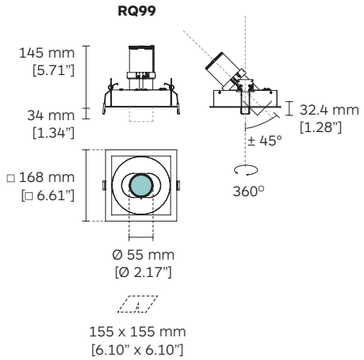

Trimless □

RQ77

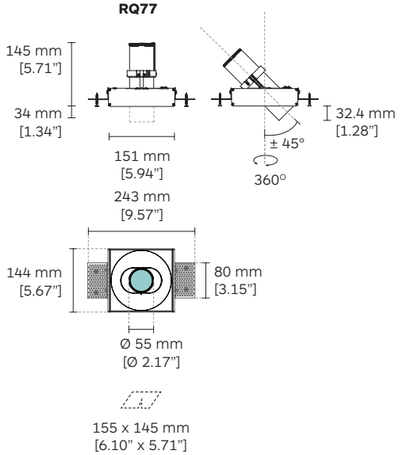


Solo Round & Square

Product Code		Light Sources Code	CRI & CCT	LED Power	Nominal Lumen	Beam Angle (BA°)
RQ98	○	**MH21**	CRI>90 3000K **High Efficacy**	11W	1586 lm	**12°**
RQ87	○					
RQ99	□	**MH22**		16W	2485 lm	**18°** / **25°** / **35°**
RQ77	□					
		MC36	CRI>97 3000K **High Rendering**	17W	1542 lm	**12°** / **24°** / **32°**

Dimming Options		CCT Options	
D0	No Dim	**27**	2700K
D1	0-10V Dim	**30**	3000K
DA	Dali Dim	**35**	3500K
DC	CASAMBI	**40**	4000K
DP	Phase Dim		

All dimensions in the catalogue in mm & [inches].
For the most updated product information, please go to our website.


- **54** - Embossed Matt White
- **11** - White
- **1Y** - Embossed Matt Total White
- **65** - Embossed Matt Black
- **10** - Black

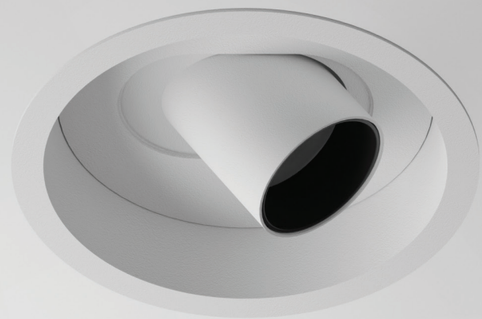



Solo
Round & Square





formalighting

solo

The Solo series are a recessed spotlight body in cast aluminum available in trim and trimless versions. The unique pull-down mechanism enables the Solo to function as either a downlight, a regressed accent light, or an exposed lamp head able to emulate a surface or track fixture.

The special head design of Solo is fully adjustable with vertical tilt up to 45° and rotatable horizontally up to 360°.

Perfect for retail, museums, showrooms, and window displays.

For complete code ordering information, please see page 77.

Symbols & Icons

Symbols & Icons

European Economic Area
Declares that the product complies with all applicable European Union safety, health, and environmental protection requirements.

Canada US
Indicates that the product has been tested and meets Canadian and North American standards requirements standards for safety and performance.

China
A mandatory safety mark required for many products sold or used in the Chinese market.

CLASS II
Luminaires of insulation Class II - With safety isolation, this means the tension conductions element are protected by additional isolation.
The isolation of an earth wire it is not necessary and the connection to it is not allowed.


CASAMBI

Recyclable

IP_ _ Degree of Ingress Protection

1st Number	Protection Against Dust and Solid Objects	2nd Number	Protection Against Moisture and Liquids
0	No-Protection	**0**	No-Protection
1	Protection against solid objects >50 mm	**1**	Protection against dripping water
2	Protection against solid objects >12 mm	**2**	Protection against dripping water tilted > 15 deg
3	Protection against solid objects >2.5 mm	**3**	Protection against spraying water > 30 deg
4	Protection against solid objects >1 mm	**4**	Protection against spraying water
5	Dust - protected	**5**	Protection against water jet
6	Dust - tight	**6**	Protection against waves
		7	Protection against the effects of immersion
		8	Protection against submersion

Black & white finishes types


Finish code	*Finish name and description*	*Finish icon*	*Finish color texture*
1Y	**Embossed matt total white RAL (9016)** *White body + white snoot.*	1Y	
54	**Embossed matt white RAL (9016)** *White body + black snoot.*	54	
11	**White RAL (9003)** *White body + black snoot.*	11	
65	**Embossed matt black RAL (9017)** *Black body + black snoot.*	65	
10	**Black RAL (9004)** *Black body + black snoot.*	10	

Code system

Global presence

Code System

Code ordering example: **R Q 9 8 M H 2 2 - 9 0 3 0 1 8 D 0 5 4**

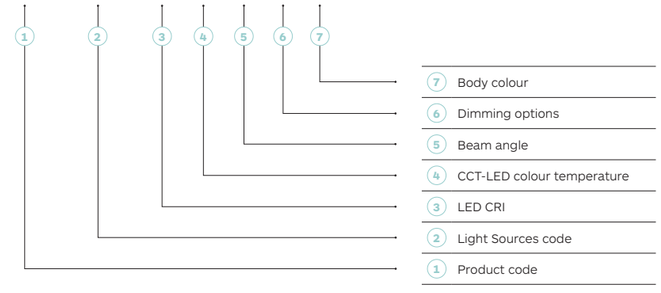

LED CRI	
90	CRI > 90
97	CRI > 97

CCT-LED Colour temperature	
27	Warm White 2700K
30	Warm White 3000K
35	Warm White 3500K
40	Neutral White 4000K


Dimming Options	
D0	No dimming
D1	0-10V Dim
DA	Dali Dim
DC	CASAMBI
DP	Phase Dim

Body Colour	
54	Embossed matt white (RAL 9016)
11	White (RAL 9004)
1Y	Embossed Matt Total White (RAL 9016)
65	Embossed matt black (RAL 9017)
10	Black (RAL 9003)

How to order

Available finishes - **54** **11** **1Y** **65** **10**

Solo Round & Square

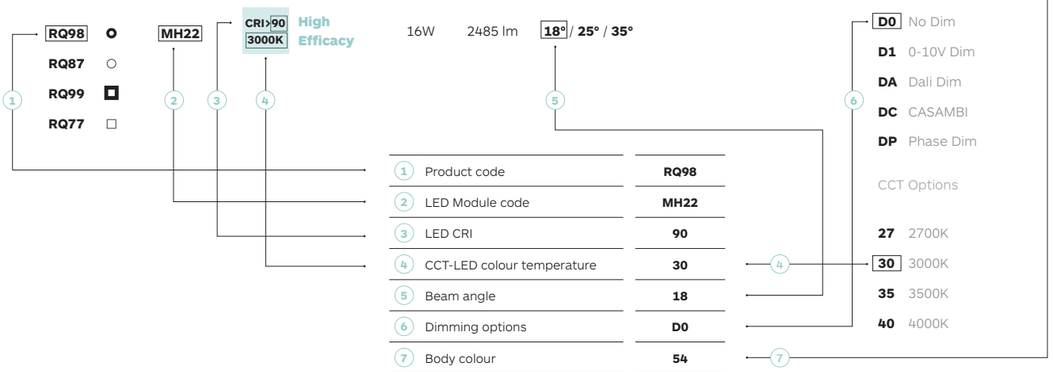

Global presence

Celebrating over 50 years of vision, dedication and innovation, formalighting's versatile and high-quality product offerings extends internationally via our headquarters in Hong Kong, London, Milan and Shanghai.
Our well chosen and selected partners as well as our affiliated international offices broaden our global presence further in markets such as USA, Australia, Japan, South East Asia, India and the Middle East.

Through our commitment to growth and investment within formalighting's professional team, infrastructure and product ranges, we are able to provide increasing service to our global retail and hospitality clients as well as lighting designers and specifiers strengthening our position as a leading international supplier of innovative architectural lighting solutions and systems.

With over 50 years' experience in designing and manufacturing architectural lighting, formalighting's comprehensive portfolio offers a competitive range of European designed and expertly engineered products that carry CB, CE, CCC and UL certifications.

Furthermore formalighting's latest award-winning motorized range of track, pendant, and recessed fixtures, featuring remote-controlled adjustable pan and tilt, dim, dim to warm, tuneable white and beam shaping lens, are available worldwide incorporating the latest, most advanced lighting technologies.

MILAN
EUROPE HEADQUARTERS

Tel (+39) 02 9354 0300
Fax (+39) 02 9343 5117
E- mail info-europe@formalighting.com

HONG KONG
ASIA HEADQUARTERS

Tel (+ 852) 2516 6500
Fax (+ 852) 2516 6525
E- mail info-asia@formalighting.com

NEW YORK
LOCAL SALES OFFICE

E- mail info-us@formalighting.com

SHANGHAI
LOCAL SALES OFFICE

E- mail info-china@formalighting.com

LONDON
LOCAL SALES OFFICE

E- mail info-uk@formalighting.com

AUSTRALIA
LOCAL SALES OFFICE

Tel (+61) 488 567 388
E- mail info-australia@formalighting.com

INDIA
LOCAL SALES OFFICE

Tel (+91) 9686351257
E- mail info-india@formalighting.com

formalighting is constantly developing and improving its products therefore all information, drawings illustrations, specifications, photometric values in this catalogue are indicatives and shall not form part of any commitment by our company that reserves the right to change specifications without prior notification or public announcement.
Technical information on the installation-instruction has precedence over the information in the catalogue.
Our general terms and conditions shall apply notwithstanding any stipulation on the contrary to all the orders and agreement with formalighting. You can obtain a copy of these conditions on demand.

Publication date: November 2026
©Copyright formalighting

With thanks to all contributors for the realization of this catalogue

Designed by formalighting's Graphic Design Department

No part of this catalogue may be copied without written authorization of formalighting

formalighting

formalighting

MILAN

-

LONDON

-

USA

-

HONG KONG

-

SHANGHAI

-

INDIA