


Cobra Linealuce | G449

Cobra
Linealuce




Min. L= 120mm (4 x LED)




Mounting options

With mounting U clip




Accessories

Honeycomb Art. 2D88



Max. L= 960 mm (32 x LED)

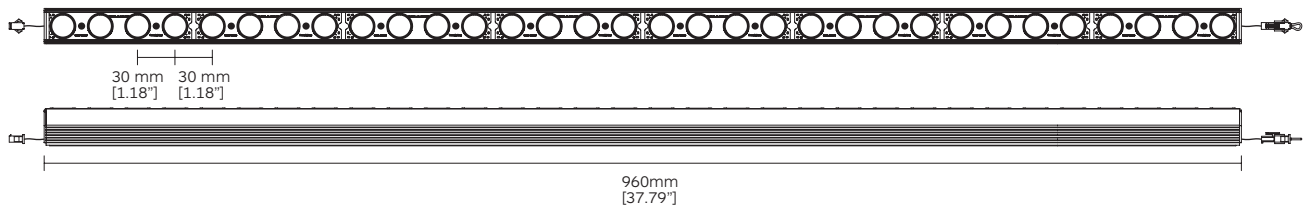

Available length codes


No. of LEDs	Voltage	LED Power	Length code	Length in mm	Length in inches	Nominal Lumen	No. of LEDs	Voltage	LED Power	Length code	Length in mm	Length in inches	Nominal Lumen
4	6.6V	6.3W	0120	120	4.72	732 lm	20	33V	31.5W	0600	600	23.62	3660 lm
8	13.2V	12.6W	0240	240	9.44	1464 lm	24	39.6V	37.8W	0720	720	28.34	4392 lm
12	19.8V	18.9W	0360	360	14.17	2196 lm	28	46.2V	44.1W	0840	840	33.04	5124 lm
16	26.4V	25.2W	0480	480	18.89	2928 lm	32	52.8V	50.4W	0960	960	37.79	5856 lm

Code ordering example: **G 4 4 9 0 1 2 0 - 9 0 2 7 1 0 0 0 1 0**


	Product code*	Length code	Light Source	>CRI	CCT**	LED Power	Nominal Lumen	Beam angle (BA°)	Driver Options	Finish
Cobra Linealuce	G449	0120	4 x LED	90	27 2700K	1.5W/LED	183lm/LED	10 / 17 / 29 / EL / WW	00 No Driver	10 ■ Black
Min & Max. Length		0960	32 x LED		30 3000K					11 □ White
					35 3500K					28 ■ Brass Polished
					40 4000K					35 ■ Gold

Driver Options

Constant Current

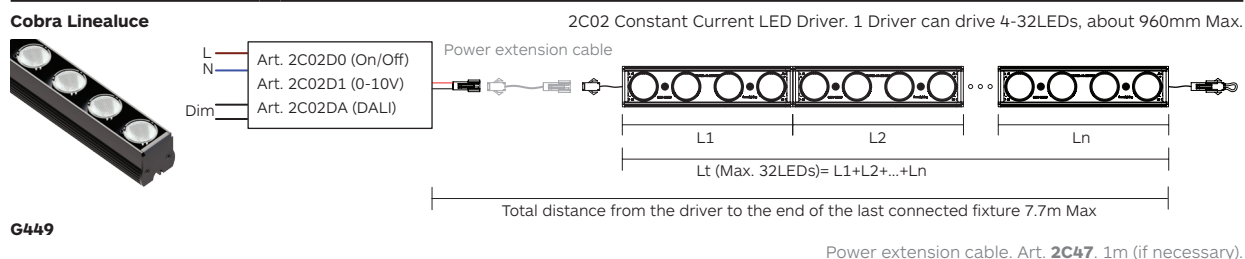

Accessories

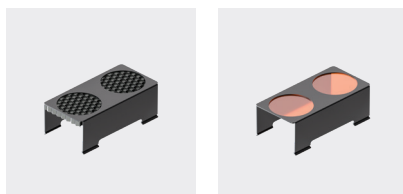

Product / Accessories

Honeycomb

Coloured
Filters

Colour 10

Colours 25,42,55,85

Cobra Linealuce

2D88

2E40

* Please refer to the user manuals for further details.