

# Cobra Pro IP66

Fixed



Cobra Pro IP66 Fixed | G301



Cobra Pro IP66 Fixed with Honeycomb | G306

## Body

Surface mounted modular system in die cast aluminium.  
Available in different length configurations based on a 83mm link (2 LED per link) with a 76mm increment.  
Section 34x36.6mm.  
Its flexible structure maintain a constant 38mm pitch between the LED.

Mounting options:  
Fixed brackets.

**\* Plastic free packaging.**

## Accessories

Mounting accessories included.  
Alluminium louvre Art. 2C97  
Power extension cable Art. 2D47 to be ordered separately.

## Finish

Powder coat in black, white or grey finish.  
Other finish options available on request.

## LED sources

Power LED.  
CRI: 75 & 90 | R9: >90 | CCT: 2100K, 2400K, 2700K, 3000K, 3500K, 4000K.  
3-Step MacAdam.  
Other CRI and CCT options available on request.

## Optic

Lens.  
Beam angle: 17° / 29° / elliptical (15° x 50°).  
Wallwasher optics.


## Driver

Driver not included to be ordered separately.  
Work with 1050 mA Constant Current Driver positioned remotely.

## Applications


Ideal for external indirect cove illumination, it creates a wall grazing effect for columns and curved architectonic surfaces. Its flexible structure maintain a constant pitch between LED, insuring a continuous illumination without any shadows or dark areas. Application areas: Cove light, wallwash, residential, hospitality, restaurants, museums.

## Related Products

**Cobra Linealuce** 

**Cobra Flex** 

**Cobra Flex Chain** 

**Cobra Linealuce Louvre** 

**Cobra Flex Louvre** 

**Cobra Flex Chain Louvre** 

**Cobra Pro IP66 Adjustable** 










# Driver Options

## Constant Current

### Cobra Pro IP66

Constant Current LED Driver. 1 Driver can drive 2-32LEDs, about 1223mm Max

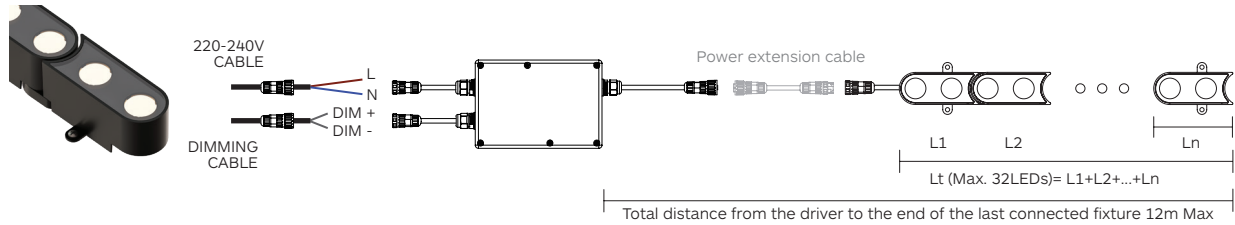


Vin= 180-277V AC 50/60Hz  
Iout= 1050mA V=2-57V P= 60W Max.  
Dimensions: 123.5x81.5x23mm  
IP66

### G301 / G302

Power extension cable. Art. **2D47**. 1m (if necessary).

### Cobra Pro IP66 with honeycomb

Constant Current LED Driver. 1 Driver can drive 2-32LEDs, about 1223mm Max

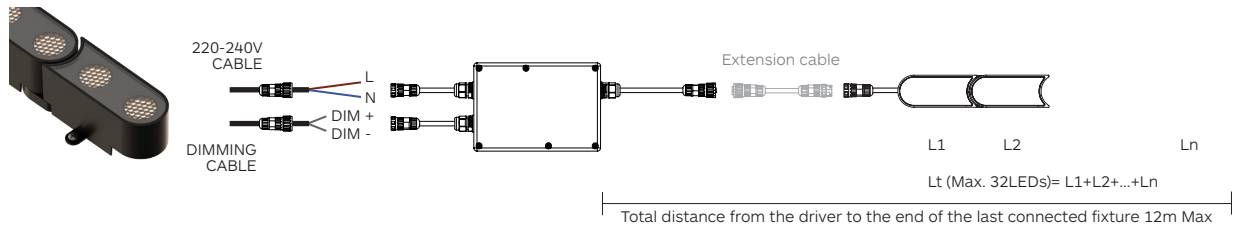

Vin= 180-277V AC 50/60Hz  
Iout= 1050mA V=2-57V P= 60W Max.  
Dimensions: 123.5x81.5x23mm  
IP66

# Accessories



Louvre

Product / Accessories

Finish: 10

Cobra Pro IP66 Adjustable

**2C97**

\* Please refer to the user manuals for further details.