

Microline

5 x 5



Body

Surface mounted modular LED system in extruded aluminium.
Available in different length configurations starting from 55mm with increment of 45mm.
Section 5.8mm width and 5mm height.

Mounting options:
U clips.
Double sided tape.

*** Plastic free packaging.**

Accessories

Mounting accessories included.
Extension cable Art. 2D58 to be ordered separately.

Finish

Anodized black or aluminium finish.

LED sources

SMD.
CRI: 97 | R9: >90 | CCT: 2700K, 3000K, 3500K, 4000K. 3-Step
McAdam.
Other CRI and CCT options available on request.

Optic

Extra Wide Beam Angle.
Opal Rigid Diffuser (RD).

Driver

Driver not included to be ordered separately.
Work with 24V Constant Voltage Driver positioned remotely.

Applications


Micro linear light system with a disappearing look delivers an homogenous and diffuse light effect. Ideal for tiny showcase and under cabinet illumination.
Application areas: Retail, cabinet displays, showcases, jewelry displays, residential, restaurants, museums.

Related Products

Microline
7 x 7



Microline 5 x 5 | 16W/m | G466

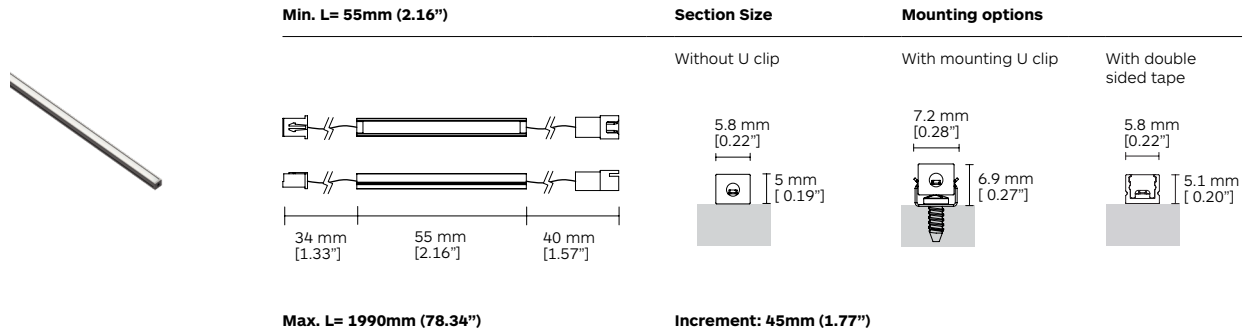

Available length codes

LED Power	Length code	Length in mm	Length in inches	Nominal Lumen	LED Power	Length code	Length in mm	Length in inches	Nominal Lumen	LED Power	Length code	Length in mm	Length in inches	Nominal Lumen
0.72W	0055	55	2.16	78 lm	11.52W	0730	730	28.74	1037 lm	22.32W	1405	1405	55.31	1995 lm
1.44W	0100	100	3.93	142 lm	12.24W	0775	775	30.51	1100 lm	23.04W	1450	1450	57.08	2059 lm
2.16W	0145	145	5.70	206 lm	12.96W	0820	820	32.28	1164 lm	23.76W	1495	1495	58.85	2123 lm
2.88W	0190	190	7.48	270 lm	13.68W	0865	865	34.05	1228 lm	24.48W	1540	1540	60.62	2187 lm
3.60W	0235	235	9.25	334 lm	14.40W	0910	910	35.82	1292 lm	25.20W	1585	1585	62.40	2251 lm
4.32W	0280	280	11.02	398 lm	15.12W	0955	955	37.59	1356 lm	25.92W	1630	1630	64.17	2315 lm
5.04W	0325	325	12.79	461 lm	15.84W	1000	1000	39.37	1420 lm	26.64W	1675	1675	65.94	2378 lm
5.76W	0370	370	14.56	525 lm	16.56W	1045	1045	41.14	1484 lm	27.36W	1720	1720	67.71	2442 lm
6.48W	0415	415	16.33	589 lm	17.28W	1090	1090	42.91	1548 lm	28.08W	1765	1765	69.48	2506 lm
7.20W	0460	460	18.11	653 lm	18.00W	1135	1135	44.68	1612 lm	28.80W	1810	1810	71.25	2570 lm
7.92W	0505	505	19.88	717 lm	18.72W	1180	1180	46.45	1676 lm	29.52W	1855	1855	73.03	2634 lm
8.64W	0550	550	21.65	781 lm	19.44W	1225	1225	48.22	1739 lm	30.24W	1900	1900	74.80	2698 lm
9.36W	0595	595	23.42	845 lm	20.16W	1270	1270	50.00	1803 lm	30.96W	1945	1945	76.57	2762 lm
10.08W	0640	640	25.19	909 lm	20.88W	1315	1315	51.77	1867 lm	31.68W	1990	1990	78.34	2826 lm
10.80W	0685	685	26.96	973 lm	21.60W	1360	1360	53.54	1931 lm					

Code ordering example: **G 4 6 6 0 0 5 5 - 9 7 2 7 RD 0 0 1 0**


	Product code*	Length code***	Light Source	>CRI	CCT**	LED Power	Nominal Lumen	Diffuser	Driver Options	Finish
Microline 5 x 5	G466	0055	LED	97	27 2700K	16W/m	1420 lm/m	RD	00 No Driver	10 ■ Black
Min & Max. Length		1990			30 3000K					70 ■ Aluminium
					35 3500K					
					40 4000K					

Driver Options

Constant Voltage

Microline 5 x 5

2V24 Constant Voltage LED Driver. 1 Driver for Maximum 3.5m long fixtures.

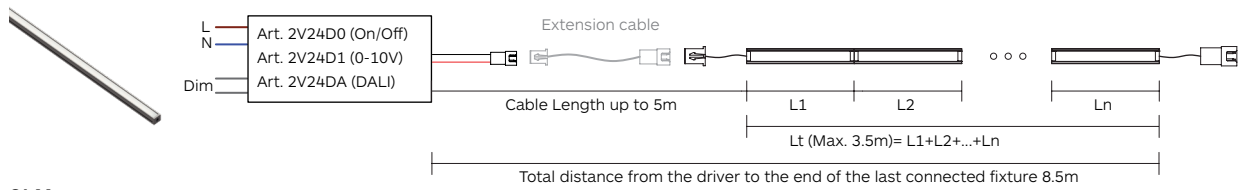

G466

Extension cable. Art. **2D58**. 1m (if necessary).

Vin= 90-305V AC 50/60Hz
Vout= 24VDC 2.5A 60W Max.
Dimensions: 150x53x35mm
IP67